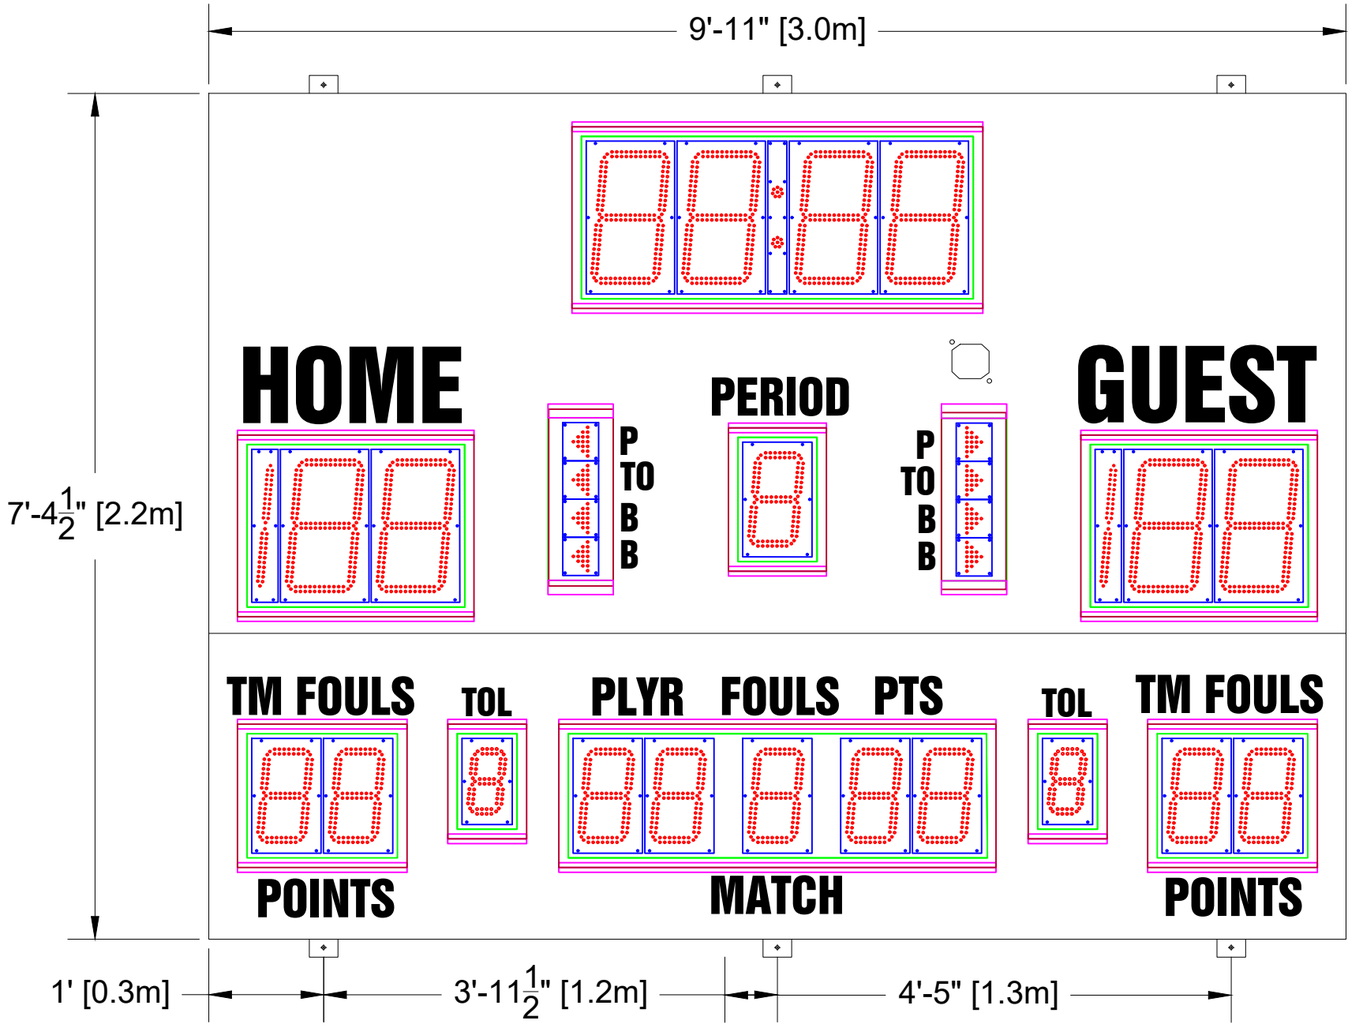

Scoreboard Specifications

Overall size: 9' (W) x 7'4 $\frac{1}{2}$" (H) x 4" (D)
Approximate Weight: 258 lbs
Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 5 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: TOP of the Scoreboard

14" LED Digits for TIME, SCORE
10" LED Digits for PERIOD, TM FOULS, PLAYER, FOULS, POINTS
7" LED Digits for TOL
2" LED Arrows

8" White Vinyl Lettering for HOME, GUEST
4" White Vinyl Lettering for PERIOD, TM FOULS, PLYR, FOULS, PTS, MATCH, POINTS
3" White Vinyl Lettering for P, TO, B, TOL

All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle
*

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	7/2/2020

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30'

THIRD ANGLE PROJECTIONS

OES SCOREBOARDS Inc.
4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION
OES ELECTRONIC SCOREBOARDS
M5010BTXV

SIZE	FILENAME	INIT DRAWING DATE	REV
B	M5010BTXV	7/2/20	A
	USAGE: USE FOR REVIEW		

SCALE	DRAWN BY	PAGE
NTS	MLI	1 OF 1