

Scoreboard Specifications

Overall size: 9' (W) x 7'4 1/2" (H) x 4" (D)
Approximate Weight: 260 lbs
AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz.
Requires an earth ground connection.
Incoming Mains Power and Data Location: TOP of the Scoreboard
MAX Current Draw: 5.6 Amps


14" LED Digits for TIME, SCORE
10" LED Digits for PERIOD, TM FOULS, PLAYER FOULS
7" LED Digits for TOL
2" LED Arrows


5" Electronic Team Names at 8 CHARACTERS

4" White Vinyl Lettering for PERIOD, TM FOULS, PLAYER FOULS, MATCH, POINTS
3" White Vinyl Lettering for P, TO, B, TOL

Optional AD Space:
LEFT: 30.5" (W) X 23" (H)
RIGHT: 22" (W) X 23" (H)

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

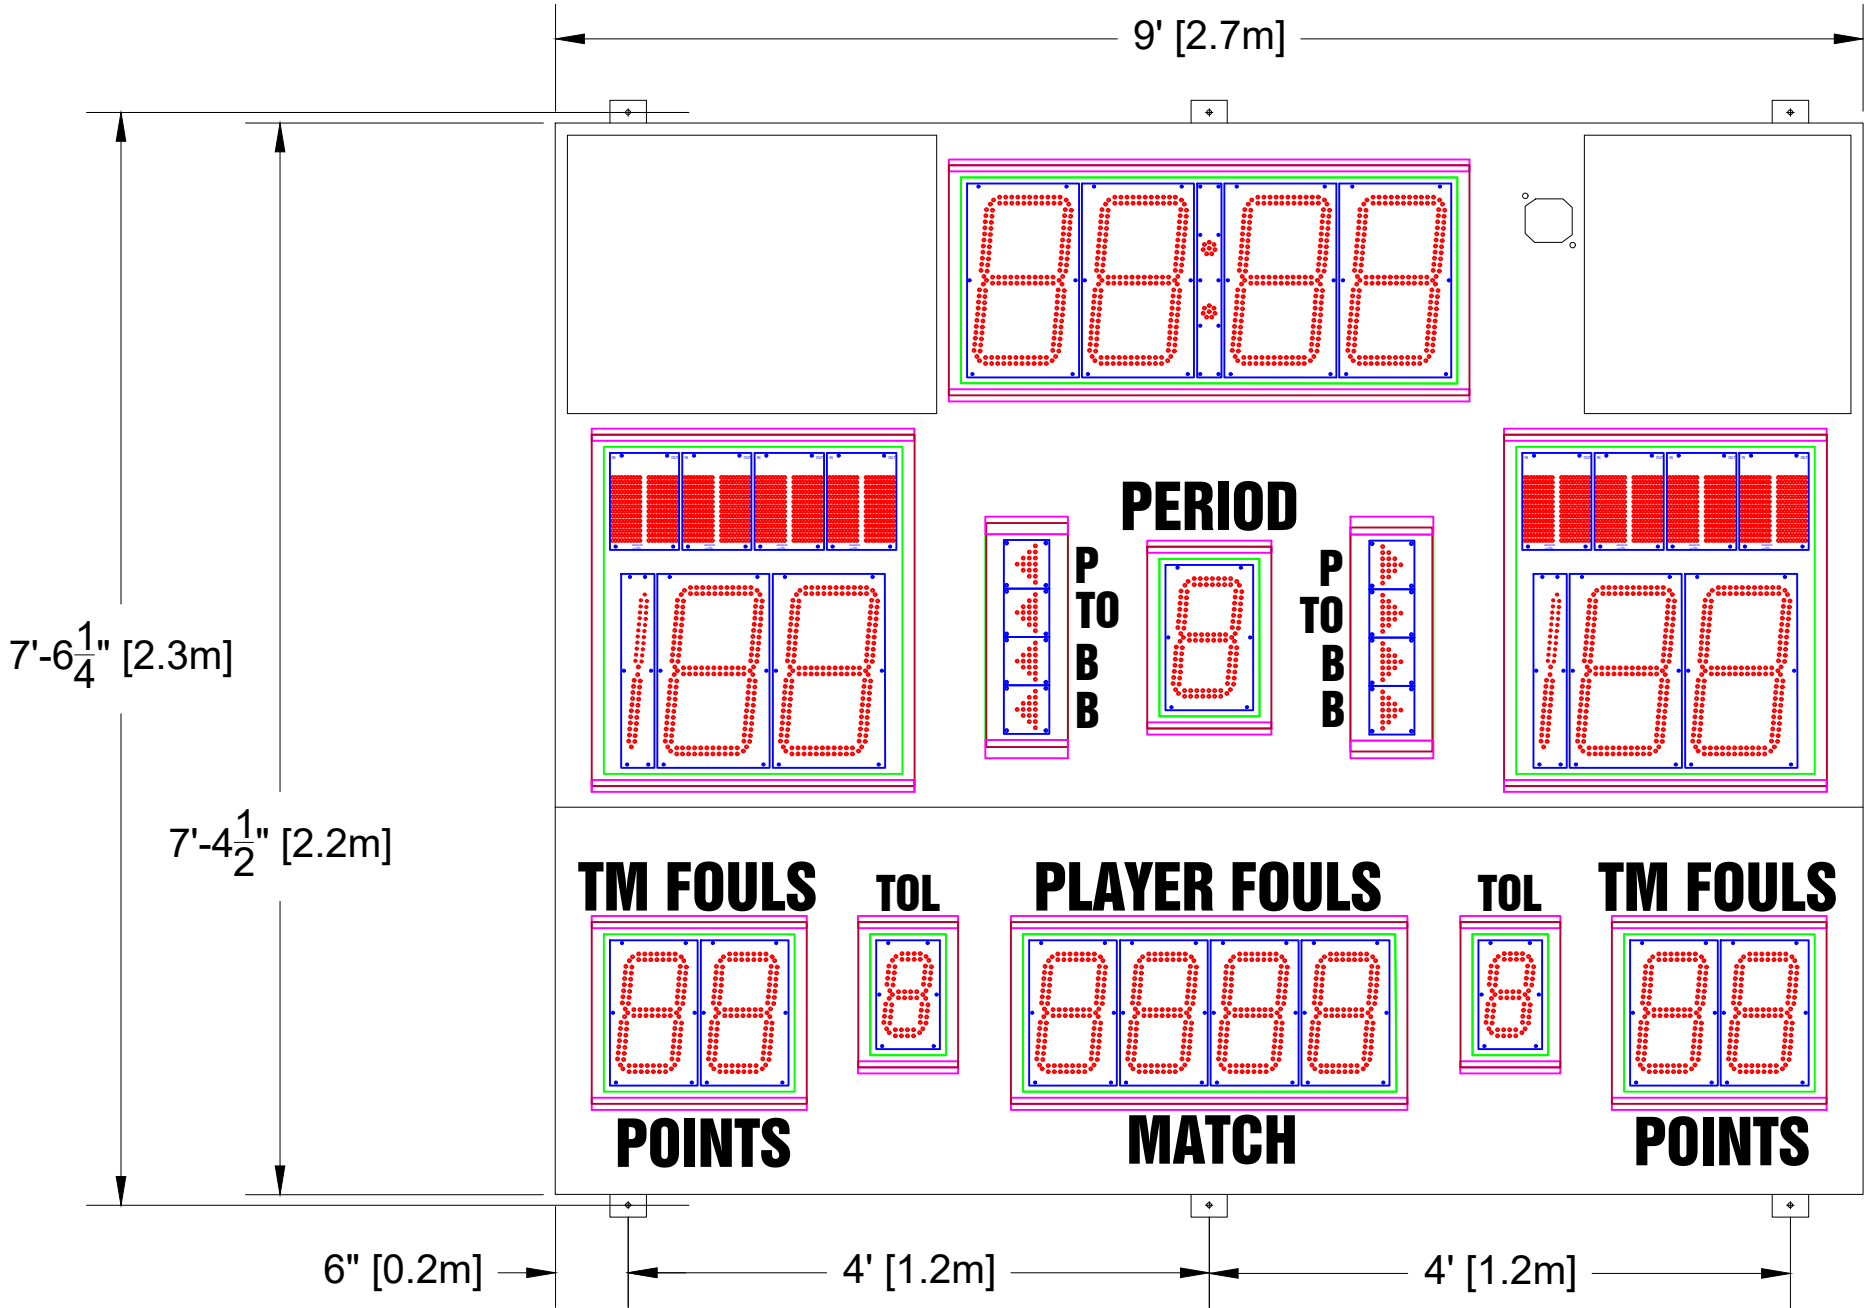

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	7/14/2021
B	ADD AD SPACE DETAILS	OES	7/14/2021
		<div><div><div>OES</div><div>SCOREBOARDS</div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:			
OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		DESCRIPTION	
		OES ELECTRONIC SCOREBOARDS M5009CICE	
TOLERANCE INFORMATION Dimensions are in Inches		SIZE	INIT DRAWING DATE
<div><div><div>THIRD ANGLE PROJECTIONS</div><div></div></div><div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div></div>		FILENAME M5009CICE	7/14/21
		A	REV B
		USAGE	
		USE FOR REVIEW	
		CGTHOMPSON	
SCALE		NTS	PAGE 1 OF 1