

Scoreboard Specifications


Overall size: 9' (W) x 7'4 1/2" (H) x 4" (D)  
Approximate Weight: 242 lbs  
AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz.  
Requires an earth ground connection.  
Incoming Mains Power and Data Location: TOP of the Scoreboard  
MAX Current Draw: 2.9 Amps

14" LED Digits for TIME, SCORE  
10" LED Digits for PERIOD, TM FOULS, PLAYER FOULS  
7" LED Digits for TOL  
2" LED Arrows

8" White Vinyl Lettering for HOME, GUEST  
4" White Vinyl Lettering for PERIOD, TM FOULS, PLAYER FOULS, MATCH, POINTS  
3" White Vinyl Lettering for P, TO, B, TOL

Optional AD Space:  
LEFT: 30.5" (W) X 23" (H)  
RIGHT: 22" (W) X 23" (H)

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

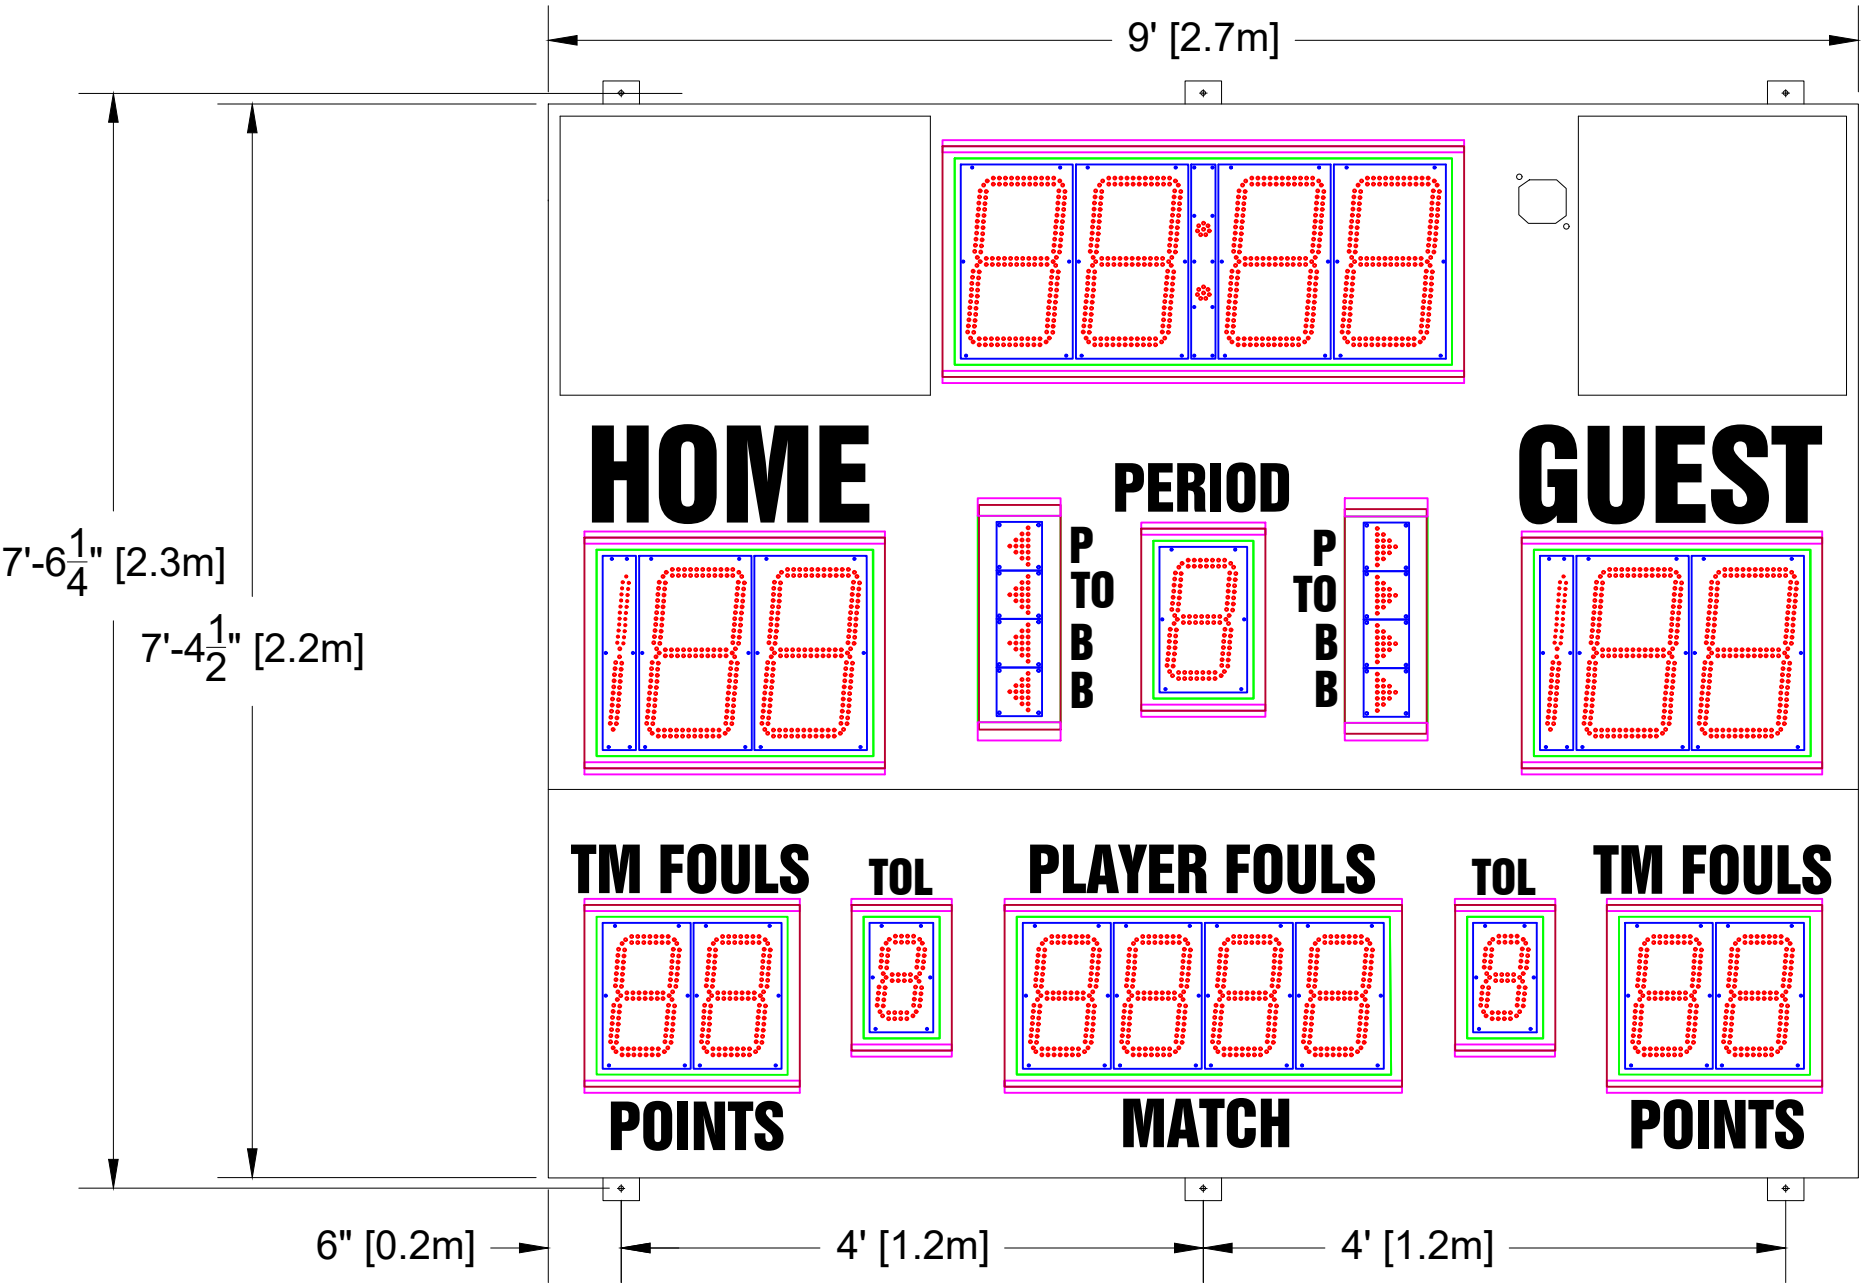

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	7/14/2021
B		ADD AD SPACE DETAILS		OES	7/14/2021
		<div><div><div><div>OES</div><div>SCOREBOARDS</div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div></div>			
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		DESCRIPTION			
OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		OES ELECTRONIC SCOREBOARDS M5009CICV			
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS		SIZE	FILENAME
<div>Fractional ± 1/16"</div> <div>Two Place Decimals ± 0.02"</div> <div>Three Place Decimals ± 0.005"</div> <div>Four Place Decimals ± 0.0005"</div> <div>Angular ± 30'</div>				M5009CICV	
				INIT DRAWING DATE	
				7/14/21	
		A		USAGE	
				USE FOR REVIEW	
				B	
				CGTHOMPSON	
				PAGE 1 OF 1	