

SCOREBOARD SPECIFICATIONS

Overall size: 8'-5 1/2" (W) x 4'-4" (H) x 6" (D)
Approximate Weight: 211 lbs

36" LED Digits

All LED digits include the following:

- *Shatter Resistant Lexan cover
- *Conformal coating to protect from environmental conditions
- *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS


Electrical Ratings:
- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz.
Requires an earth ground connection.

- MAX Current: 5.9 Amps

- AC Current Rating of Fuse or Circuit Breaker within SB: 8 Amps

Incoming AC Mains (Power Cord) and Data Location:
Right Side of the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard
to be determined by customer in accordance
with all local electrical codes.

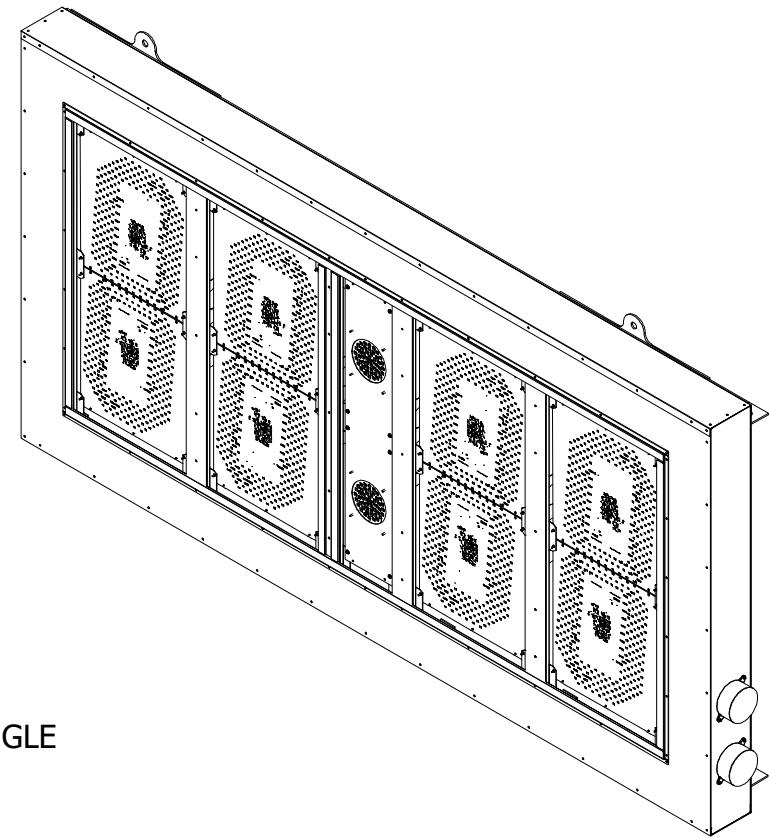


REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	2023-03-10	ELeClair

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.</div> <div>TOLERANCE INFORMATION Dimensions are in inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 2°</div>		<div>THIRD ANGLE PROJECTION</div> <div></div>	
SIZE	FILENAME	INIT DRAWING DATE	REV
B	1236OCE-INFO.idw	2023-03-10	A
USE FOR REVIEW			
SCALE	NTS	DRAWN BY	ELeClair
		PAGE 1 OF 1	



4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

OES ELECTRONIC SCOREBOARDS
M1236OCE

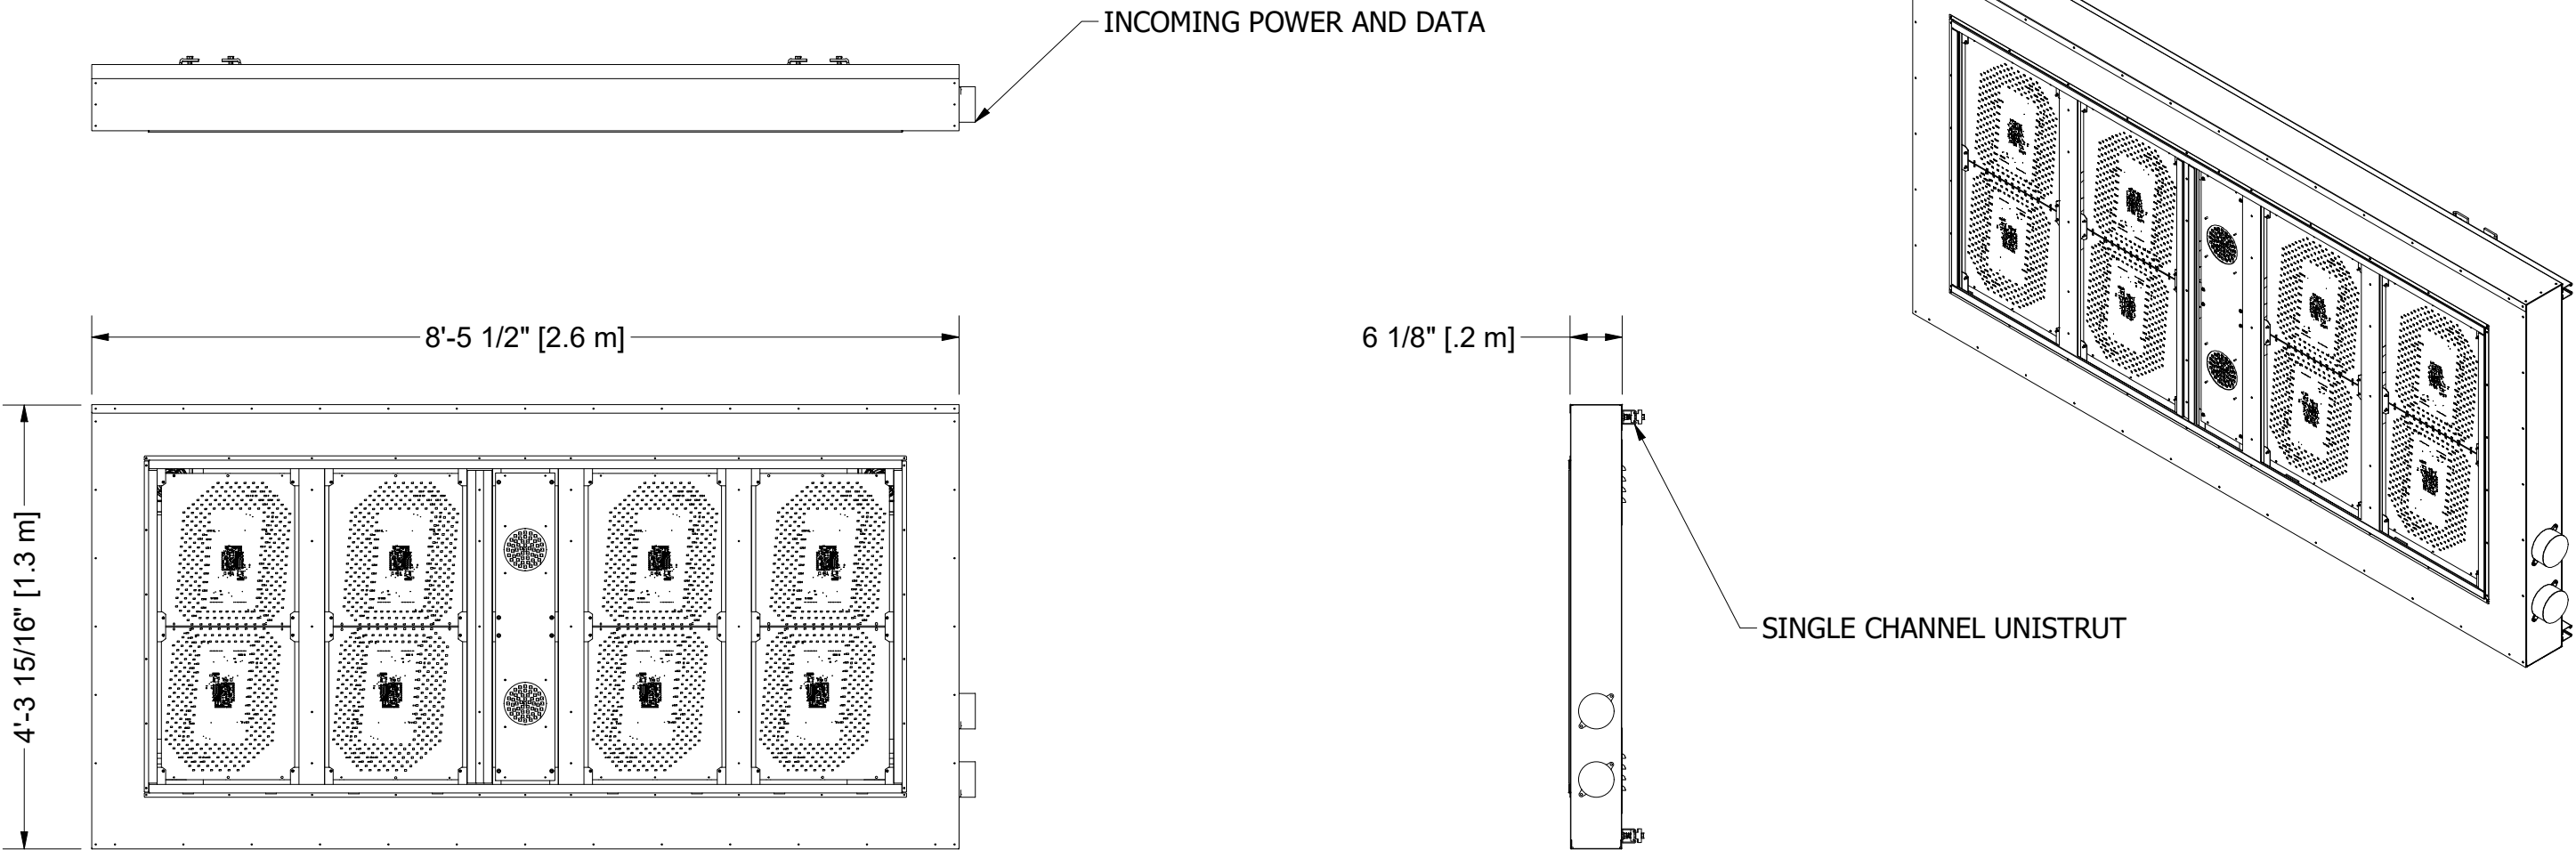

SCOREBOARD SPECIFICATIONS

Overall size: 8' 5 1/2" (W) x 4'-4" (H) x 6" (D)
Approximate Weight: 211 lbs

36" LED Digits

- All LED digits include the following:
- *Shatter Resistant Lexan cover
 - *Conformal coating to protect from environmental conditions
 - *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

- Electrical Ratings:
- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz. Requires an earth ground connection.
 - MAX Current: **5.9** Amps
 - AC Current Rating of Fuse or Circuit Breaker within SB: **8** Amps

Incoming AC Mains (Power Cord) and Data Location:
Right Side of the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard
to be determined by customer in accordance
with all local electrical codes.

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	2023-03-10	ELeClair

<div></div> <div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWINGS INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.</div>		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
		DESCRIPTION OES ELECTRONIC SCOREBOARDS M1236UCE	
SIZE	FILENAME	INIT DRAWING DATE	REV
B	1236UCE-INFO.idw	2023-03-10	A
USE FOR REVIEW			
SCALE	NTS	DRAWN BY	ELeClair
		PAGE 1 OF 1	

TOLERANCE INFORMATION
Dimensions are in inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 2°

THIRD ANGLE
PROJECTION