

SCOREBOARD SPECIFICATIONS

Overall size: 8' 2-1/2" (W) x 3' 10" (H) x 6" (D)
Approximate Weight: 206 lbs

30" LED Digits

- All LED digits include the following:
- *Shatter Resistant Lexan cover
 - *Conformal coating to protect from environmental conditions
 - *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:
- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz.
Requires an earth ground connection.


- MAX Current: **5.9** Amps
- AC Current Rating of Fuse or Circuit Breaker within SB: **8** Amps

Incoming AC Mains (Power Cord) and Data Location:
Right Side of Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard
to be determined by customer in accordance
with all local electrical codes.

| REVISION HISTORY | | | |
|------------------|----------------|------------|---------|
| REV | DESCRIPTION | DATE | AUTHOR |
| A | INITIAL DESIGN | 2023-03-07 | RDonald |

| | | | |
|---|------------------|--|--------|
| <div></div> <div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWINGS INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.</div> <div>TOLERANCE INFORMATION Dimensions are in inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 2'</div> | | 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com | |
| | | DESCRIPTION OES ELECTRONIC SCOREBOARDS M1230OCE | |
| SIZE | FILENAME | INIT DRAWING DATE | REV |
| B | 1230OCE-INFO.idw | 2023-03-07 | A |
| USE FOR REVIEW | | | |
| SCALE | NTS | DRAWN BY | PAGE |
| | | RDonald | 1 OF 1 |

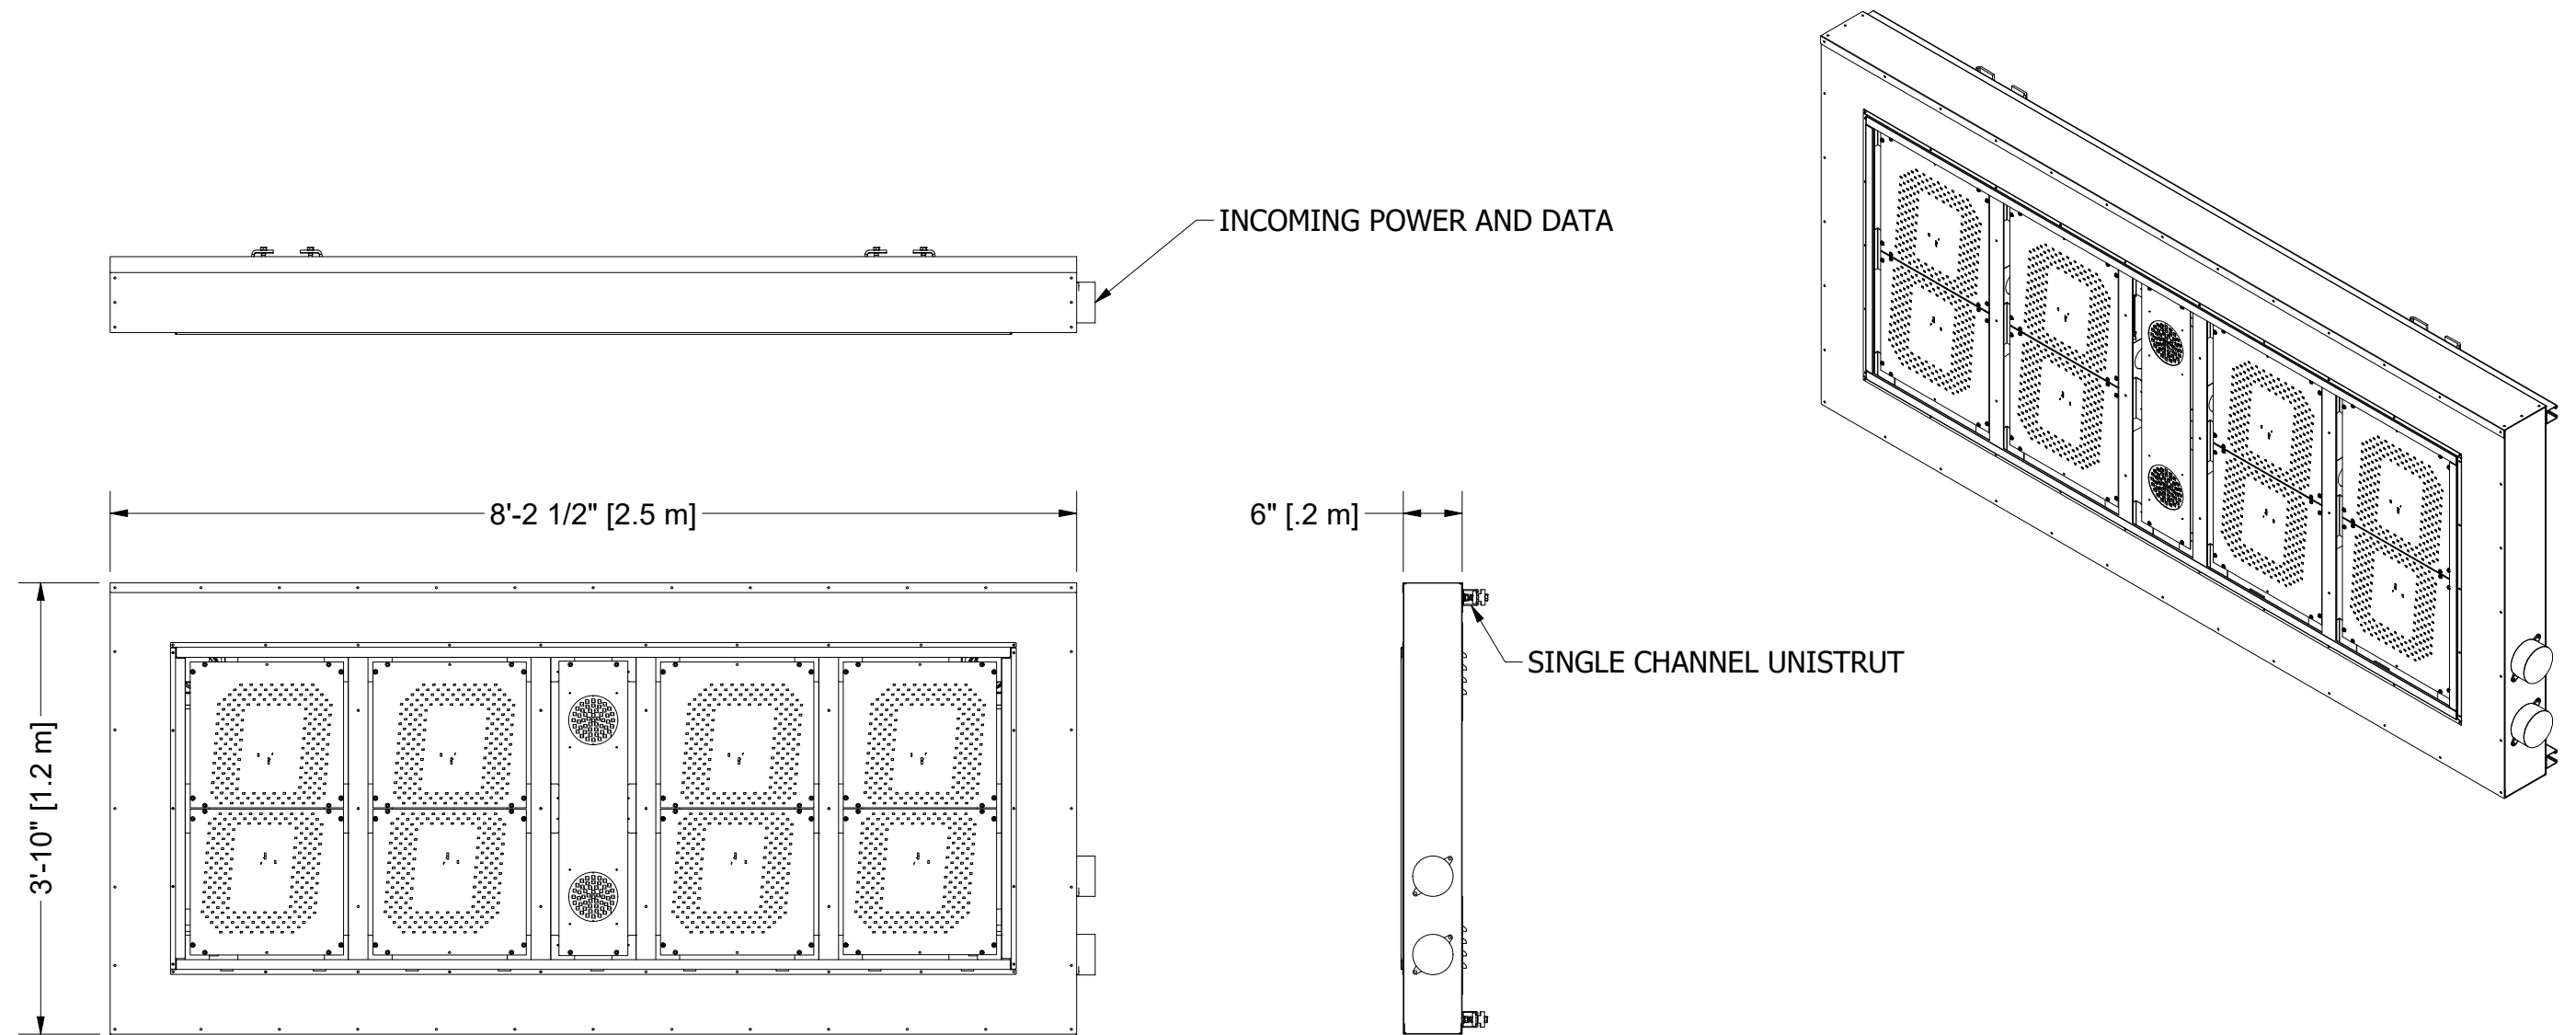

SCOREBOARD SPECIFICATIONS

Overall size: 8' 2-1/2" (W) x 3' 10" (H) x 6" (D)
Approximate Weight: 206 lbs

30" LED Digits

- All LED digits include the following:
- *Shatter Resistant Lexan cover
 - *Conformal coating to protect from environmental conditions
 - *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:
- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz.
Requires an earth ground connection.

- MAX Current: **5.9** Amps
- AC Current Rating of Fuse or Circuit Breaker within SB: **8** Amps

Incoming AC Mains (Power Cord) and Data Location:
Right Side of Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard
to be determined by customer in accordance
with all local electrical codes.

| REVISION HISTORY | | | |
|------------------|----------------|------------|---------|
| REV | DESCRIPTION | DATE | AUTHOR |
| A | INITIAL DESIGN | 2023-03-07 | RDonald |

| | | | |
|-------------------------|------------------|--|--------|
| | | 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com | |
| | | DESCRIPTION OES ELECTRONIC SCOREBOARDS M1230UCE | |
| SIZE | FILENAME | INIT DRAWING DATE | REV |
| B | 1230UCE-INFO.idw | 2023-03-07 | A |
| USAGE USE FOR REVIEW | | | |
| SCALE | NTS | DRAWN BY | PAGE |
| | | RDonald | 1 OF 1 |

| | |
|--|-------------------------------|
| NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWINGS INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC. | |
| TOLERANCE INFORMATION Dimensions are in inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 2° | THIRD ANGLE PROJECTION |