

**Scoreboard Specifications**

Overall size: 36' (W) x 9'-4" (H) x 6" (D)  
Approximate Weight: 1484 lbs  
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD  
22" LED Digits for DOWN, TO GO, BALL ON, QTR  
17" LED Digits for TOL

10" Electronic Team Names of 8 characters


14" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR  
10" White Vinyl Lettering for TOL

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/19/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:  OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches  Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	

DESCRIPTION <b>OES ELECTRONIC SCOREBOARDS M8036AxCE</b>			
SIZE <b>A</b>	FILENAME M8036AUXE  USAGE <b>USE FOR REVIEW</b>	INIT DRAWING DATE 12/19/21	REV <b>A</b>
SCALE <b>NTS</b>	DRAWN BY <b>MLI</b>	PAGE 1 OF 1	

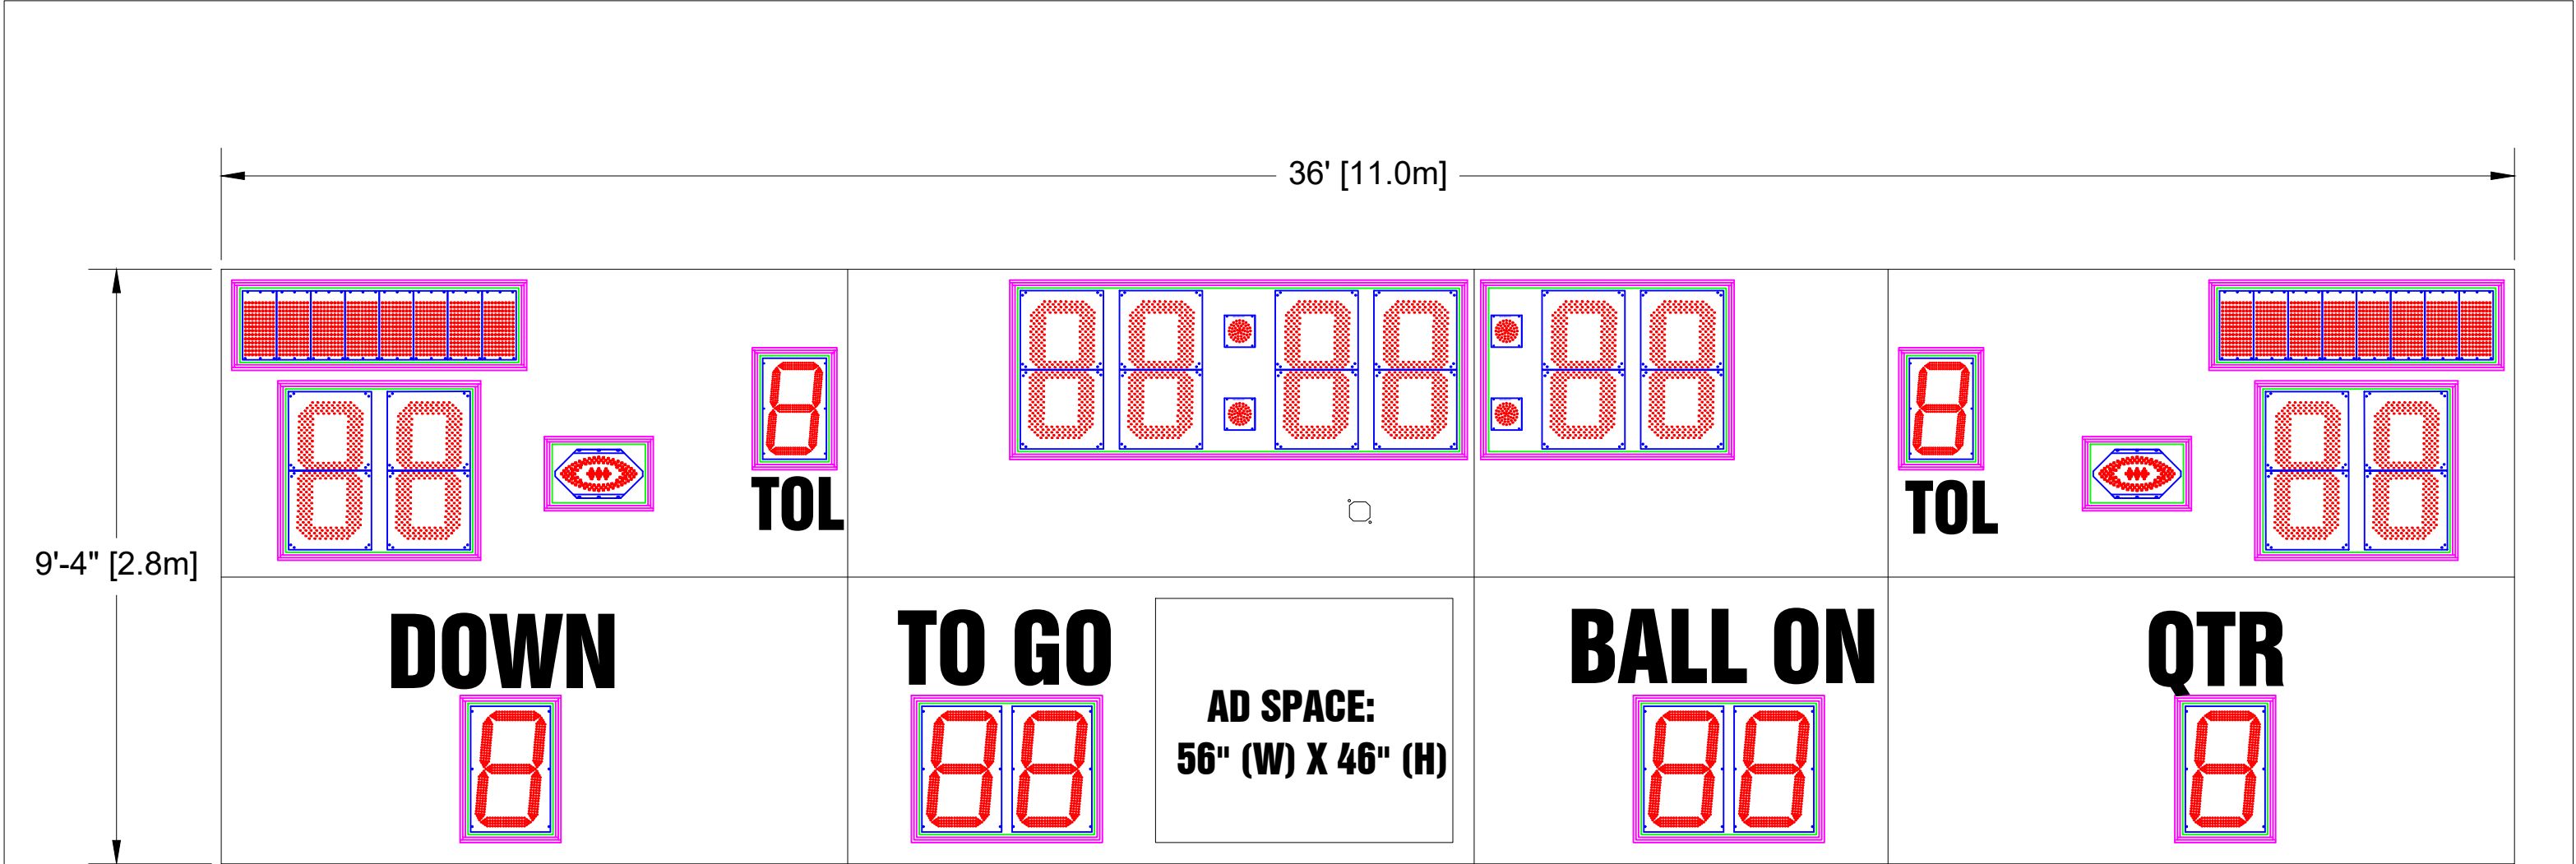

**Scoreboard Specifications**

Overall size: 36' (W) x 9'-4" (H) x 6" (D)  
Approximate Weight: 1515 lbs  
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD  
22" LED Digits for DOWN, TO GO, BALL ON, QTR  
17" LED Digits for TOL

10" Electronic Team Names of 8 characters

14" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR  
10" White Vinyl Lettering for TOL

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	4/1/2020

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8036AUXE-H	4/1/20	A
USAGE			
USE FOR REVIEW			
SCALE	NTS	DRAWN BY	PAGE
		CGTHOMPSON	1 OF 1

4056 Blakie Road,  
London, ON, N6L 1P7  
Tel: (519) 652-5833  
Fax: (519) 652-3795  
Email: oes@oes-inc.com


DESCRIPTION

OES ELECTRONIC SCOREBOARDS  
M8036AxCE-H







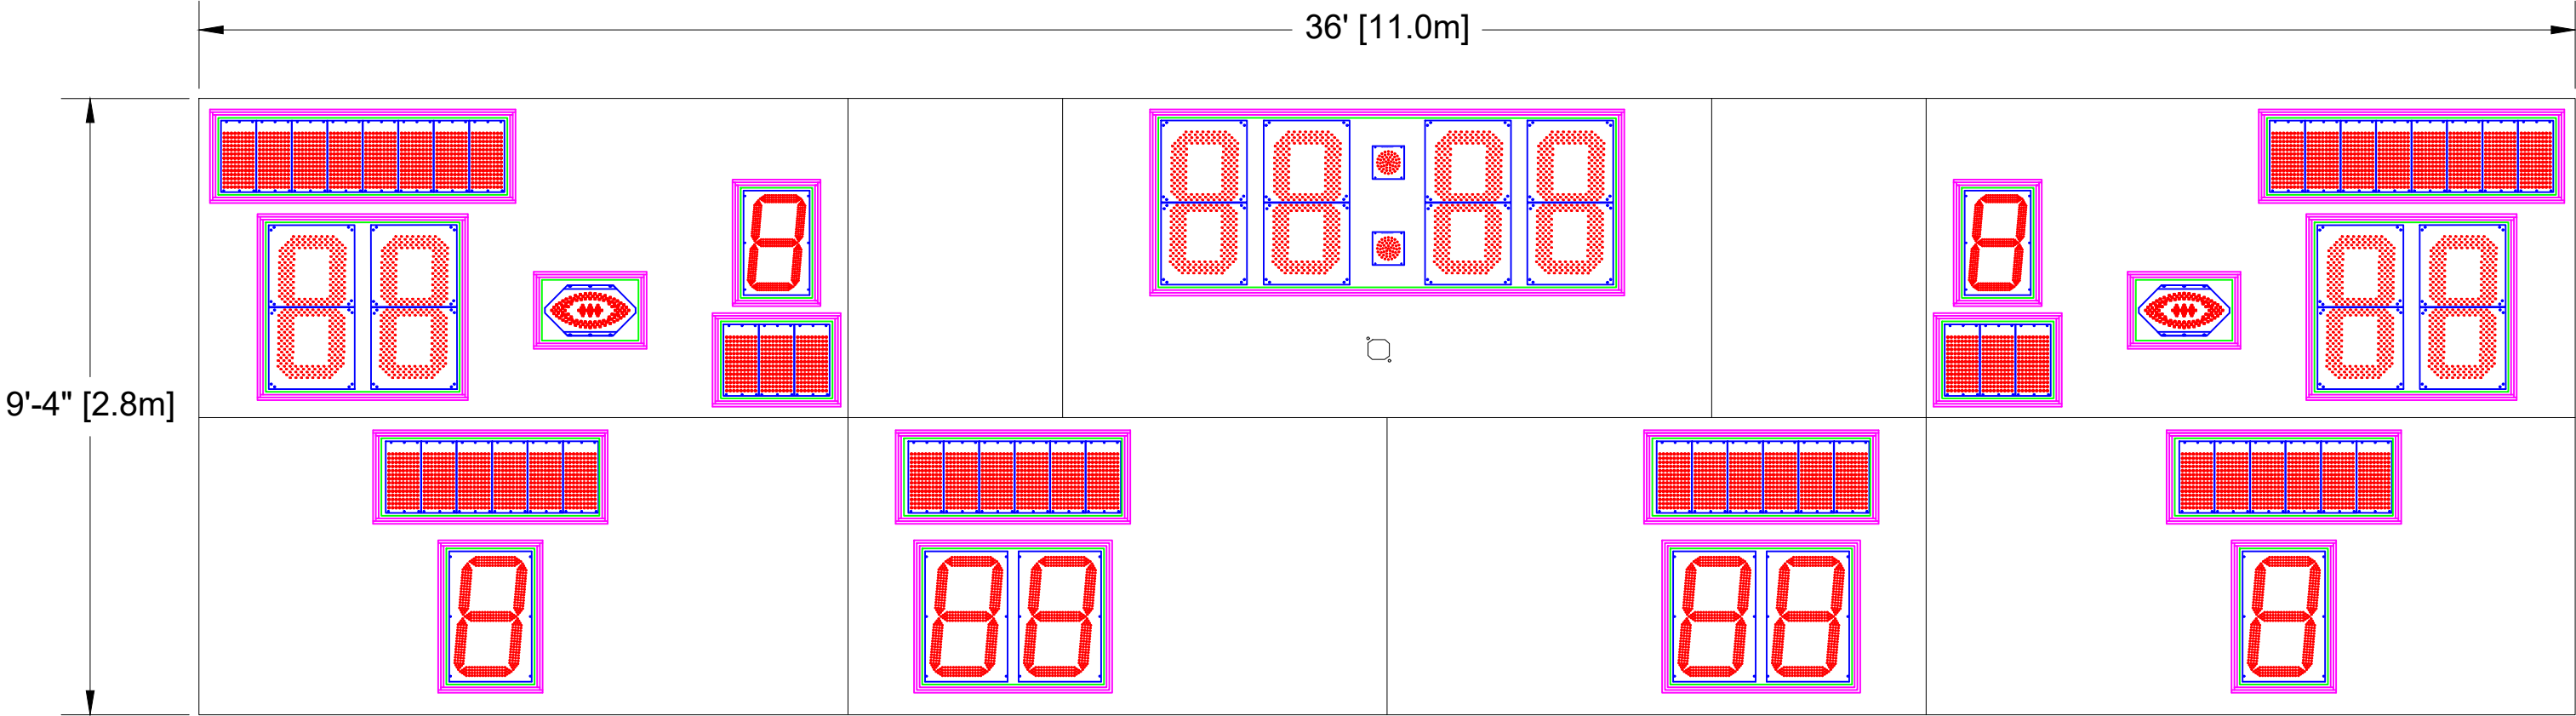

**Scoreboard Specifications**

Overall size: 36' (W) x 9'-4" (H) x 6" (D)  
Approximate Weight: 1562 lbs  
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


30" LED Digits for HOME, GUEST, TOD  
22" LED Digits for DOWN, TO GO, BALL ON, QTR  
17" LED Digits for TOL

10" Electronic Team Names of 8 characters  
10" Electronic Captions of 6 characters  
10" Electronic Captions of 3 characters

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/19/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES ELECTRONIC SCOREBOARDS M8036AUXH	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8036AUXH	12/19/21	A
SCALE		USE FOR REVIEW	
NTS		CGTHOMPSON	
DRAWN BY		PAGE 1 OF 1	



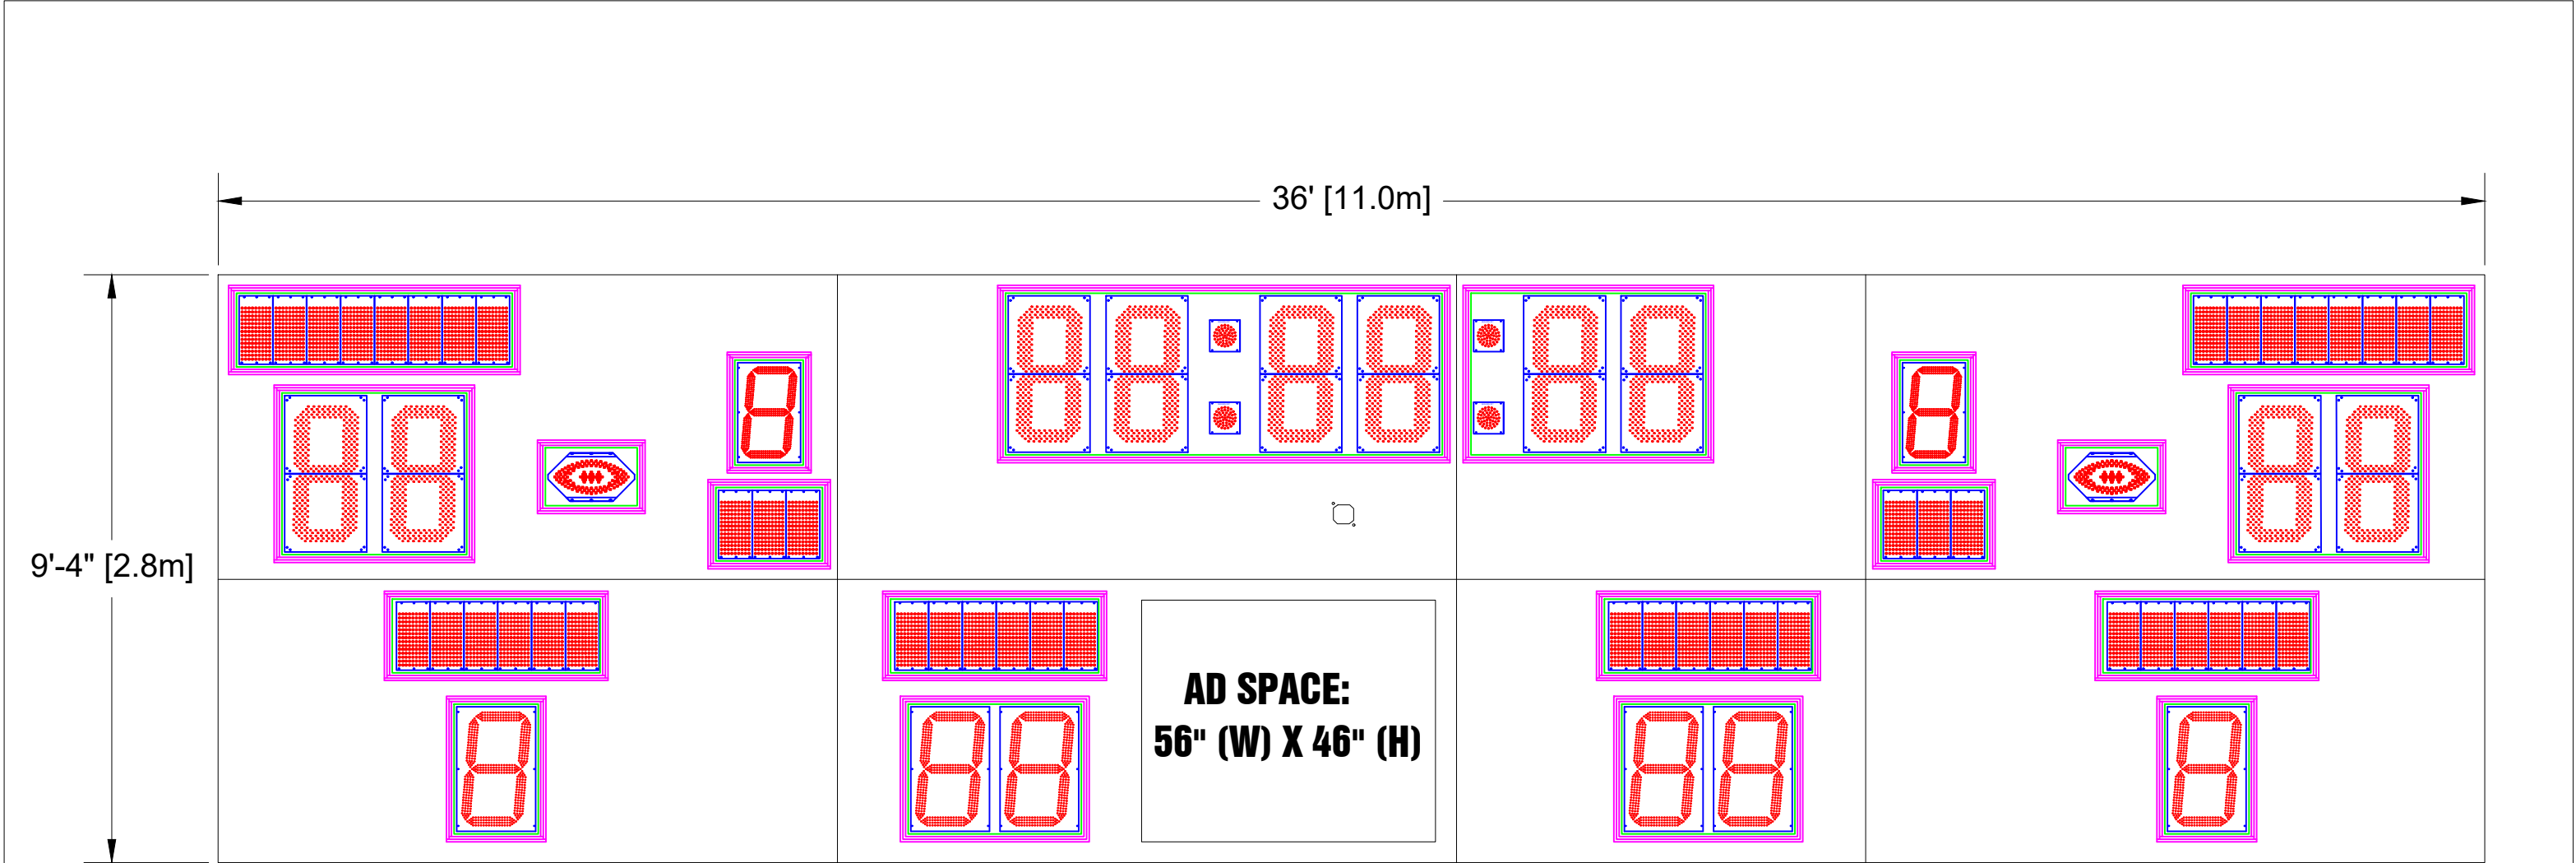

**Scoreboard Specifications**

Overall size: 36' (W) x 9'-4" (H) x 6" (D)  
Approximate Weight: 1595 lbs  
Incoming Mains Power: (3x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD  
22" LED Digits for DOWN, TO GO, BALL ON, QTR  
17" LED Digits for TOL


10" Electronic Team Names of 8 characters  
10" Electronic Captions of 6 characters  
10" Electronic Captions of 3 characters

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:  OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches  Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	

DESCRIPTION <b>OES ELECTRONIC SCOREBOARDS M8036AxCH-H</b>			
SIZE <b>A</b>	FILENAME M8036AUXH-H	INIT DRAWING DATE 12/18/21	REV <b>A</b>
USAGE <b>USE FOR REVIEW</b>			
SCALE <b>NTS</b>	DRAWN BY <b>CGTHOMPSON</b>	PAGE 1 OF 1	

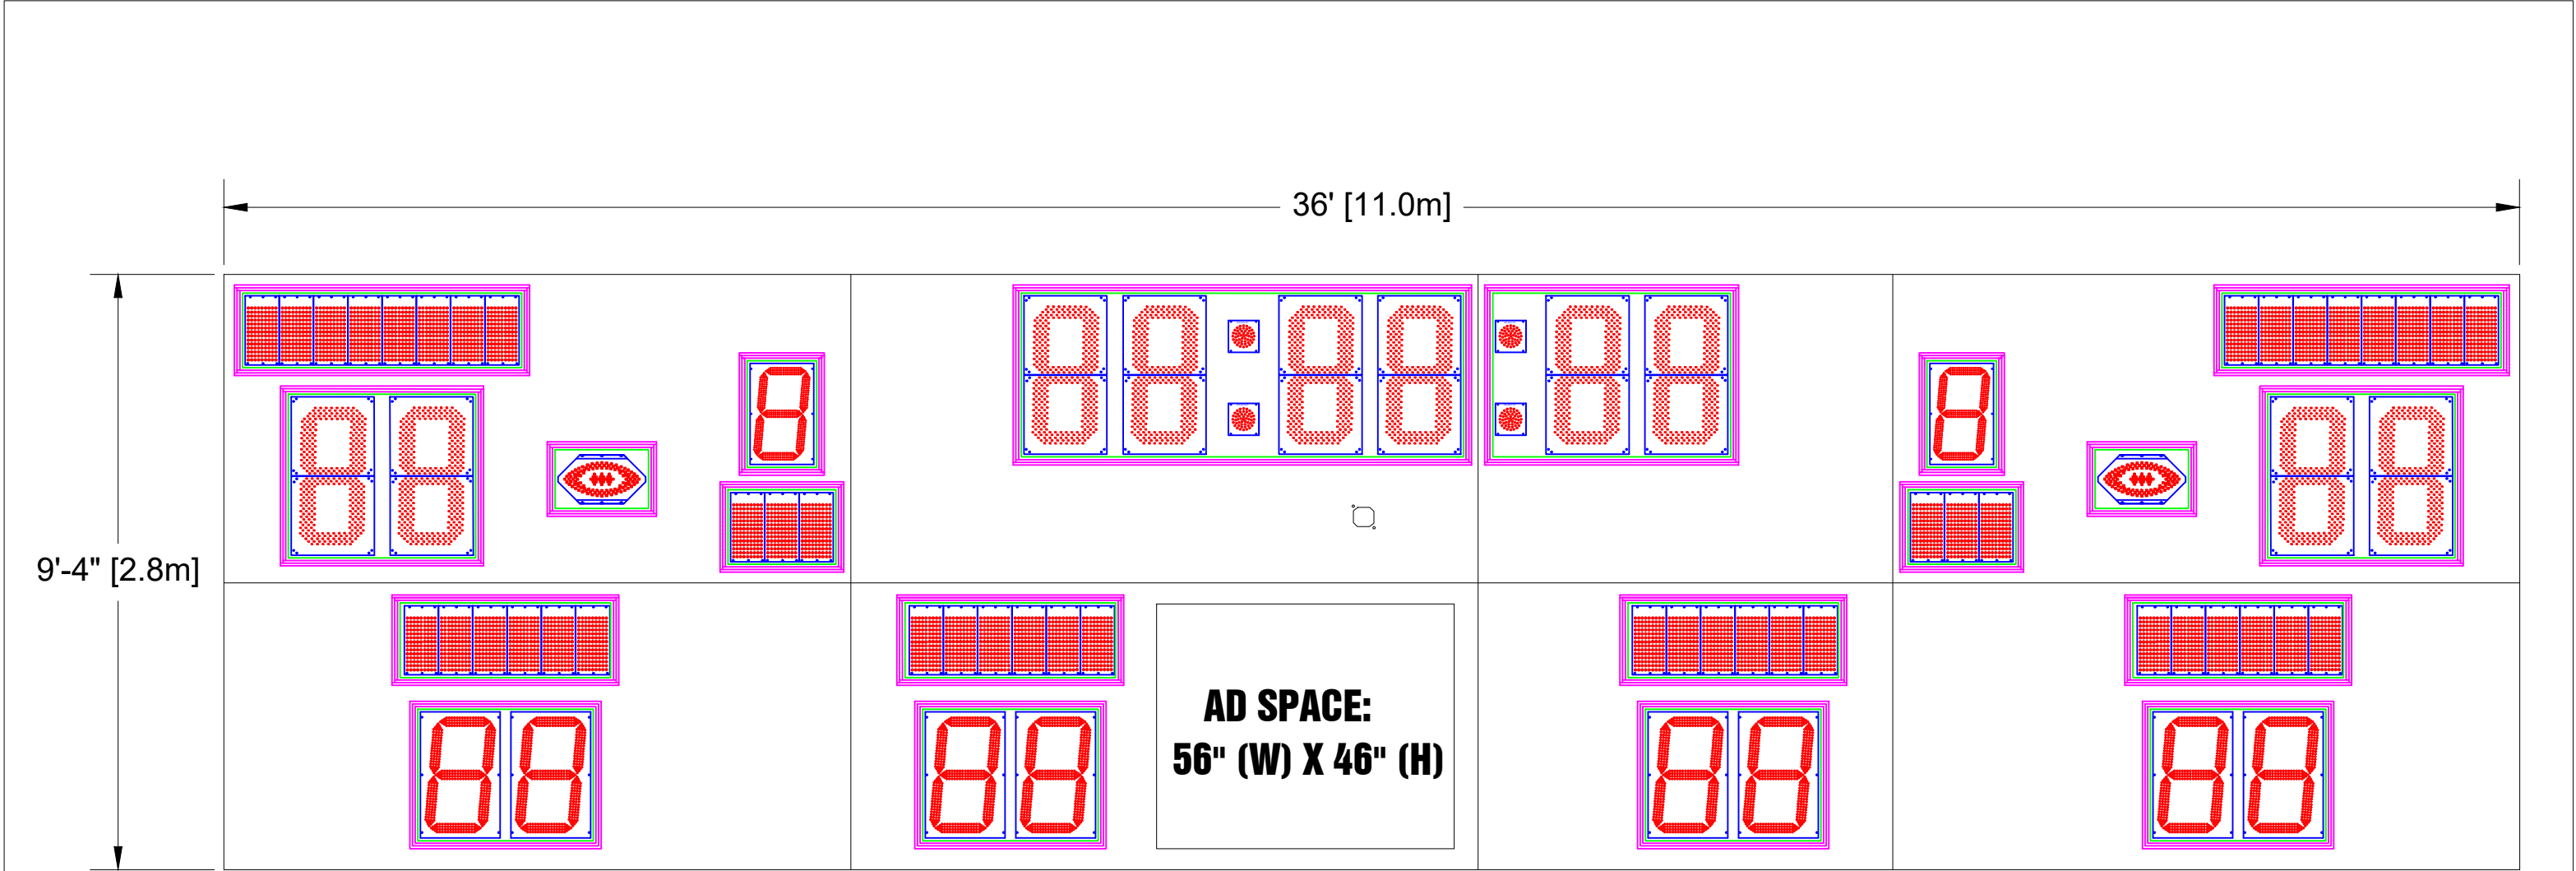

Scoreboard Specifications

Overall size: 36' (W) x 9'-4" (H) x 6" (D)  
Approximate Weight: 1617 lbs  
Incoming Mains Power: (3x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


30" LED Digits for HOME, GUEST, TOD  
22" LED Digits for DOWN, TO GO, BALL ON, QTR  
17" LED Digits for TOL

10" Electronic Team Names of 8 characters  
10" Electronic Captions of 6 characters  
10" Electronic Captions of 3 characters

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021
		<div><div></div><div><div>OES</div><div>SCOREBOARDS</div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:  OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches  Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M8036AxCH-HF</div> <div>SIZE A</div> <div>FILENAME M8036AUXH-HF</div> <div>INIT DRAWING DATE 12/18/21</div> <div>REV A</div>	
<div>THIRD ANGLE PROJECTIONS</div> <div></div>		<div>SCALE NTS</div> <div>DRAWN BY CGTHOMPSON</div> <div>USE FOR REVIEW</div> <div>PAGE 1 OF 1</div>	



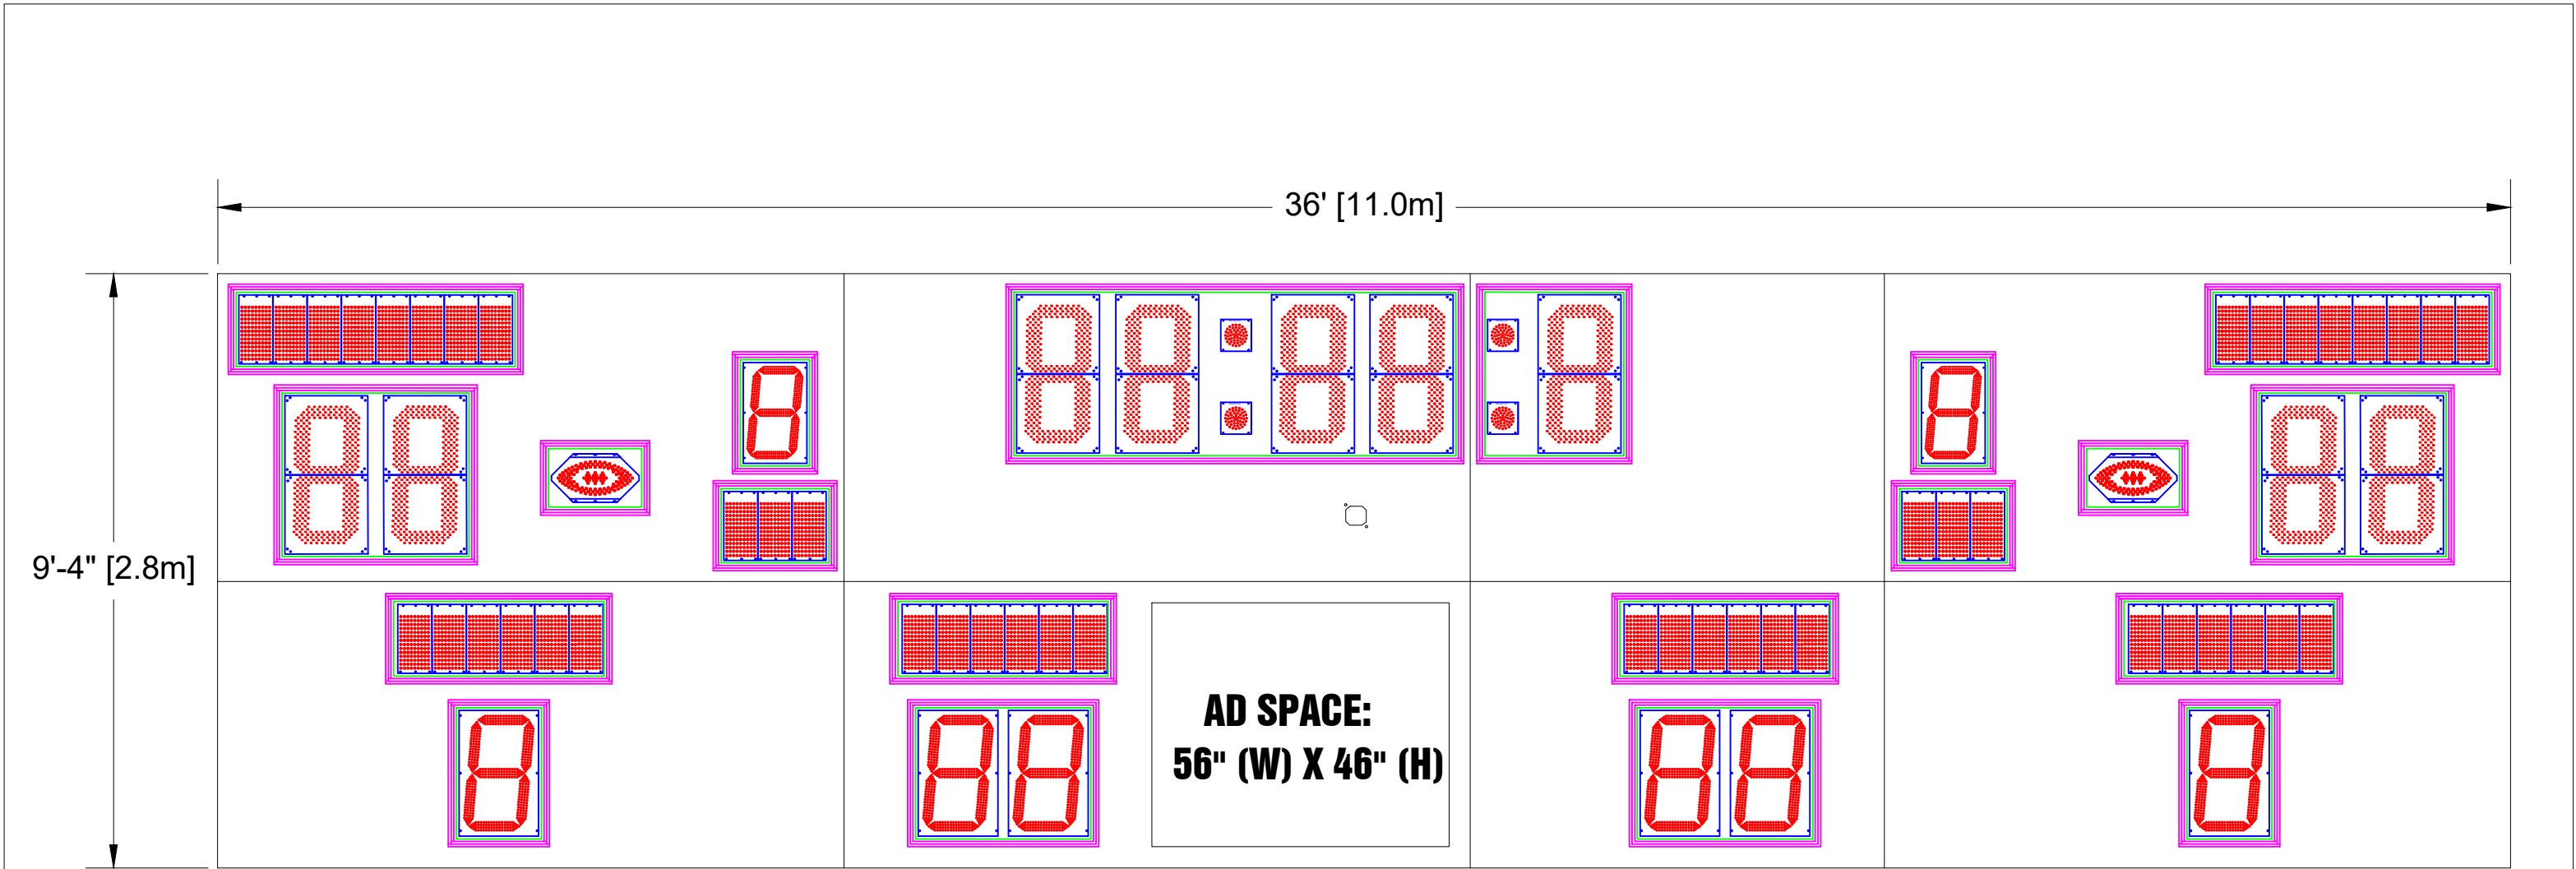

Scoreboard Specifications

Overall size: 36' (W) x 9'-4" (H) x 6" (D)  
Approximate Weight: 1577 lbs  
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


30" LED Digits for HOME, GUEST, TOD  
22" LED Digits for DOWN, TO GO, BALL ON, QTR  
17" LED Digits for TOL

10" Electronic Team Names of 8 characters  
10" Electronic Captions of 6 characters  
10" Electronic Captions of 3 characters

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/21/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES INC. 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
DESCRIPTION		OES ELECTRONIC SCOREBOARDS M8036AxCH-T	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8036AUXH-T	5/21/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1



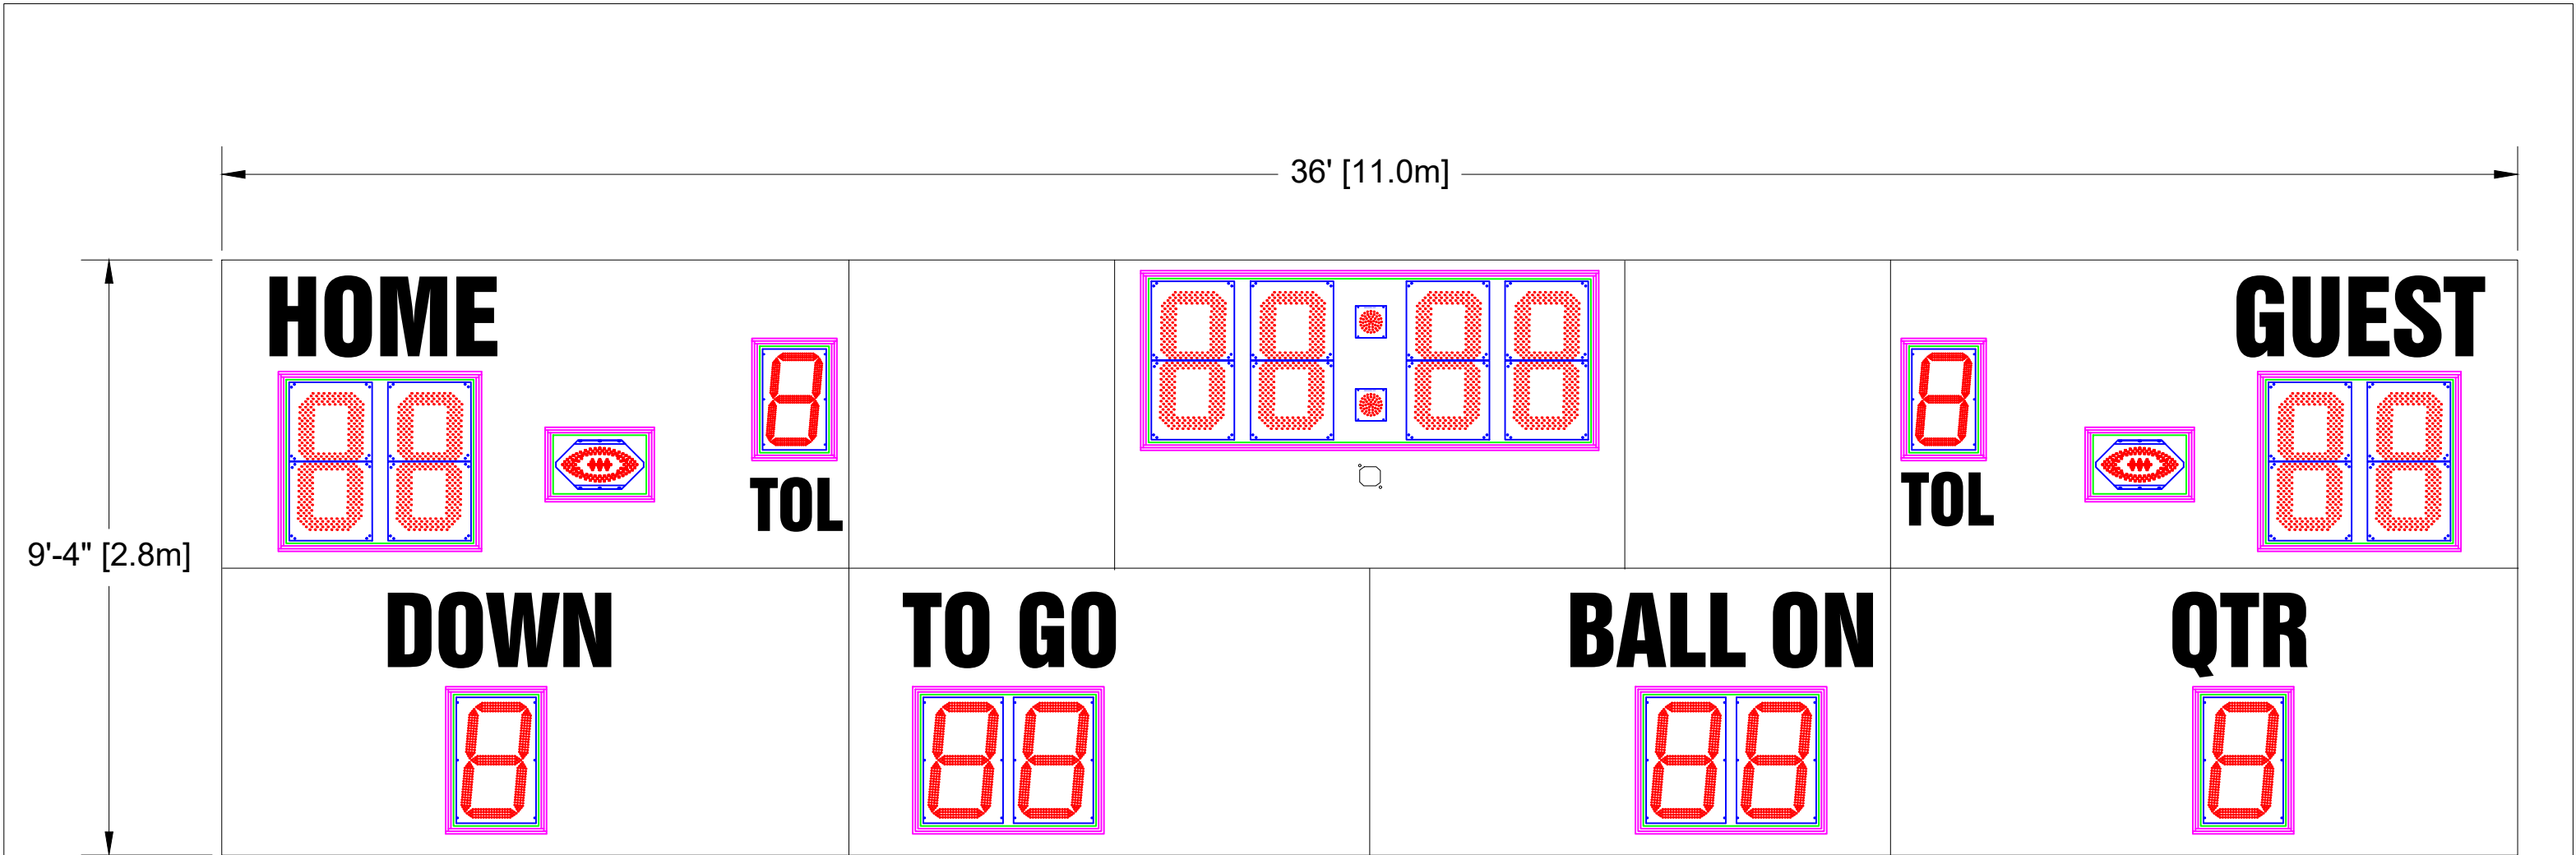

**Scoreboard Specifications**

Overall size: 36' (W) x 9'-4" (H) x 6" (D)  
Approximate Weight: 1364 lbs  
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD  
22" LED Digits for DOWN, TO GO, BALL ON, QTR  
17" LED Digits for TOL

15" White Vinyl Lettering for HOME, GUEST  
14" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR  
10" White Vinyl Lettering for TOL


- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/14/2022

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>	
DESCRIPTION		OES ELECTRONIC SCOREBOARDS M8036AxCV	
SIZE	FILENAME M8036AUXV	INIT DRAWING DATE 3/14/22	REV A
A	USAGE USE FOR REVIEW		
SCALE	NTS	DRAWN BY MLI	PAGE 1 OF 1

4056 Blakie Road,  
London, ON, N6L 1P7  
Tel: (519) 652-5833  
Fax: (519) 652-3795  
Email: oes@oes-inc.com



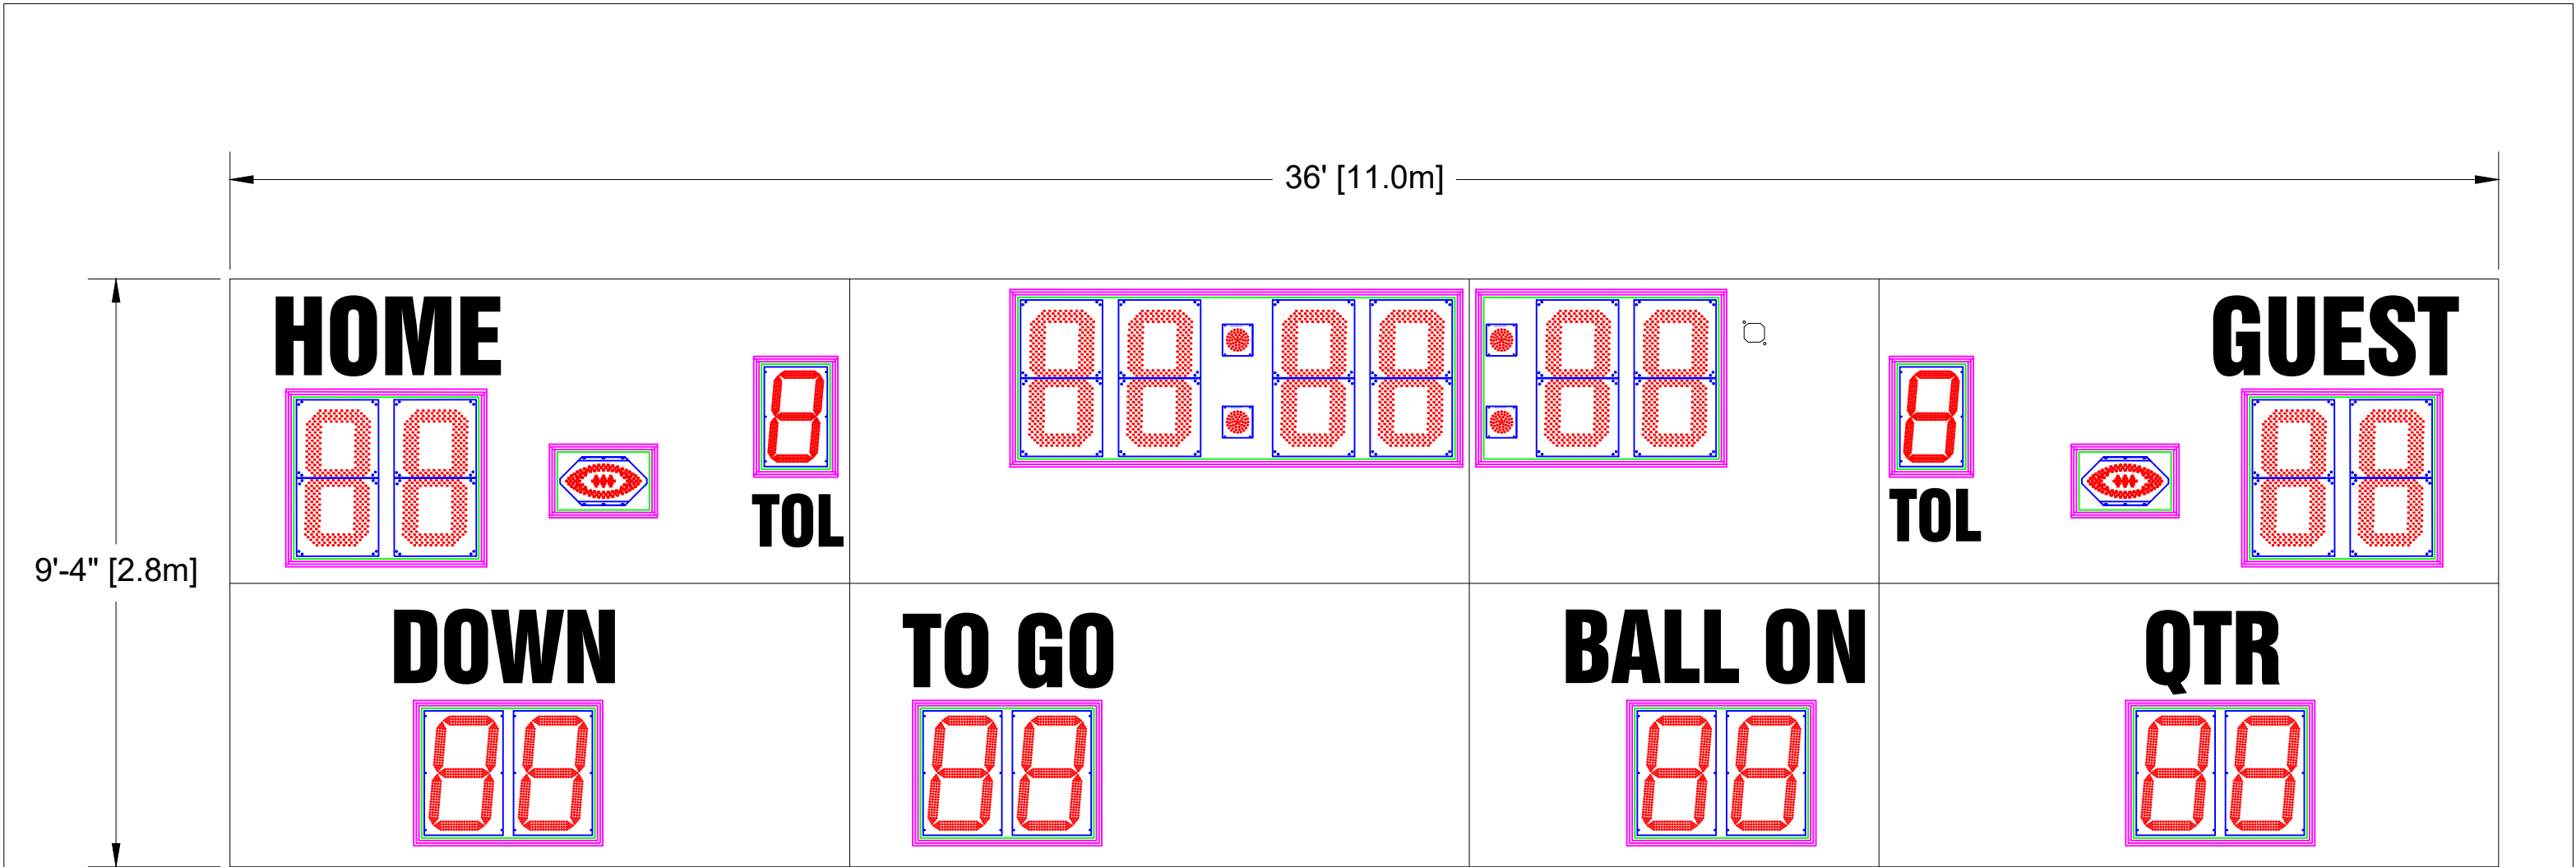

**Scoreboard Specifications**

Overall size: 36' (W) x 9'-4" (H) x 6" (D)  
Approximate Weight: 1420 lbs  
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD  
22" LED Digits for DOWN, TO GO, BALL ON, QTR  
17" LED Digits for TOL

15" White Vinyl Lettering for HOME, GUEST  
14" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR  
10" White Vinyl Lettering for TOL

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle


REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/14/2022

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>		<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M8036AxCV-HF</div> <div>SIZE: A</div> <div>FILENAME: M8036AUXV-HF</div> <div>INIT DRAWING DATE: 3/14/22</div> <div>REVISION: A</div>	
				USE FOR REVIEW	
				SCALE: NTS	DRAWN BY: MLI
		PAGE 1 OF 1			

4056 Blakie Road,  
London, ON, N6L 1P7  
Tel: (519) 652-5833  
Fax: (519) 652-3795  
Email: oes@oes-inc.com





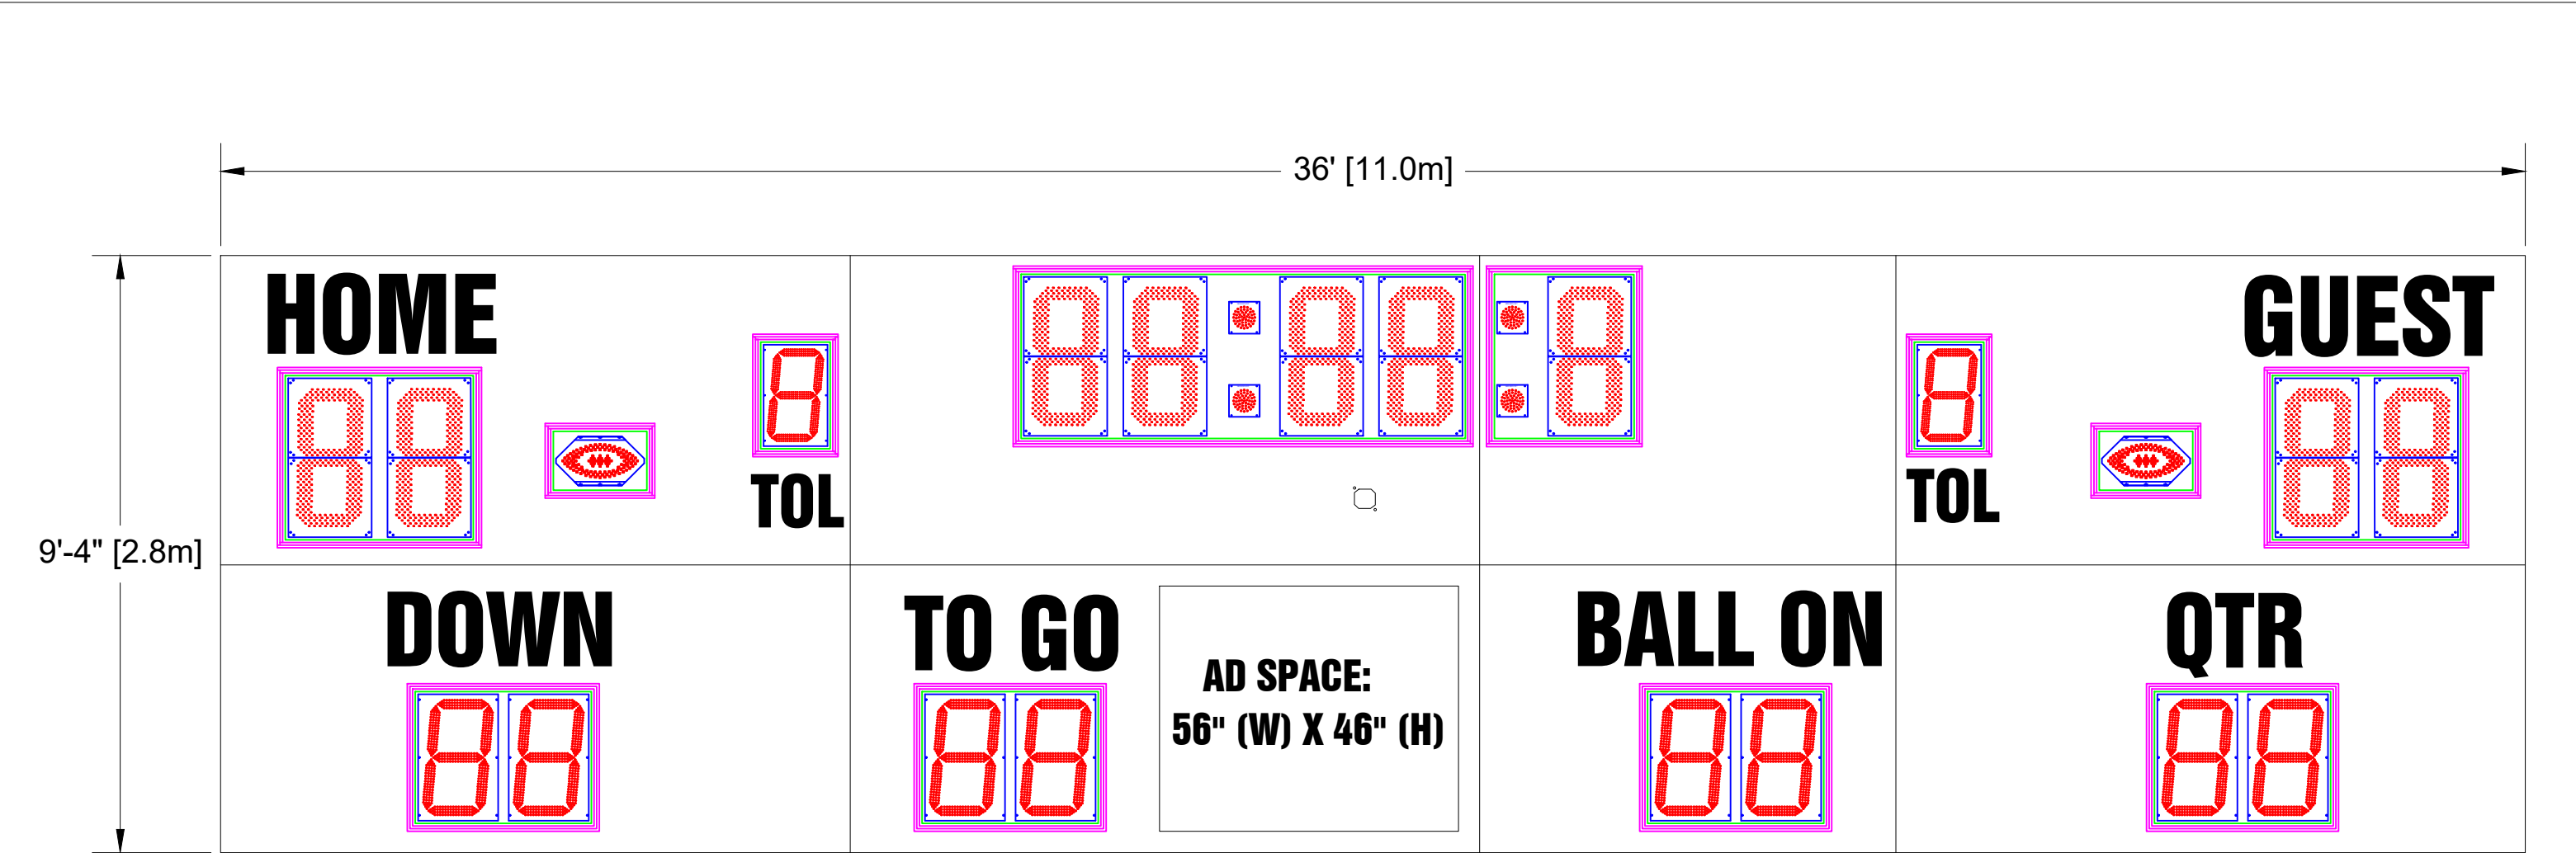

**Scoreboard Specifications**

Overall size: 36' (W) x 9'-4" (H) x 6" (D)  
Approximate Weight: 1405 lbs  
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD  
22" LED Digits for DOWN, TO GO, BALL ON, QTR  
17" LED Digits for TOL

15" White Vinyl Lettering for HOME, GUEST  
14" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR  
10" White Vinyl Lettering for TOL

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/13/2021

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div><div>TOLERANCE INFORMATION</div><div>Dimensions are in Inches</div><div>Fractional ± 1/16"</div><div>Two Place Decimals ± 0.02"</div><div>Three Place Decimals ± 0.005"</div><div>Four Place Decimals ± 0.0005"</div><div>Angular ± 30°</div></div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>	
<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS</div> <div>M8036AxCV-TF</div>		<div>4056 Blakie Road,</div> <div>London, ON, N6L 1P7</div> <div>Tel: (519) 652-5833</div> <div>Fax: (519) 652-3795</div> <div>Email: oes@oes-inc.com</div>	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8036AUXV-TF	5/13/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE 1 OF 1