

Scoreboard Specifications

Overall size: 32' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1452 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

10" Electronic Team Names of 8 characters

14" White Vinyl Lettering for DOWN, TO GO, BALL, ON, QTR
10" White Vinyl Lettering for TOL

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

| REVISION | DESCRIPTION | AUTHOR | DATE |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------------------------------------------------------------------------------------------------------------|-----------|
| A | INITIAL DESIGN | OES | 3/17/2020 |
| NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC. | | 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com | |
| TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30° | | THIRD ANGLE PROJECTIONS | |
| SIZE | FILENAME | INIT DRAWING DATE | REV |
| A | M8032AUXE-TF | 3/17/20 | A |
| USAGE | | USE FOR REVIEW | |
| SCALE | NTS | DRAWN BY | PAGE |
| | | CGTHOMPSON | 1 OF 1 |

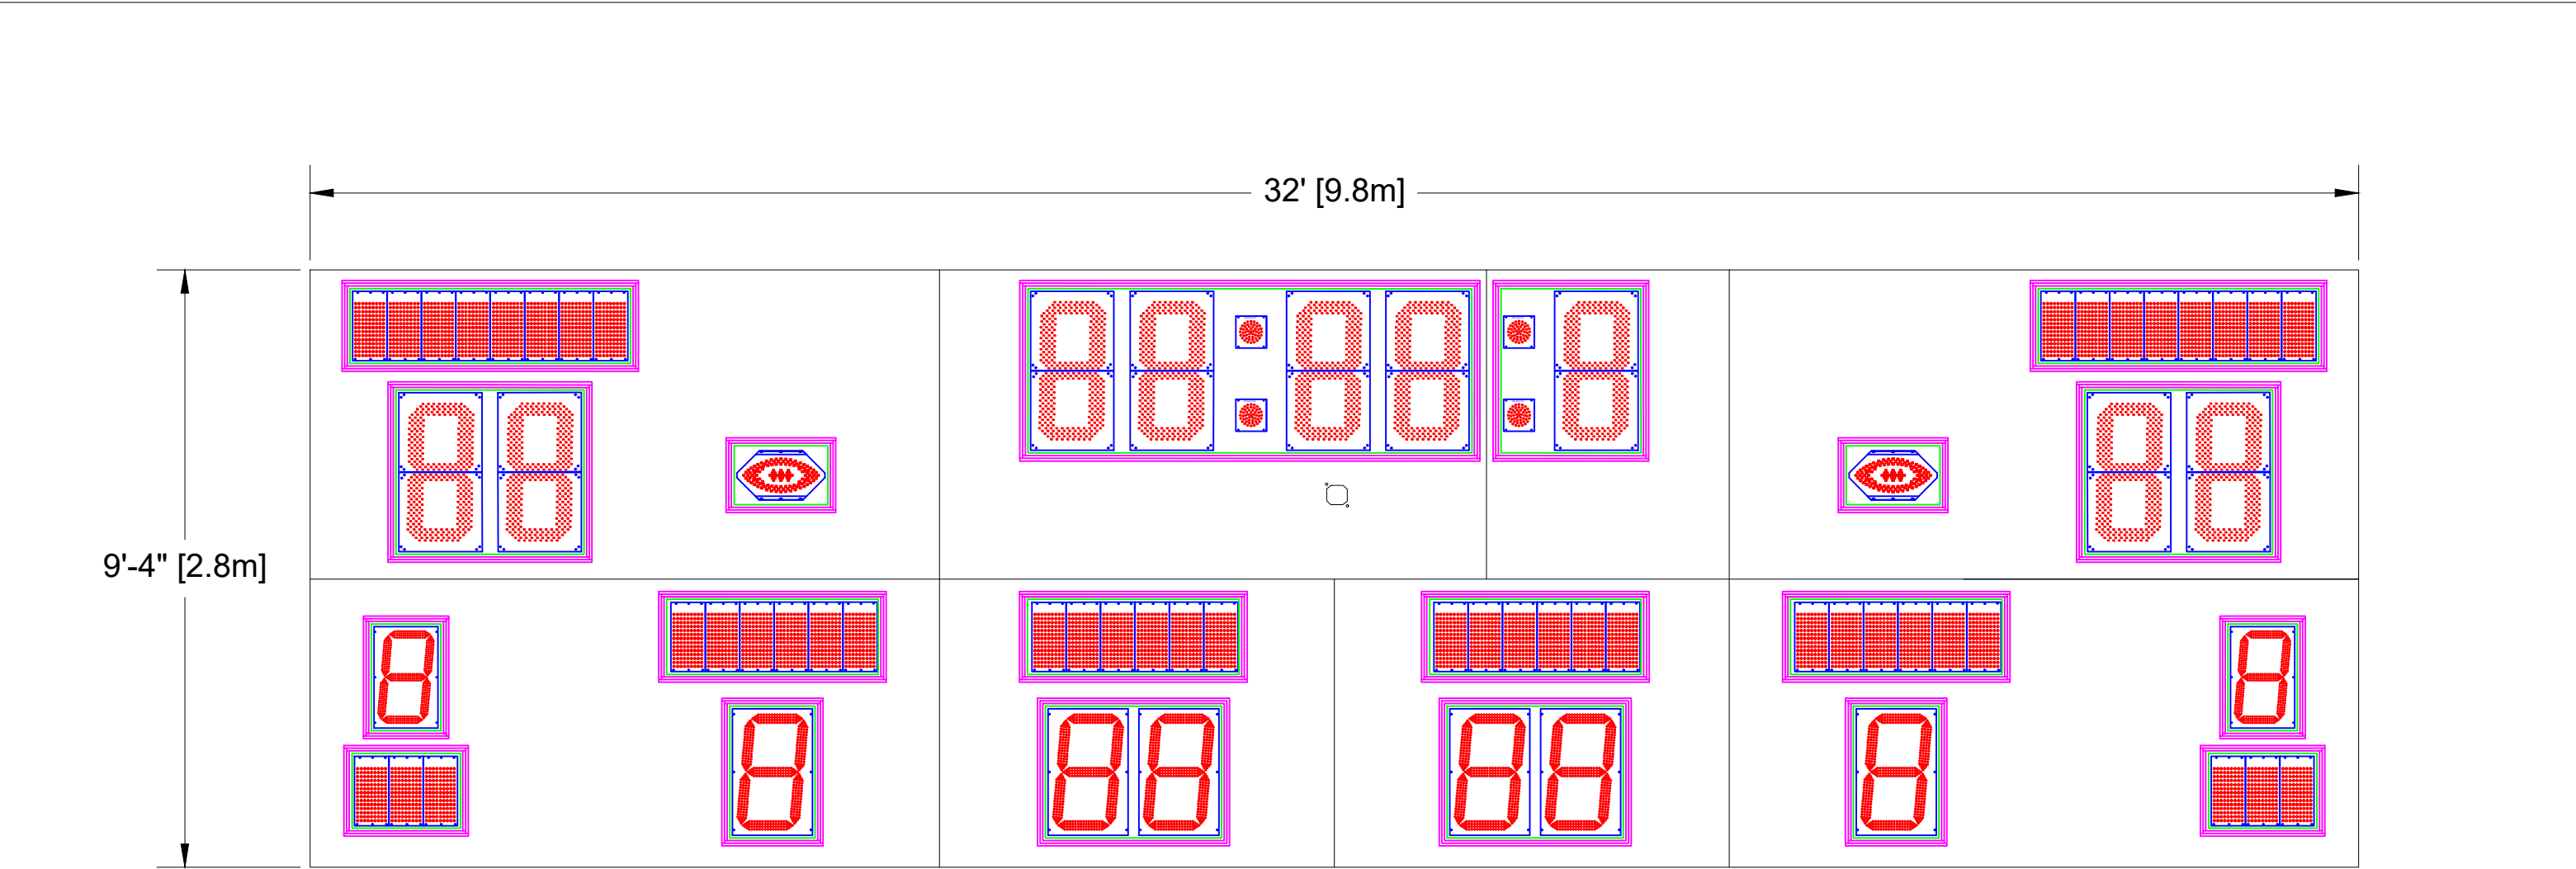

Scoreboard Specifications


Overall size: 32' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1497 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit.

30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

10" Electronic Team Names of 8 characters
10" Electronic Captions of 6 characters
10" Electronic Captions of 3 characters

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

| REVISION | DESCRIPTION | AUTHOR | DATE |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| A | INITIAL DESIGN | OES | 12/10/2021 |
| | | | |
| | | <div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div> | |
| <div><div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div><div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div><div><div>TOLERANCE INFORMATION</div><div>Dimensions are in Inches</div><div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div></div></div> | | <div><div>THIRD ANGLE PROJECTIONS</div><div></div></div> | |
| | | <div><div>DESCRIPTION</div><div>OES ELECTRONIC SCOREBOARDS M8032AxCH-T</div></div> | |
| <div><div>SIZE</div><div>A</div></div> | | <div><div>FILENAME</div><div>M8032AUXH-T</div></div> | <div><div>INIT DRAWING DATE</div><div>12/10/21</div></div> |
| | | <div><div>USAGE</div><div>USE FOR REVIEW</div></div> | |
| | | <div><div>SCALE</div><div>NTS</div></div> | <div><div>DRAWN BY</div><div>CGTHOMPSON</div></div> |
| | | <div><div>PAGE</div><div>1 OF 1</div></div> | |

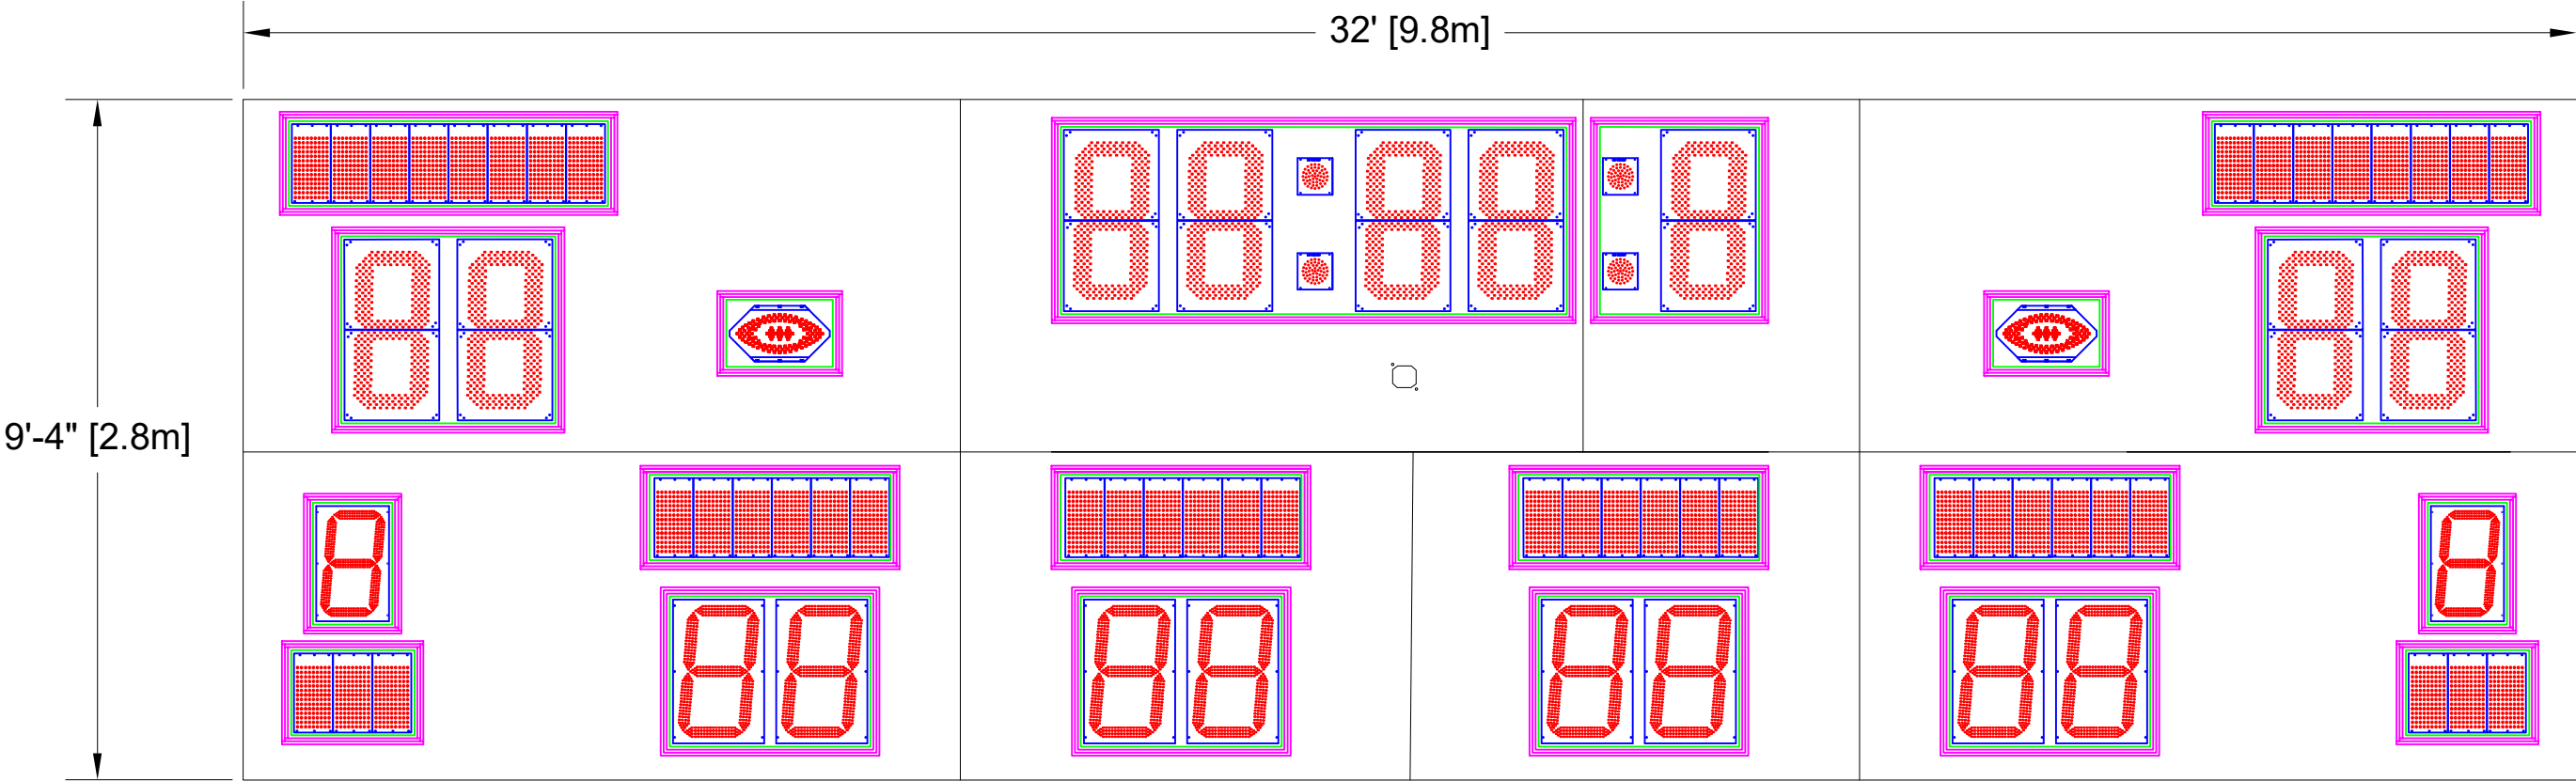



Scoreboard Specifications


Overall size: 32' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1521 lbs
Incoming Mains Power: (3x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

10" Electronic Team Names of 8 characters
10" Electronic Captions of 6 characters
10" Electronic Captions of 3 characters

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

| REVISION | DESCRIPTION | AUTHOR | DATE |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| A | INITIAL DESIGN | OES | 3/17/2020 |
| | | | |
| | |  <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div> | |
| NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC. | | DESCRIPTION OES ELECTRONIC SCOREBOARDS M8032AxCH-TF | |
| TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30° | | SIZE A | INIT DRAWING DATE 3/17/20 |
| THIRD ANGLE PROJECTIONS  | | FILENAME M8032AUXH-TF | REV A |
| | | USAGE USE FOR REVIEW | |
| SCALE NTS | | DRAWN BY CGTHOMPSON | PAGE 1 OF 1 |

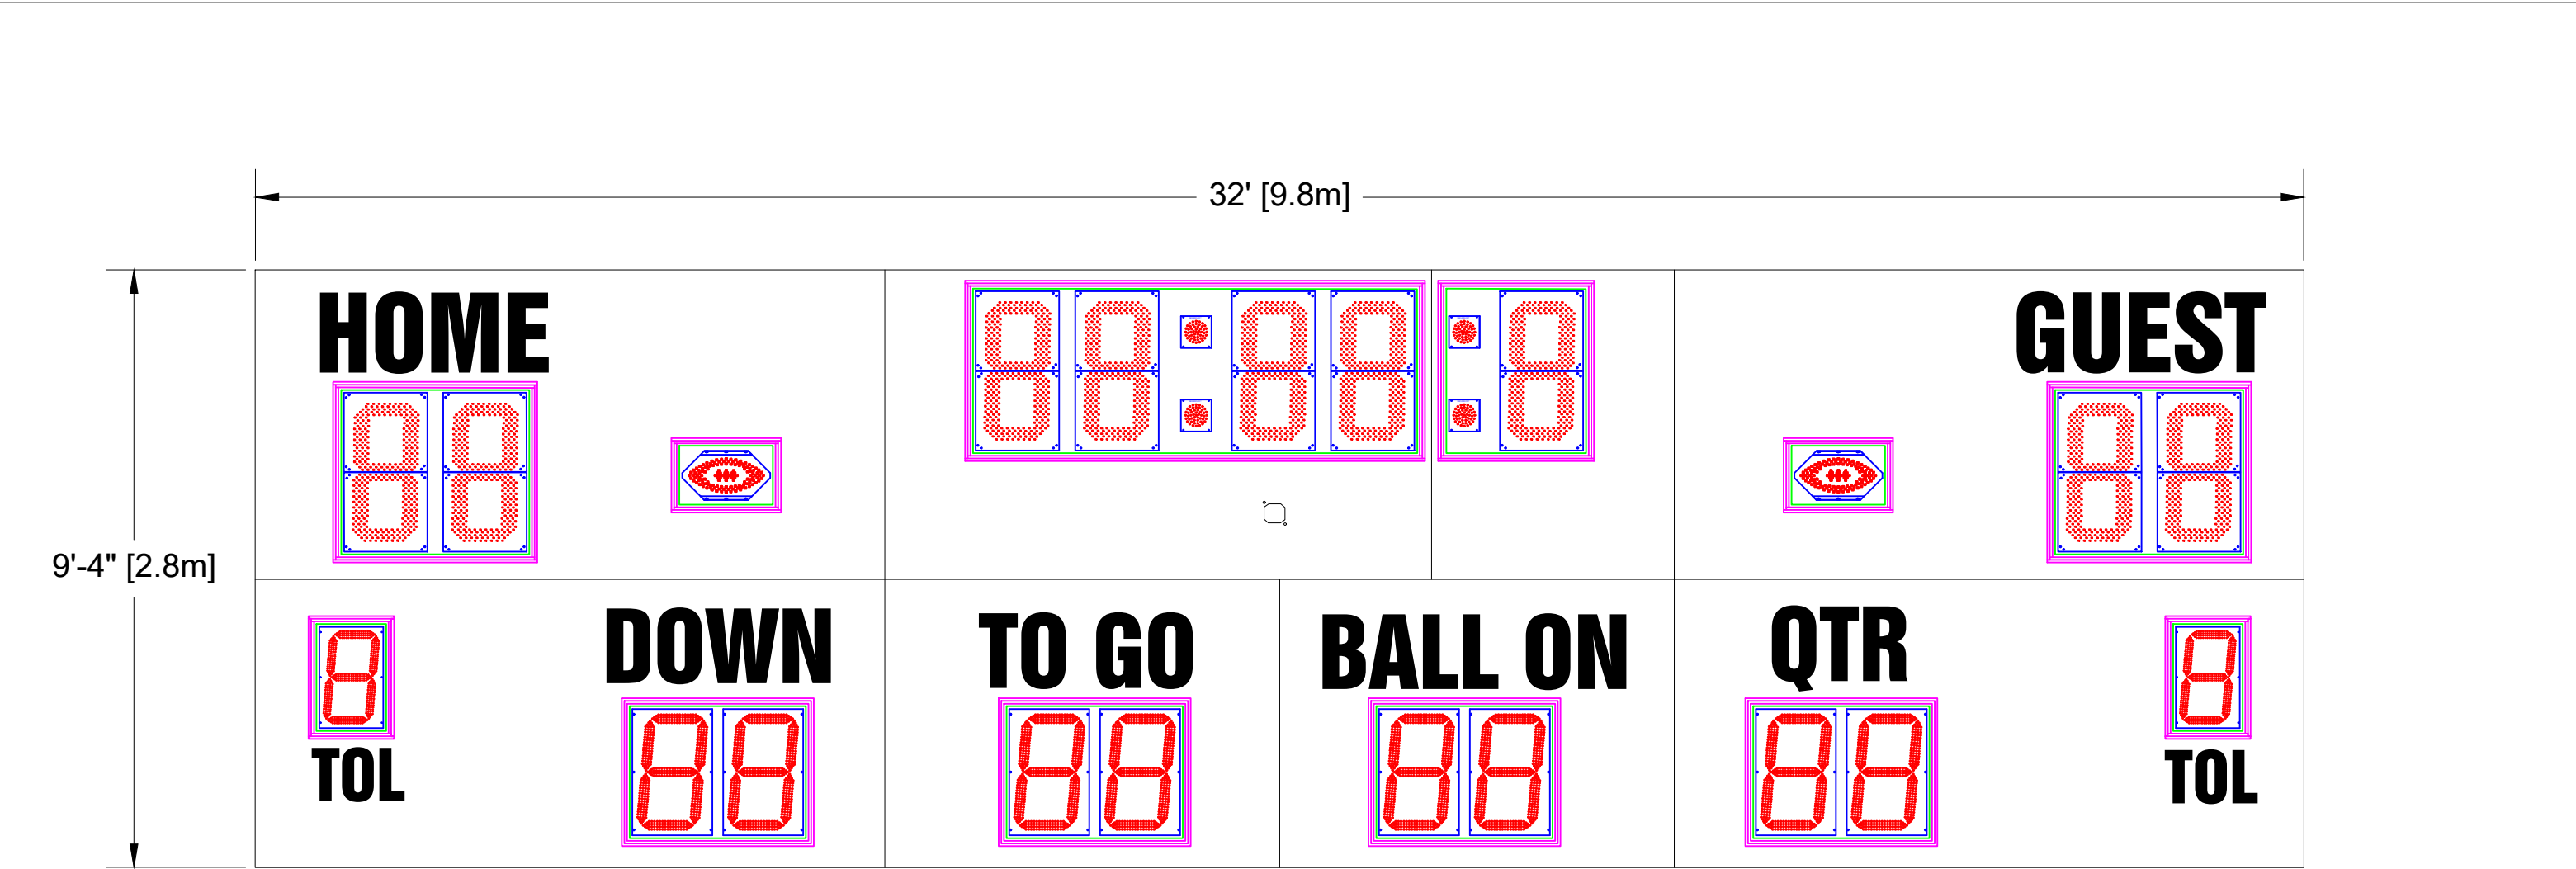

Scoreboard Specifications

Overall size: 32' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1403 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

15" White Vinyl Lettering for HOME, GUEST
14" White Vinyl Lettering for DOWN, TO GO, BALL, ON, QTR
10" White Vinyl Lettering for TOL

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

| REVISION | DESCRIPTION | AUTHOR | DATE |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------------------------------------------------------------------------------------------------------------|------------------------------|
| A | INITIAL DESIGN | OES | 5/21/2021 |
| NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: | | | |
| OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC. | | 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com | |
| TOLERANCE INFORMATION Dimensions are in Inches | | THIRD ANGLE PROJECTIONS | |
| Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30' | | DESCRIPTION OES ELECTRONIC SCOREBOARDS M8032AxCV-TF | |
| SIZE A | | FILENAME M8032AUXV-TF | INIT DRAWING DATE 5/21/21 |
| | | USAGE USE FOR REVIEW | |
| SCALE NTS | | DRAWN BY CGTHOMPSON | PAGE 1 OF 1 |