

Scoreboard Specifications
Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1058 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.


22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR, TOD
17" LED Digits for TOL

10" Electronic Team names at 8 Ch

13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/17/2020
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8025AxCE-HF		SIZE A	INIT DRAWING DATE 3/17/20
USAGE USE FOR REVIEW		SCALE NTS	REV A
DRAWN BY CGTHOMPSON		PAGE 1 OF 1	

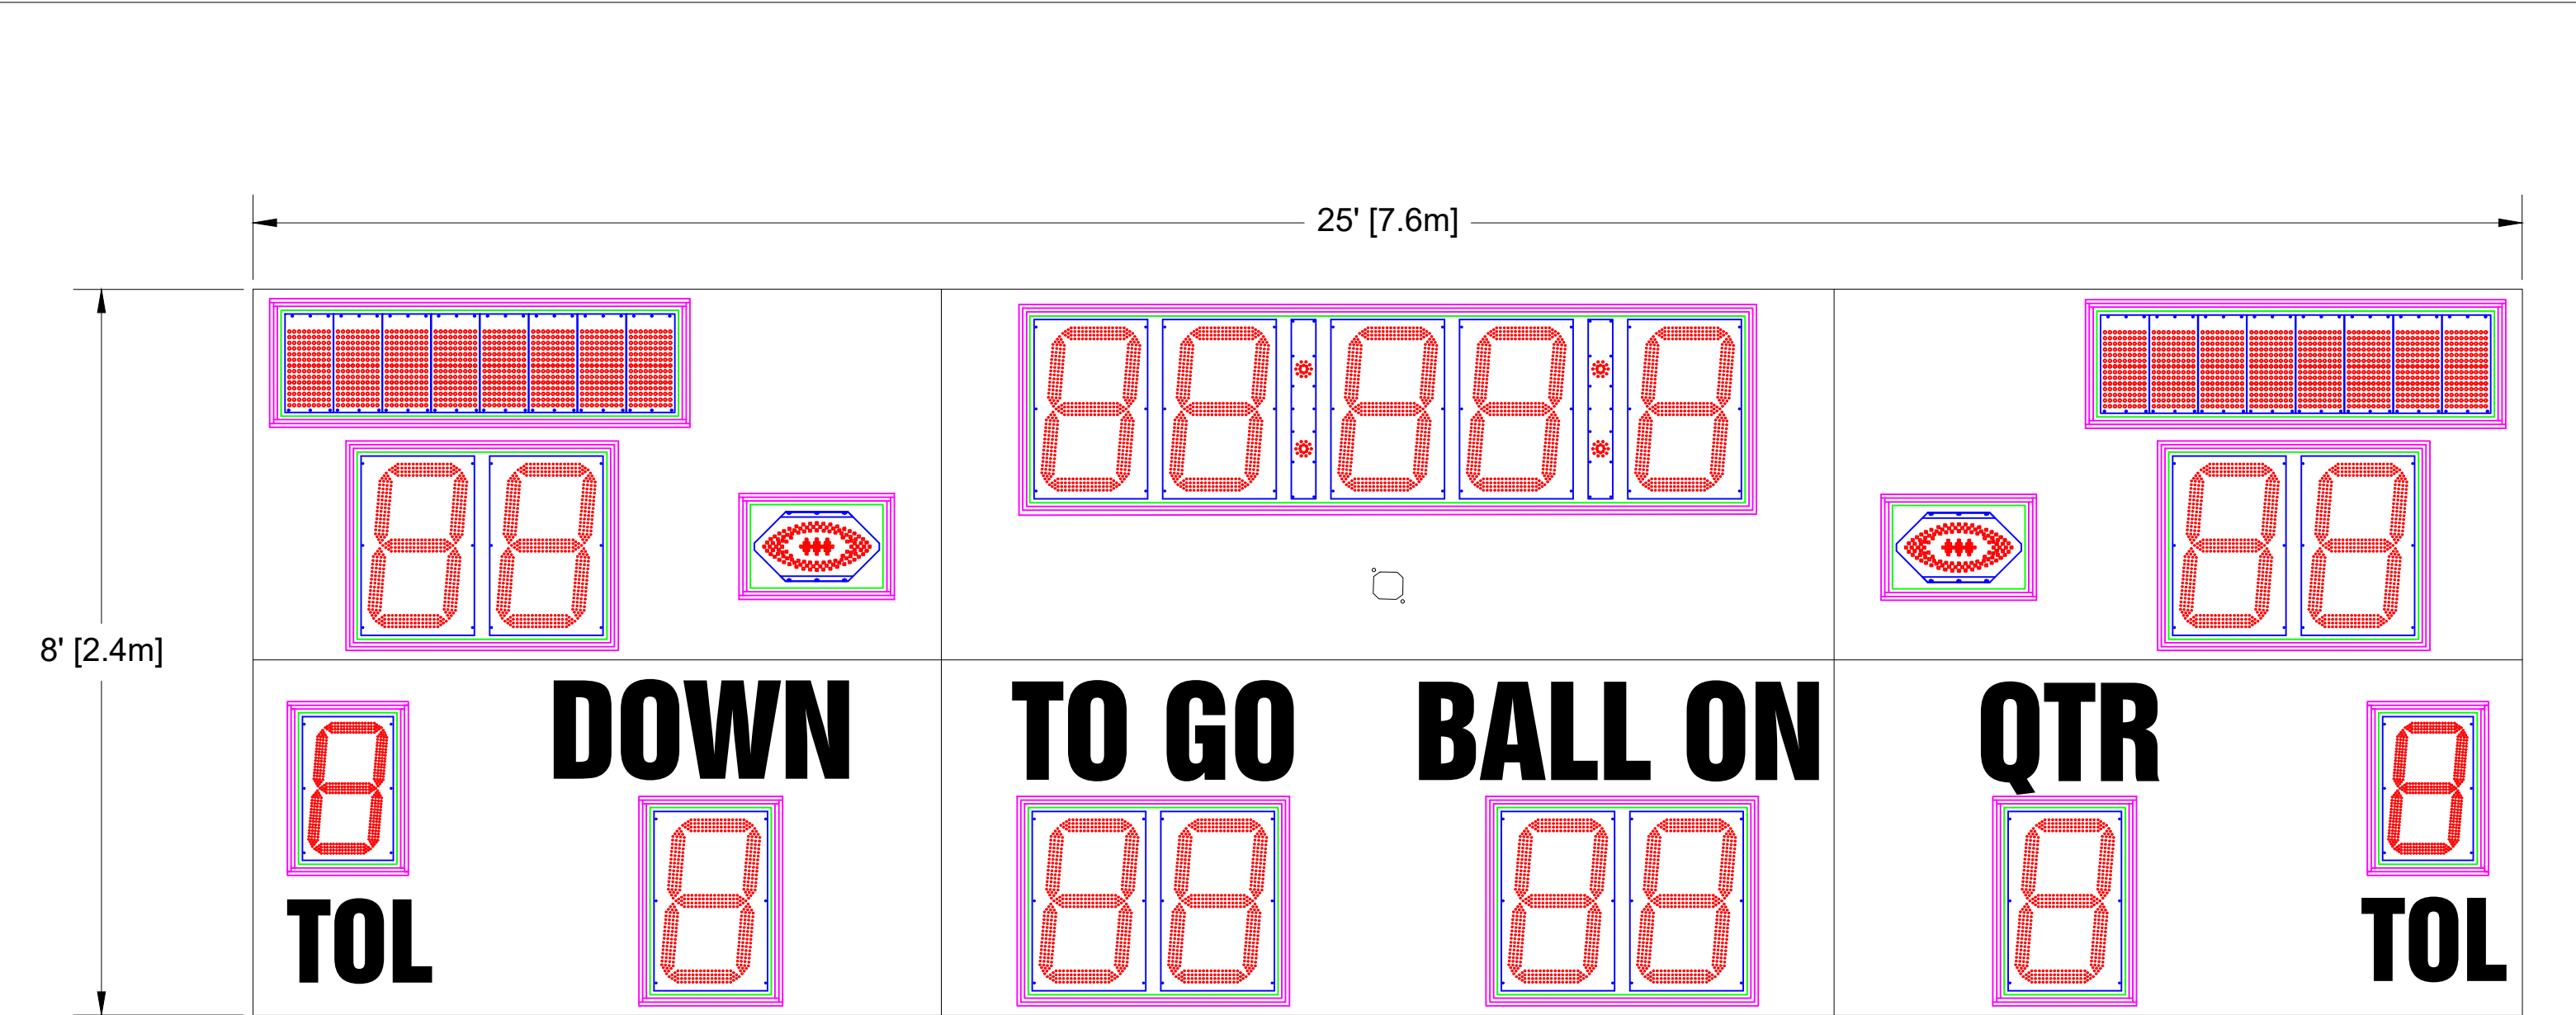

Scoreboard Specifications
Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1025 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.


22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR, TOD
17" LED Digits for TOL


10" Electronic Team names at 8 Ch

13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

- This Layout is for internal reference only.
All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/5/2021

<p>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</p> <p>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</p>		 <p>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</p>	
<p>DESCRIPTION</p> <p>OES ELECTRONIC SCOREBOARDS M8025AxCE-T</p>			
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8025AUXE-T	5/5/21	A
<p>USAGE</p> <p>USE FOR REVIEW</p>			
SCALE	NTS	DRAWN BY	PAGE 1 OF 1

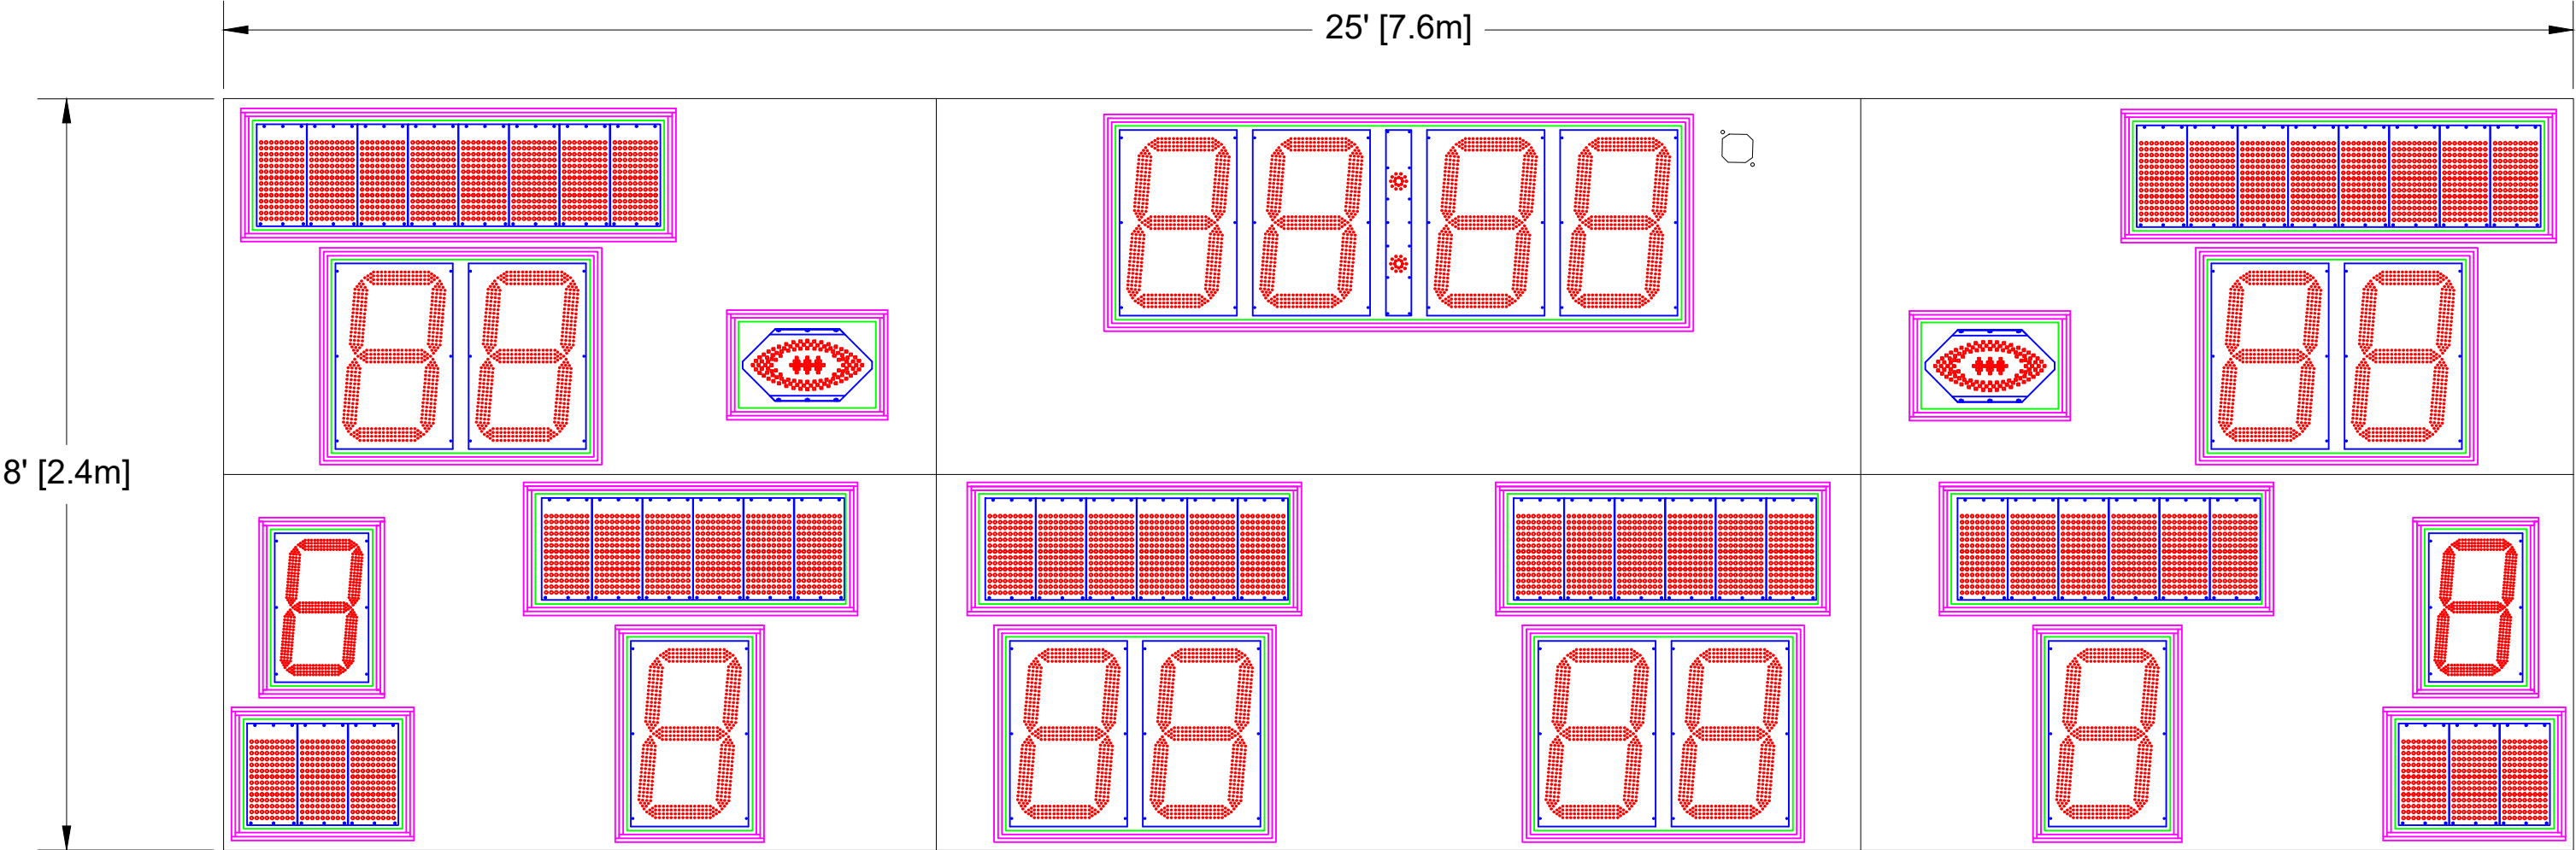



Scoreboard Specifications
Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1098 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the BALL ON Digit.

- 22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR, TOD
- 17" LED Digits for TOL
- 10" Electronic Team names at 8 Ch
- 10" Electronic Captions at 6 Ch
- 10" Electronic Captions at 3 Ch

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/5/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
SIZE A	FILENAME M8025AUXH USAGE	INIT DRAWING DATE 5/5/21	REV A
OES ELECTRONIC SCOREBOARDS M8025AxCH			
USE FOR REVIEW			
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	

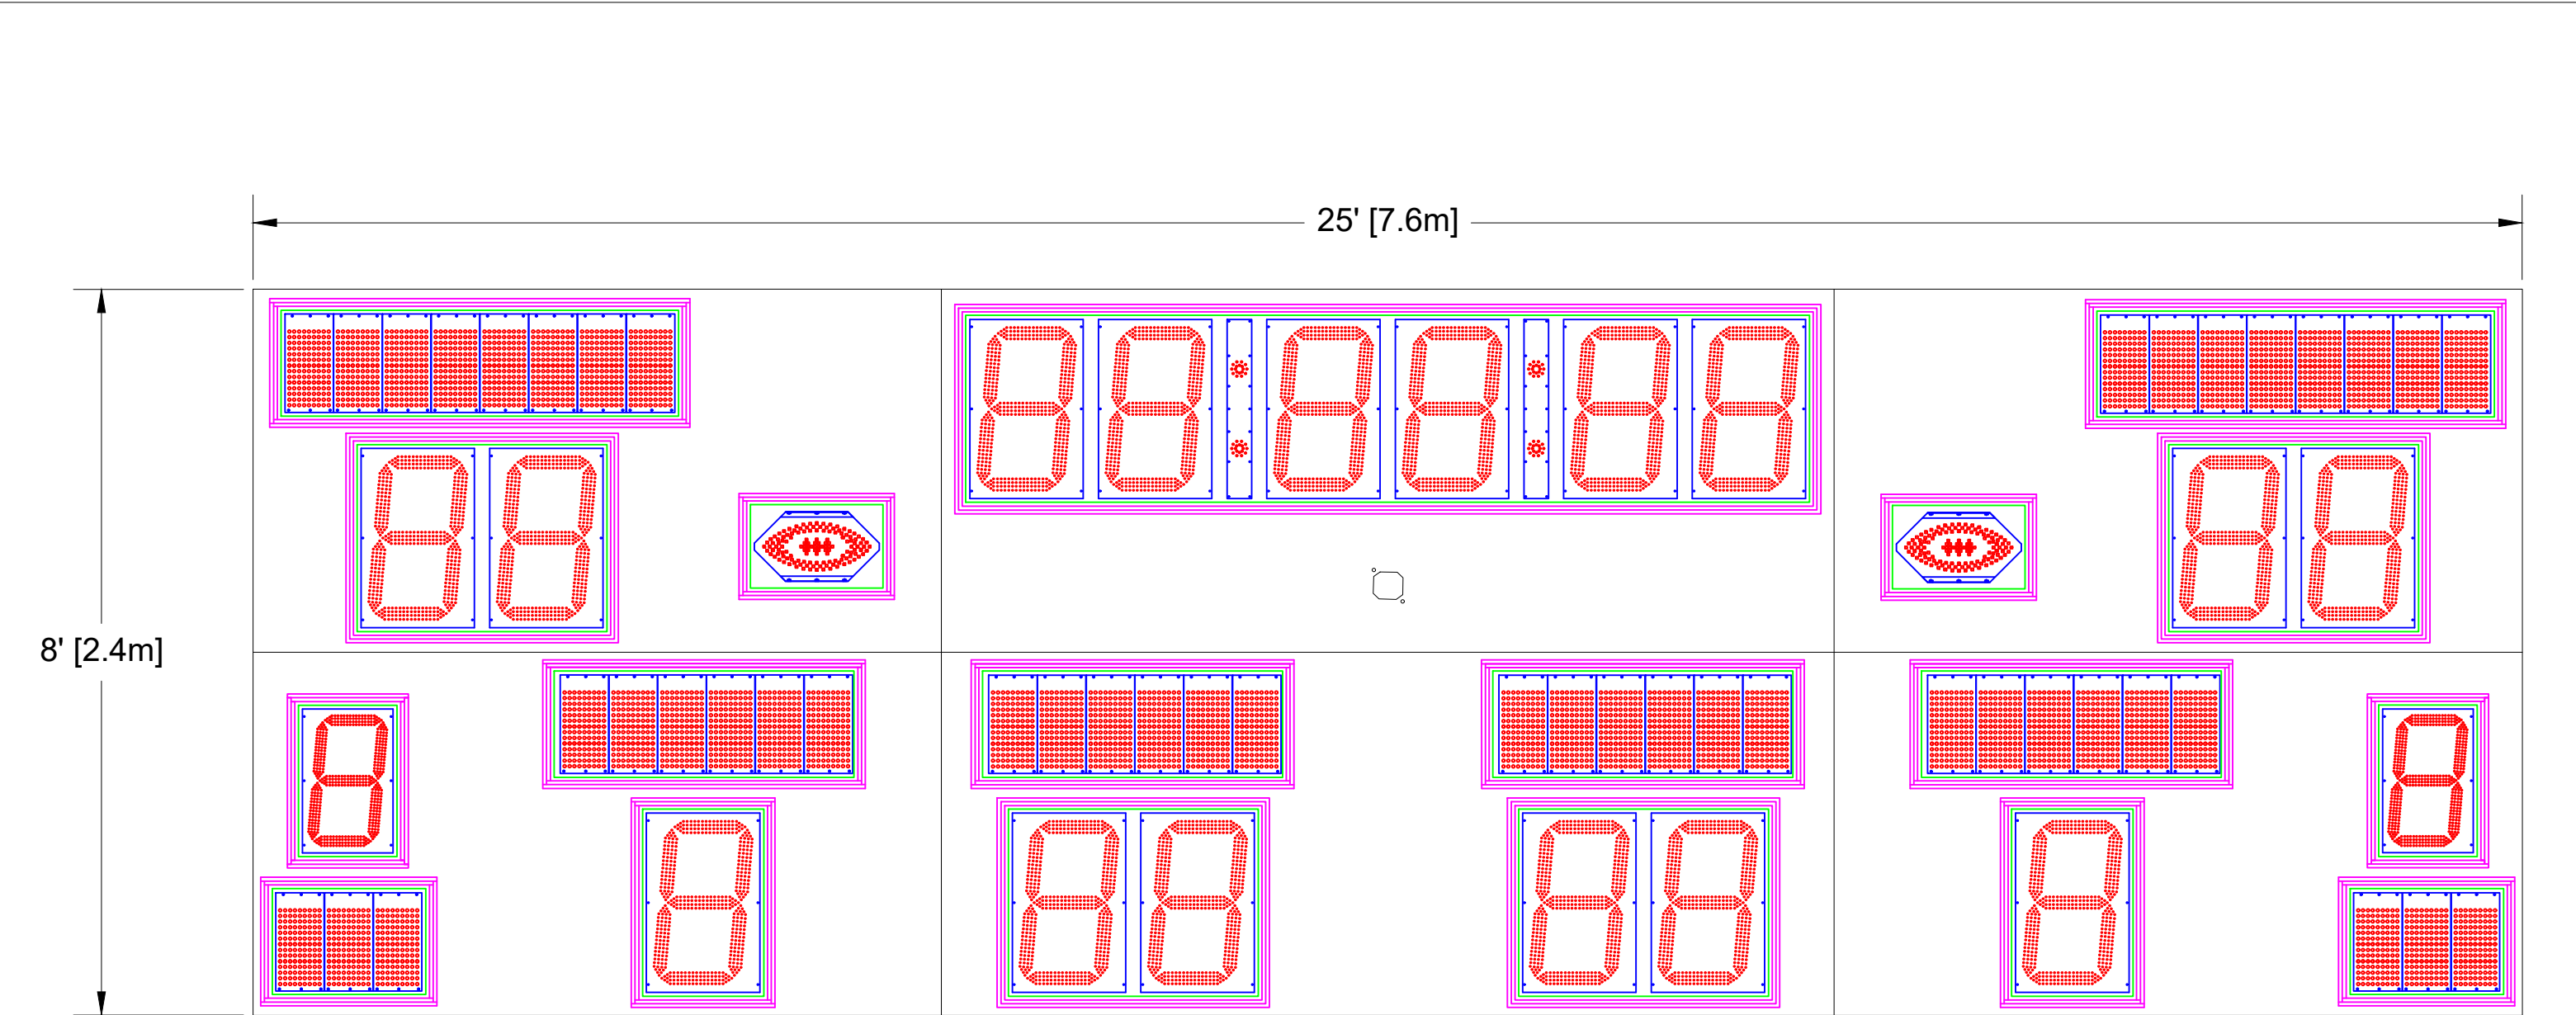

Scoreboard Specifications
Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1120 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.

- 22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR, TOD
- 17" LED Digits for TOL
- 10" Electronic Team names at 8 Ch
- 10" Electronic Captions at 6 Ch
- 10" Electronic Captions at 3 Ch

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/5/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.


TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M8025AxCH-H			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M8025AUXH-H	5/5/21	A
USAGE			
USE FOR REVIEW			
SCALE	NTS	DRAWN BY	PAGE
		CGTHOMPSON	1 OF 1

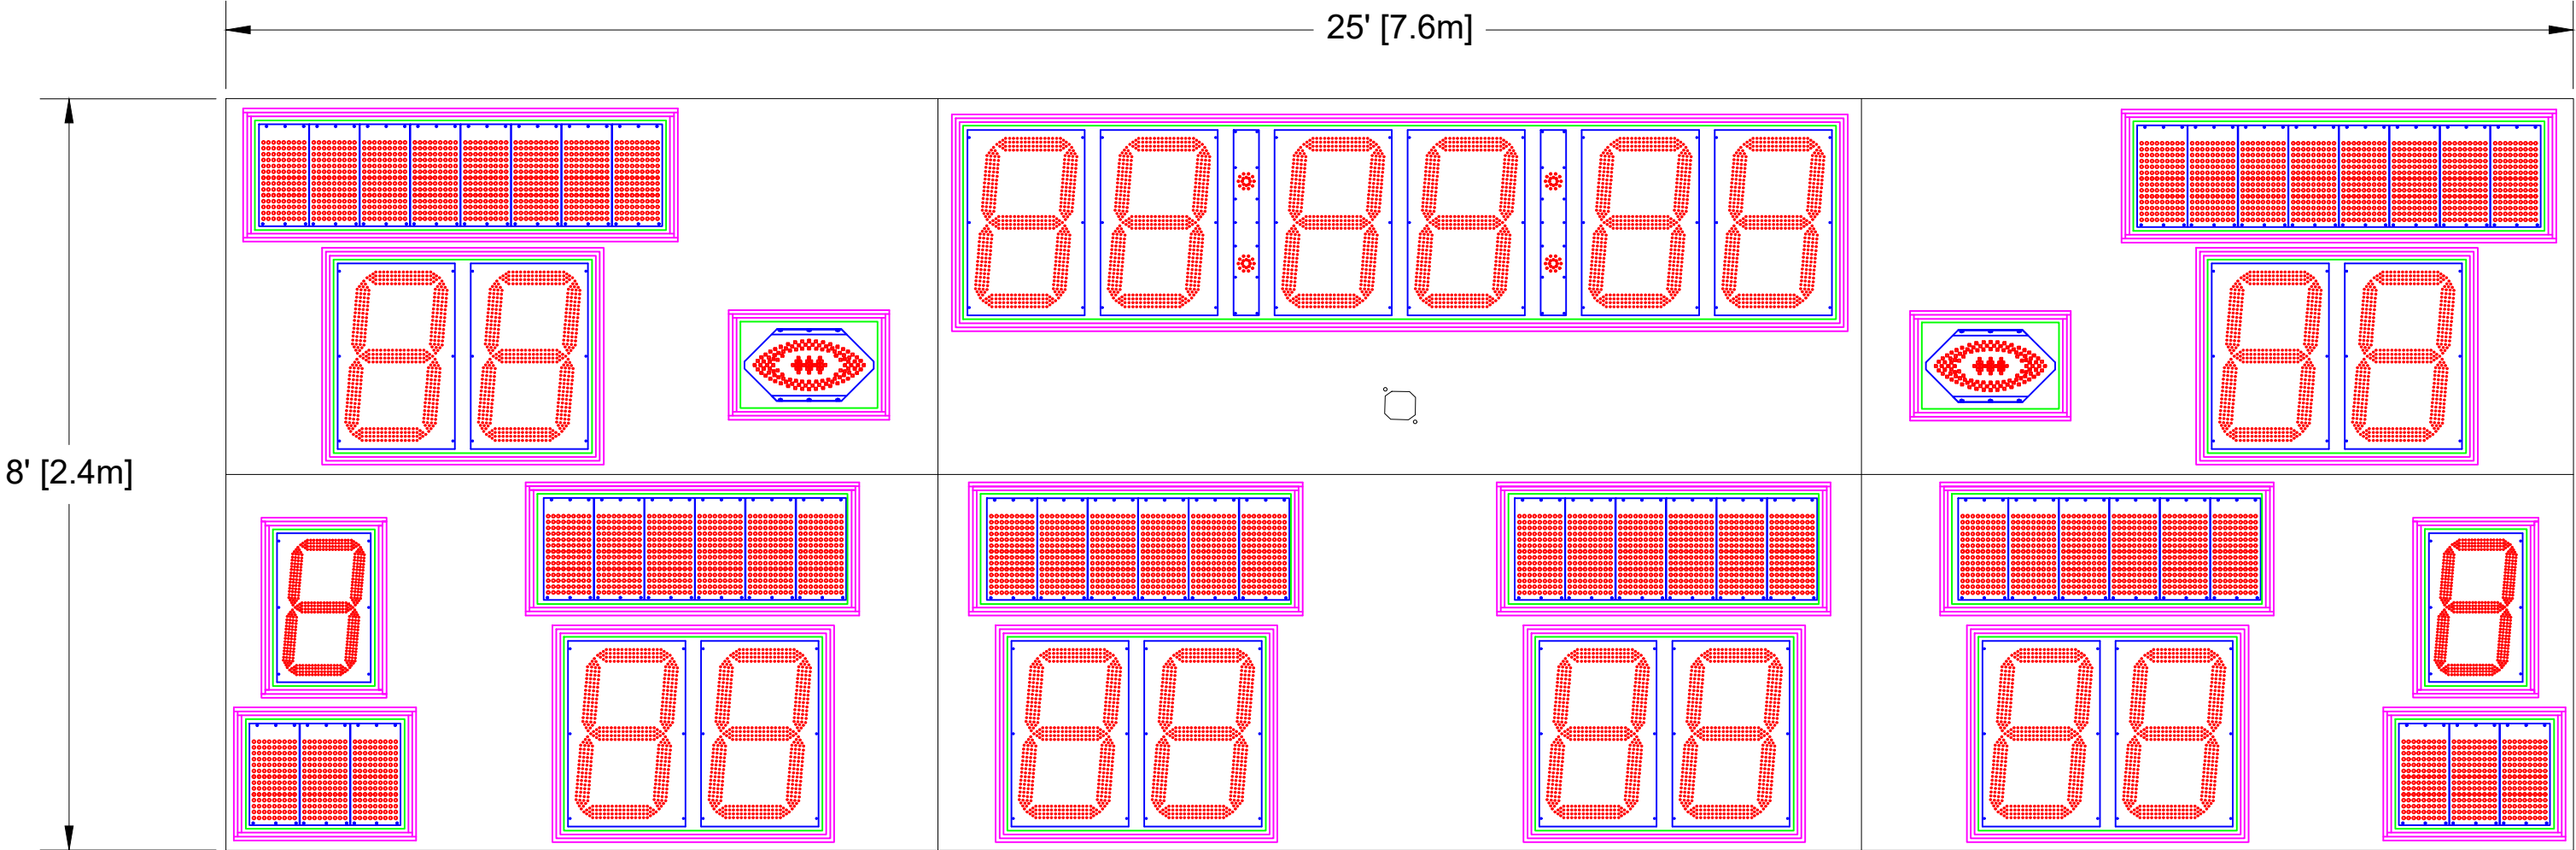



Scoreboard Specifications
Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1141 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the BALL ON Digit.

- 22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR, TOD
- 17" LED Digits for TOL
- 10" Electronic Team names at 8 Ch
- 10" Electronic Captions at 6 Ch
- 10" Electronic Captions at 3 Ch

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	7/29/2020
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
SIZE A	FILENAME M8025AUXH-HF USAGE	INIT DRAWING DATE 7/29/20	REV A
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8025AxCxH-HF			
SCALE NTS DRAWN BY CGTHOMPSON PAGE 1 OF 1			

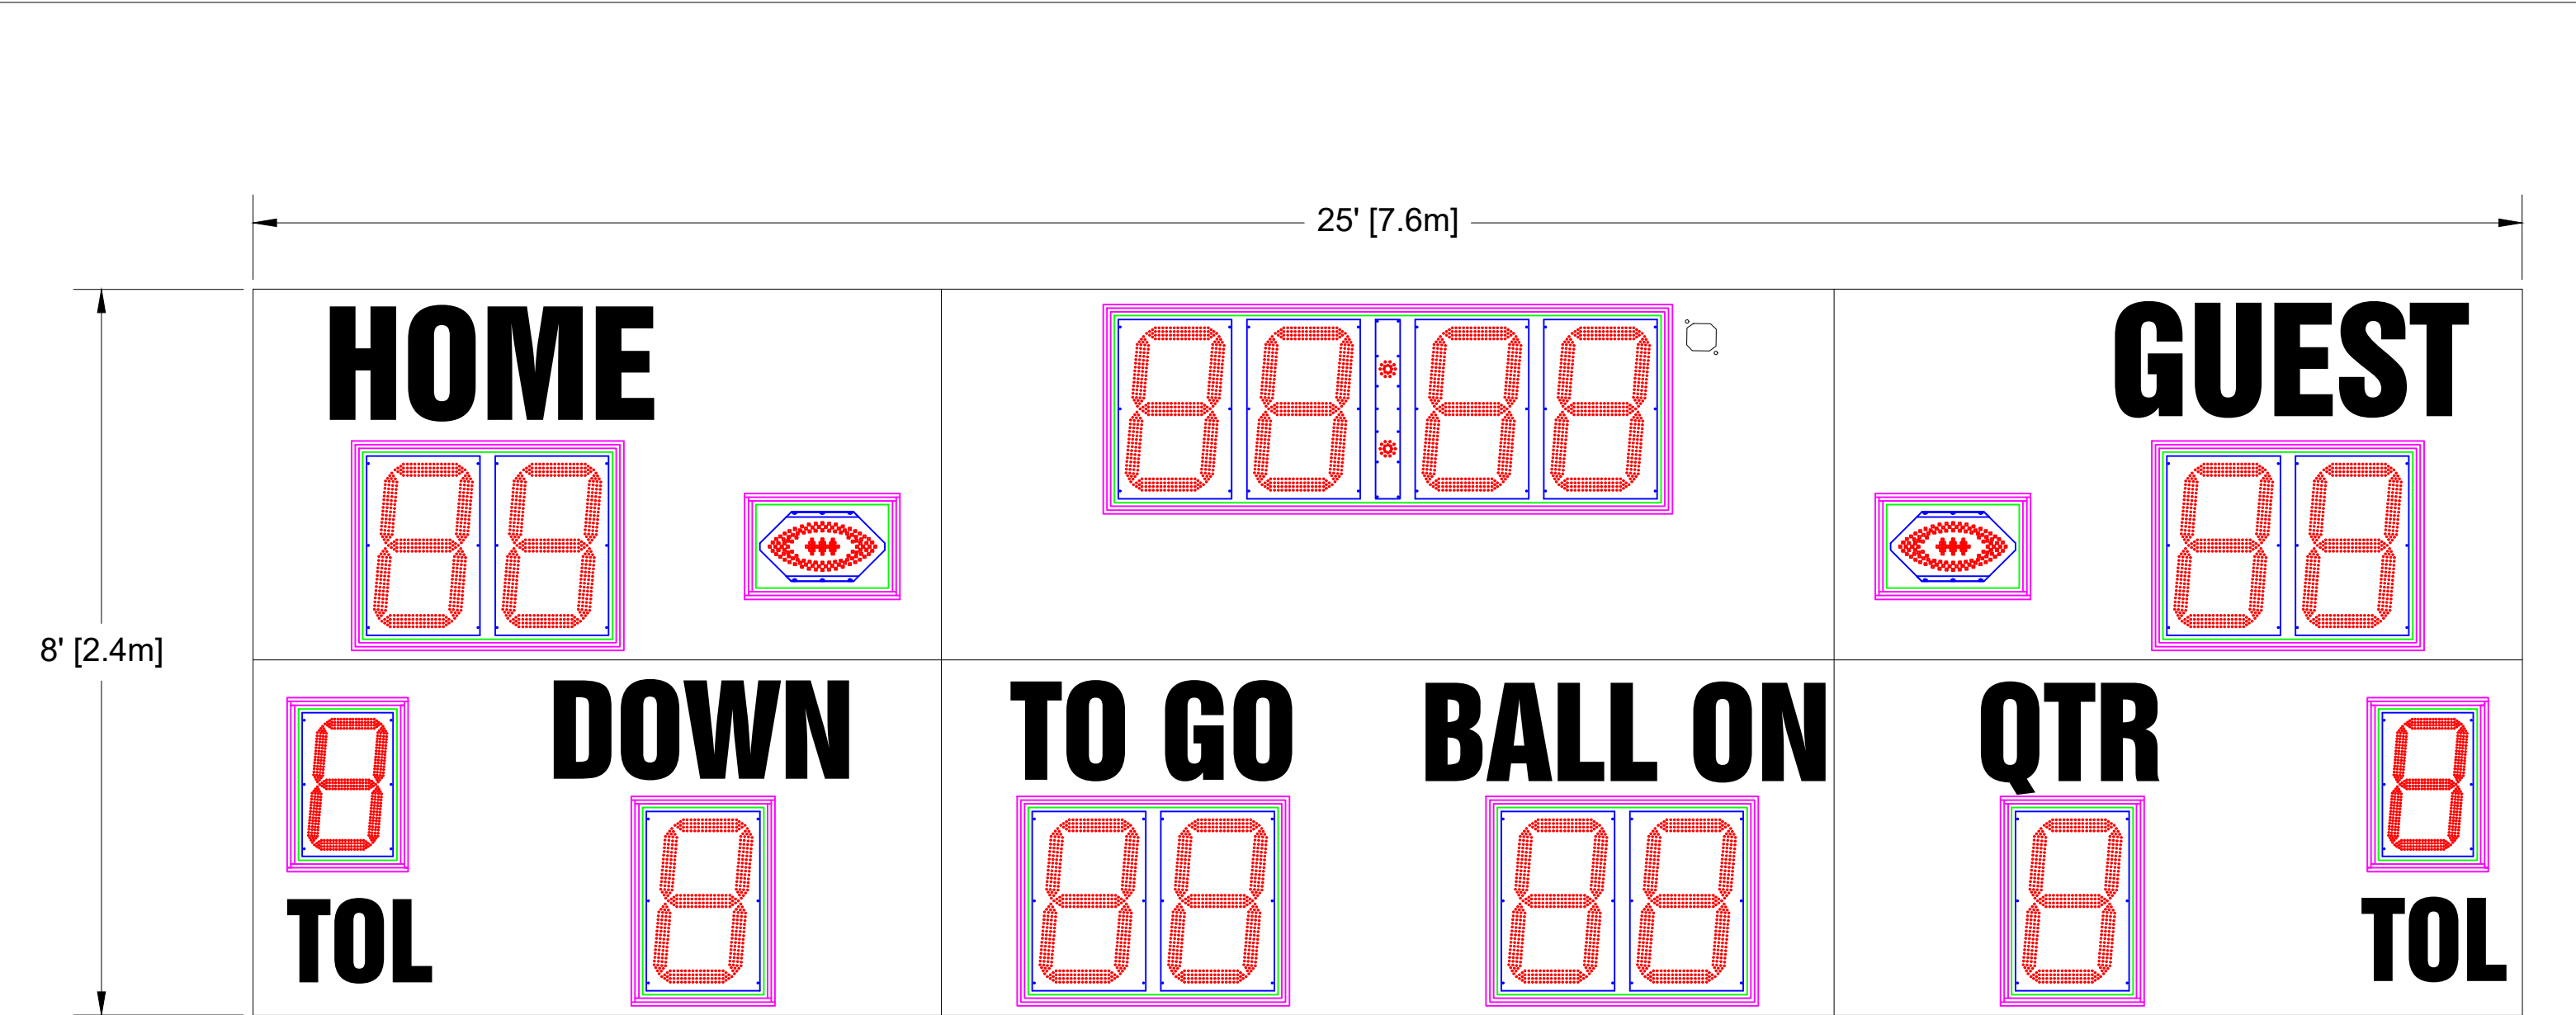

Scoreboard Specifications
Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 997 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 8 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.

22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR, TOD
17" LED Digits for TOL
LED Football Indicator


15" White Vinyl Lettering for HOME, GUEST
13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/5/2021

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8025AUXV	5/5/21	A
USAGE			
USE FOR REVIEW			
SCALE	NTS	DRAWN BY	PAGE
		CGTHOMPSON	1 OF 1

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

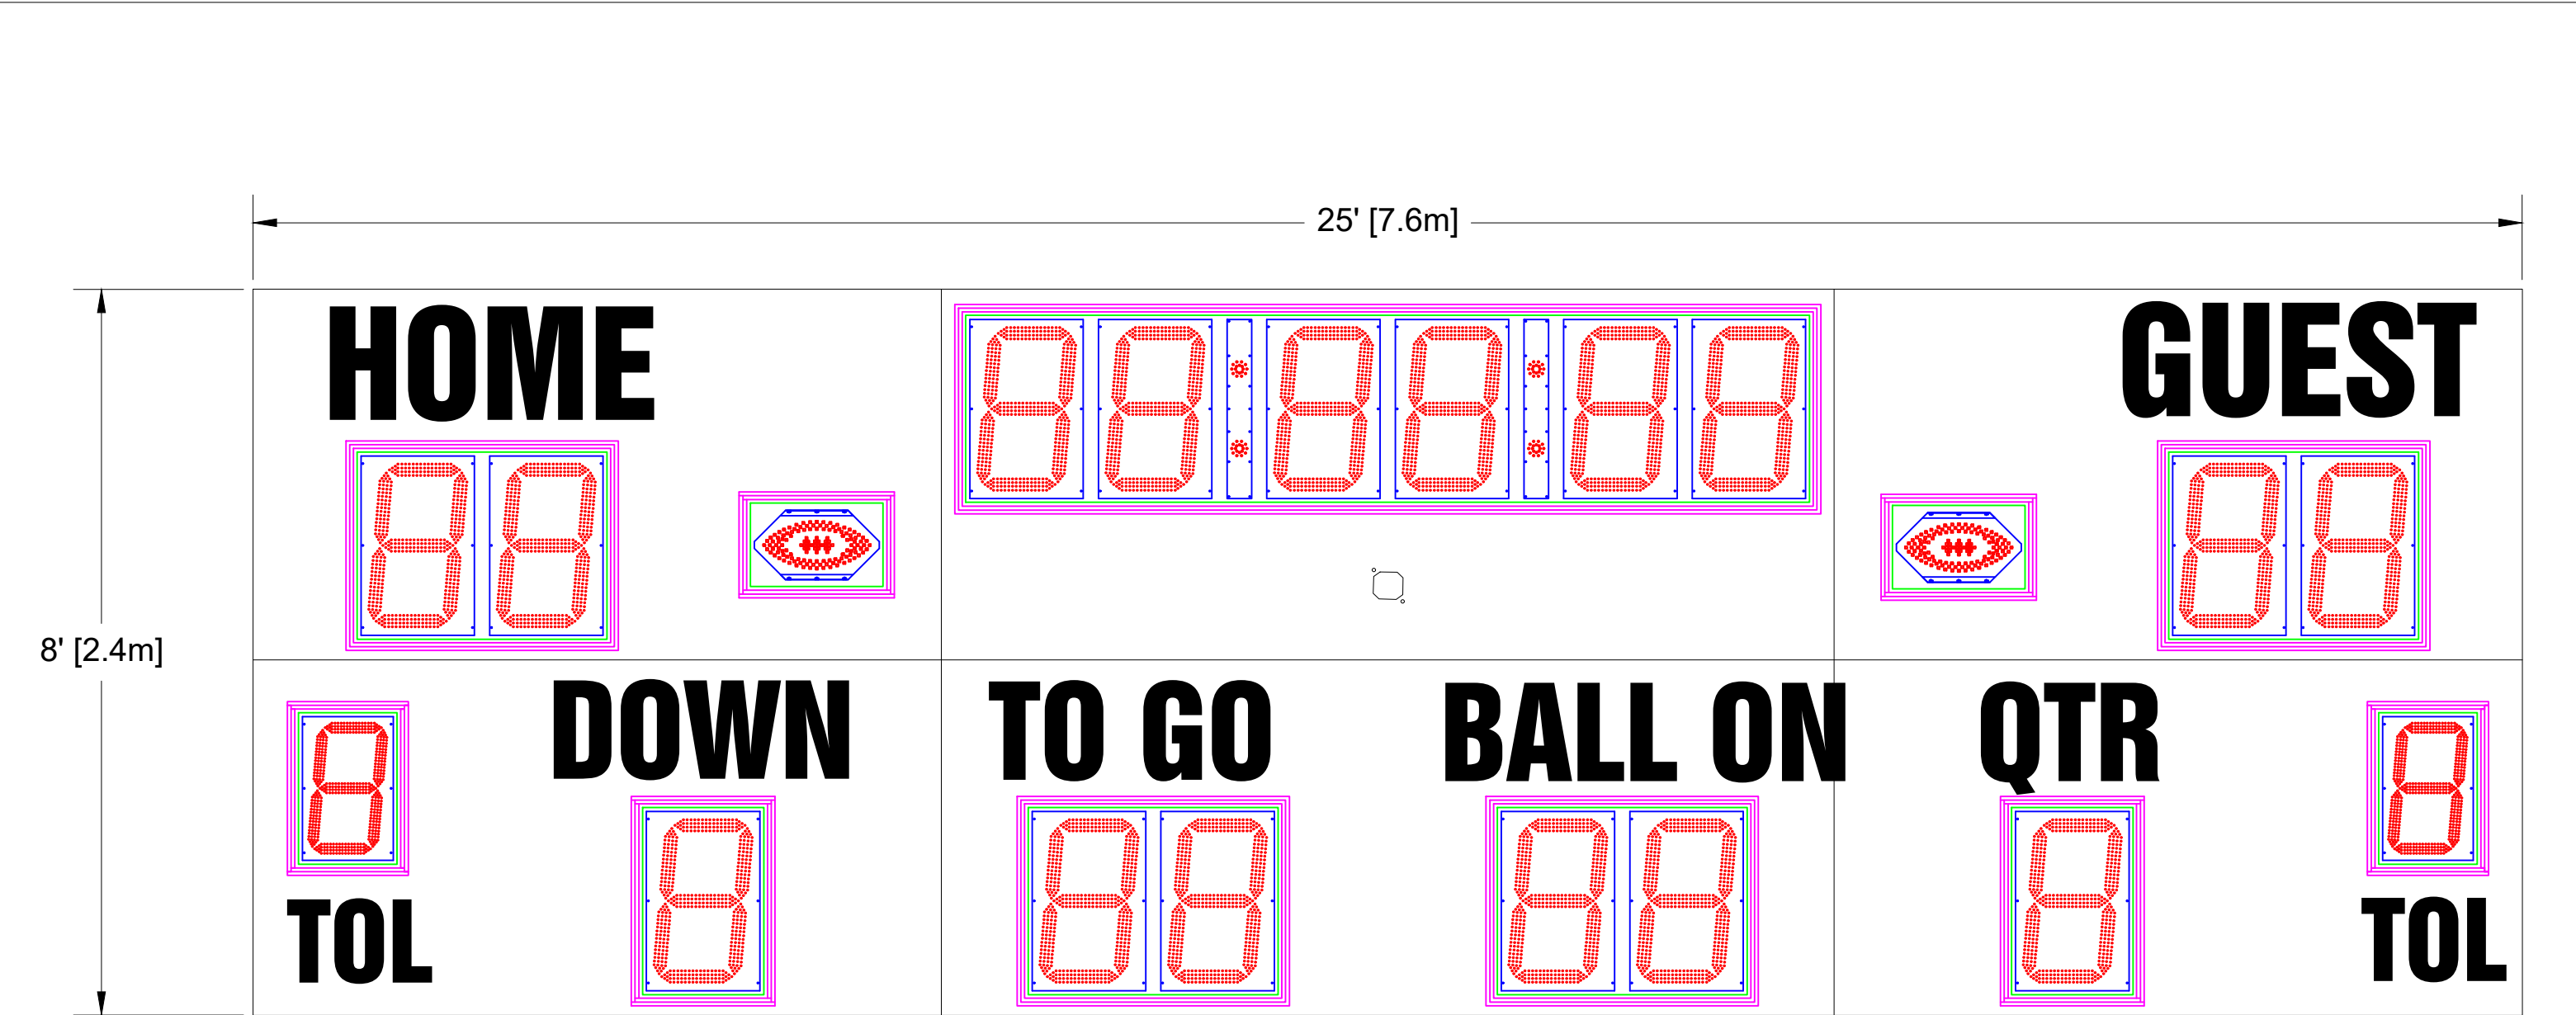

Scoreboard Specifications

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1005 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the BALL ON Digit.

22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR, TOD
17" LED Digits for TOL
LED Football Indicator

15" White Vinyl Lettering for HOME, GUEST
13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/5/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8025AxCV-H		SIZE A	INIT DRAWING DATE 5/5/21
SCALE NTS		FILENAME M8025AUXV-H	REV A
DRAWN BY CGTHOMPSON		PAGE 1 OF 1	

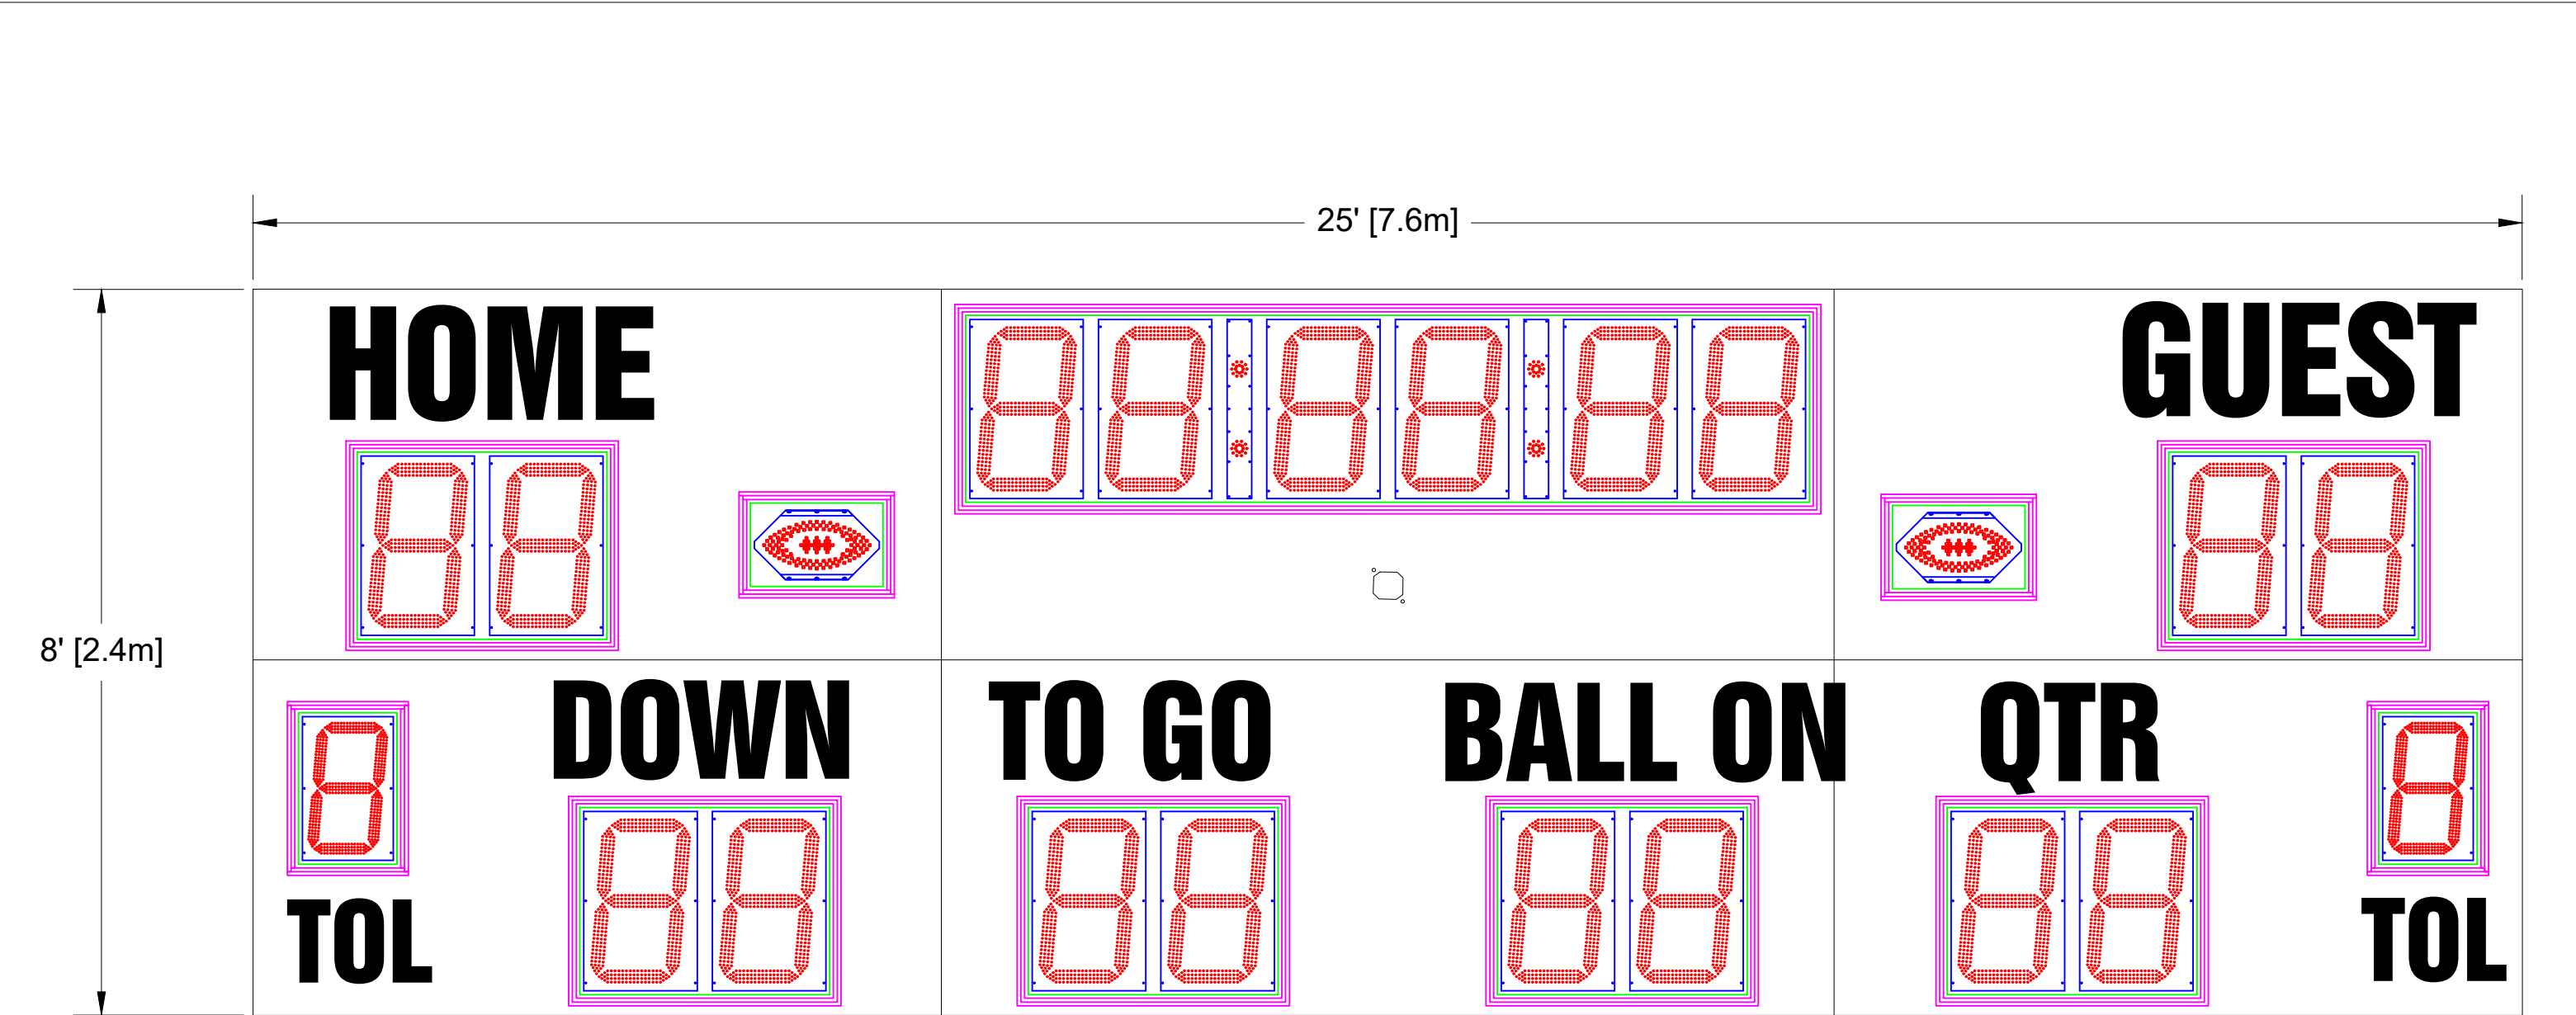

Scoreboard Specifications
Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1020 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the BALL ON Digit.

22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR, TOD
17" LED Digits for TOL
LED Football Indicator

15" White Vinyl Lettering for HOME, GUEST
13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/11/2020
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8025AxCV-HF		SIZE A	INIT DRAWING DATE 3/11/20
SCALE NTS		FILENAME M8025AUXV-HF	REV A
DRAWN BY CGTHOMPSON		PAGE 1 OF 1	

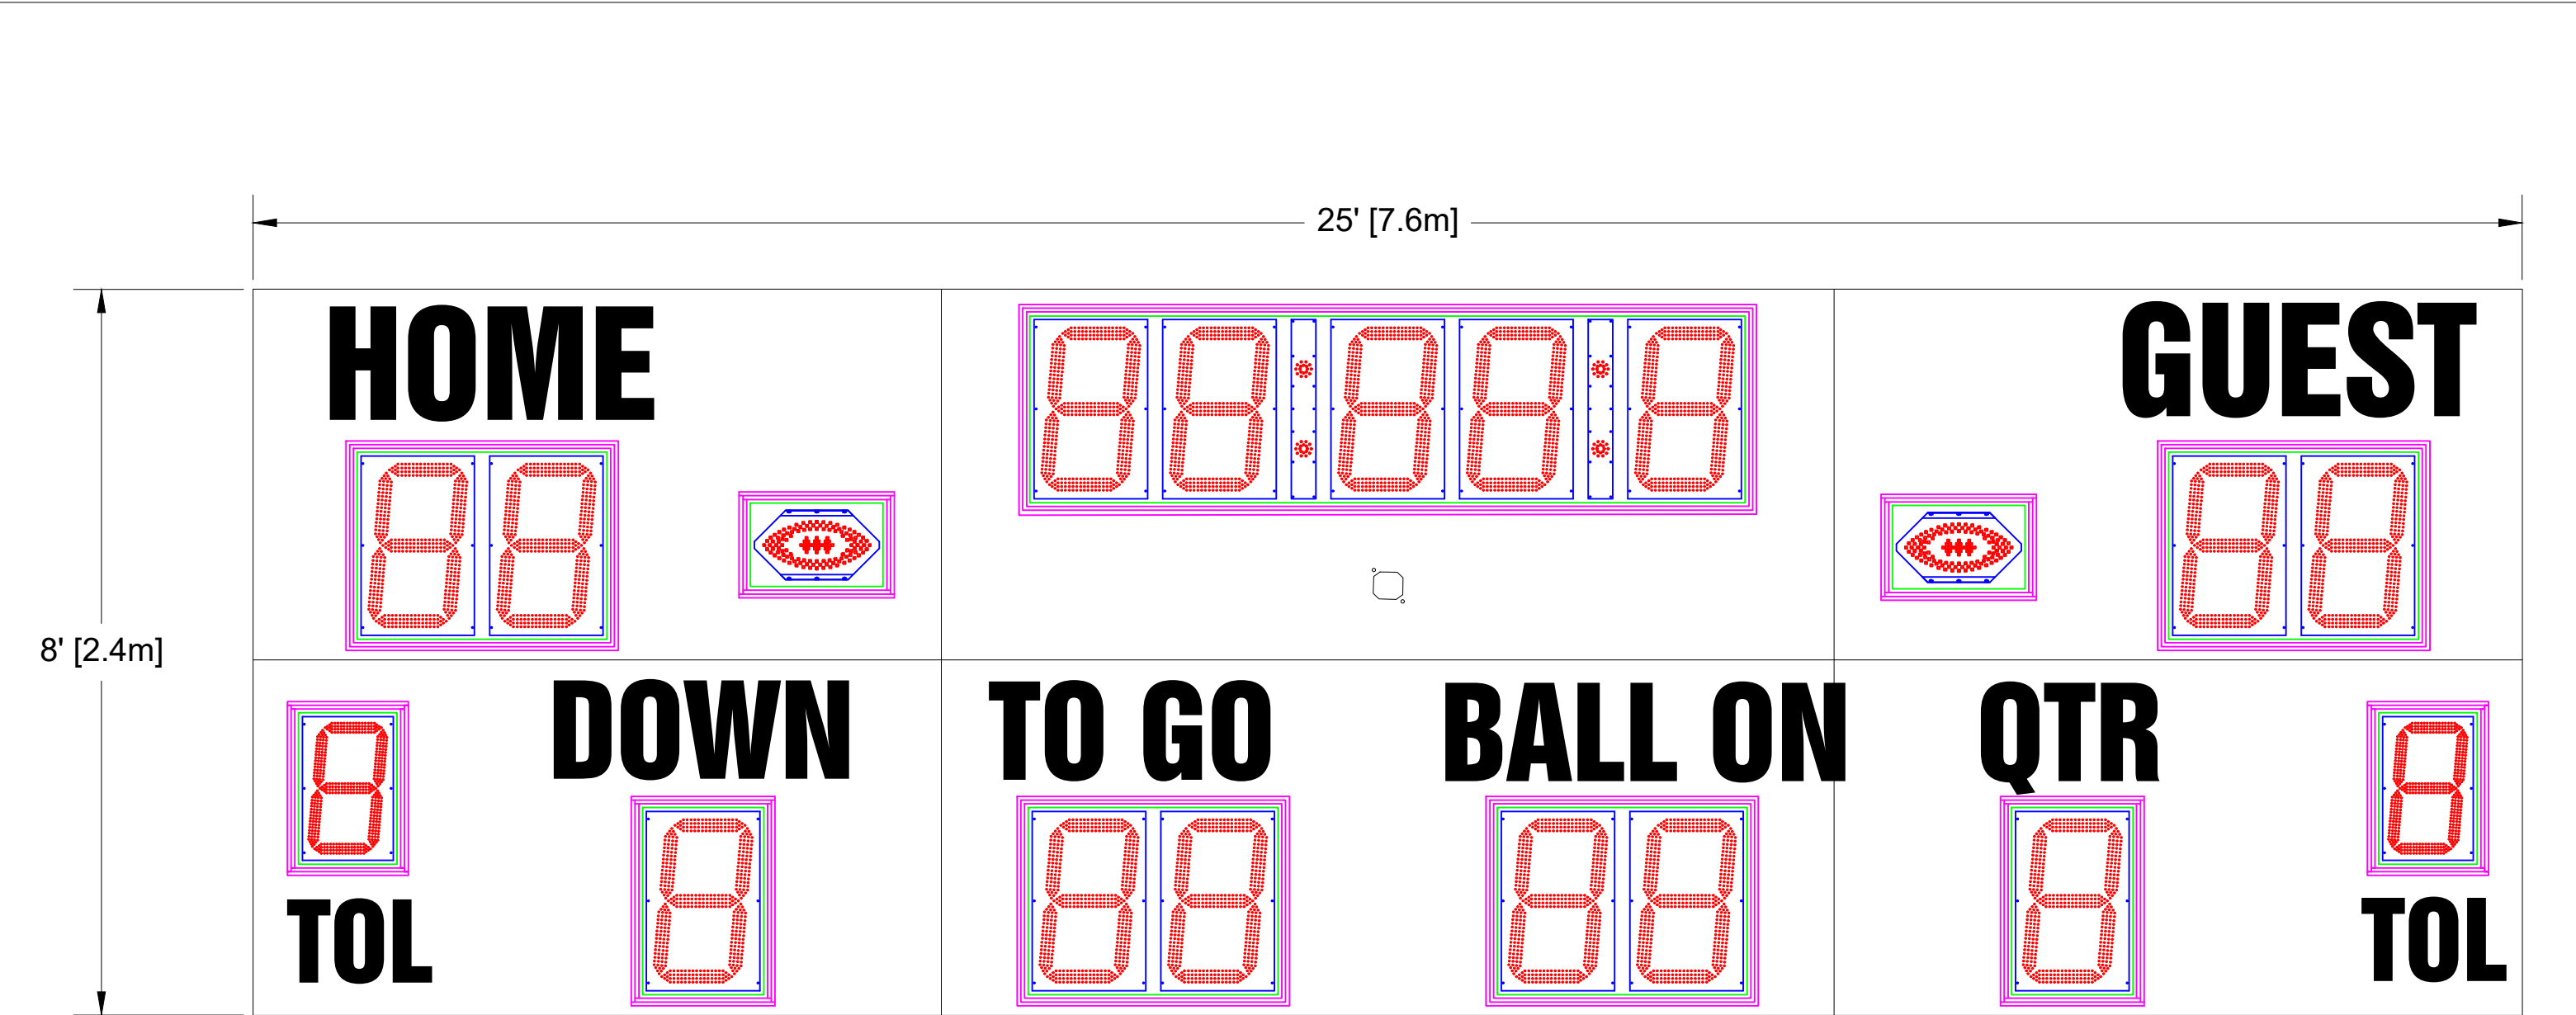

Scoreboard Specifications
Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1000 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.

22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR, TOD
17" LED Digits for TOL
LED Football Indicator

15" White Vinyl Lettering for HOME, GUEST
13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle


REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/5/2021

		<div><div></div><div>OES</div><div>SCOREBOARDS</div></div> <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
		DESCRIPTION OES ELECTRONIC SCOREBOARDS M8025AxCV-T	
SIZE A	FILENAME M8025AUXV-T USAGE USE FOR REVIEW	INIT DRAWING DATE 5/5/21	REV A
SCALE NTS		DRAWN BY CGTHOMPSON	PAGE 1 OF 1

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION
Dimensions are in Inches
Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

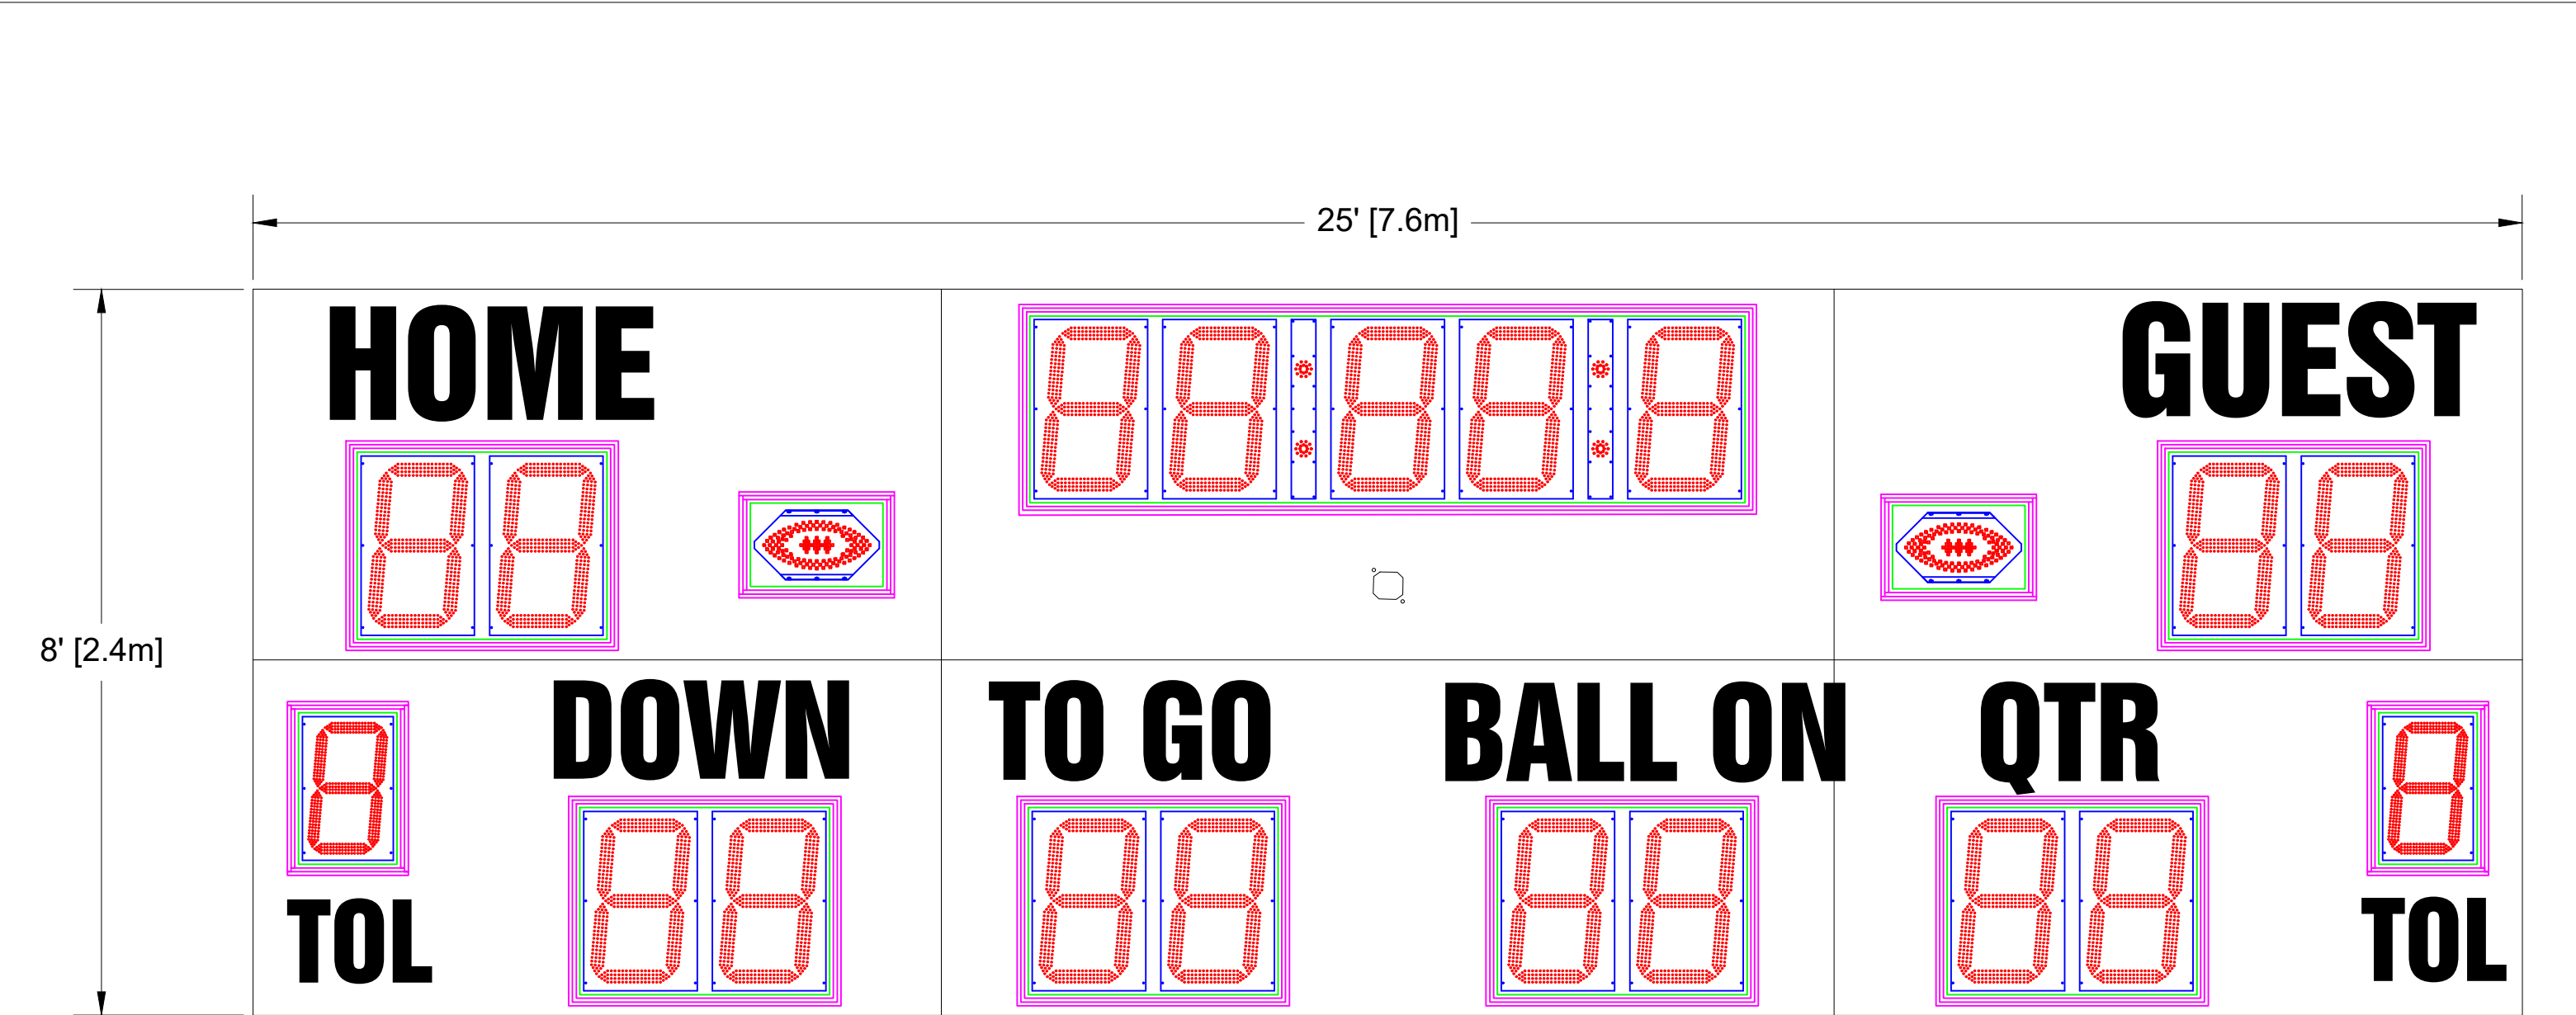

Scoreboard Specifications
Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1013 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.

22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR, TOD
17" LED Digits for TOL
LED Football Indicator

15" White Vinyl Lettering for HOME, GUEST
13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/5/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		OES INC. 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	

DESCRIPTION	SIZE	FILENAME	INIT DRAWING DATE	REV
OES ELECTRONIC SCOREBOARDS M8025AxCV-TF	A	M8025AUXV-TF	5/5/21	A
USE FOR REVIEW				
SCALE	NTS	DRAWN BY	CGTHOMPSON	PAGE 1 OF 1