

Scoreboard Specifications

Overall size: 20' (W) x 8' (H) x 6" (D)
Approximate Weight: 828 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


22" LED Digits for HOME, GUEST, TOD
17" LED Digits for DOWN, TO GO, BALL ON, QTR
14" LED Digits for TOL

10" Electronic Team Names of 8 characters

9" White Vinyl Lettering For TOL, DOWN, TO GO, BALL ON, QTR

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/13/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8020AxCE		SIZE A	REV A
FILENAME M8020AUXE		INIT DRAWING DATE 12/13/21	USAGE USE FOR REVIEW
SCALE NTS		DRAWN BY CGTHOMPSON	PAGE 1 OF 1

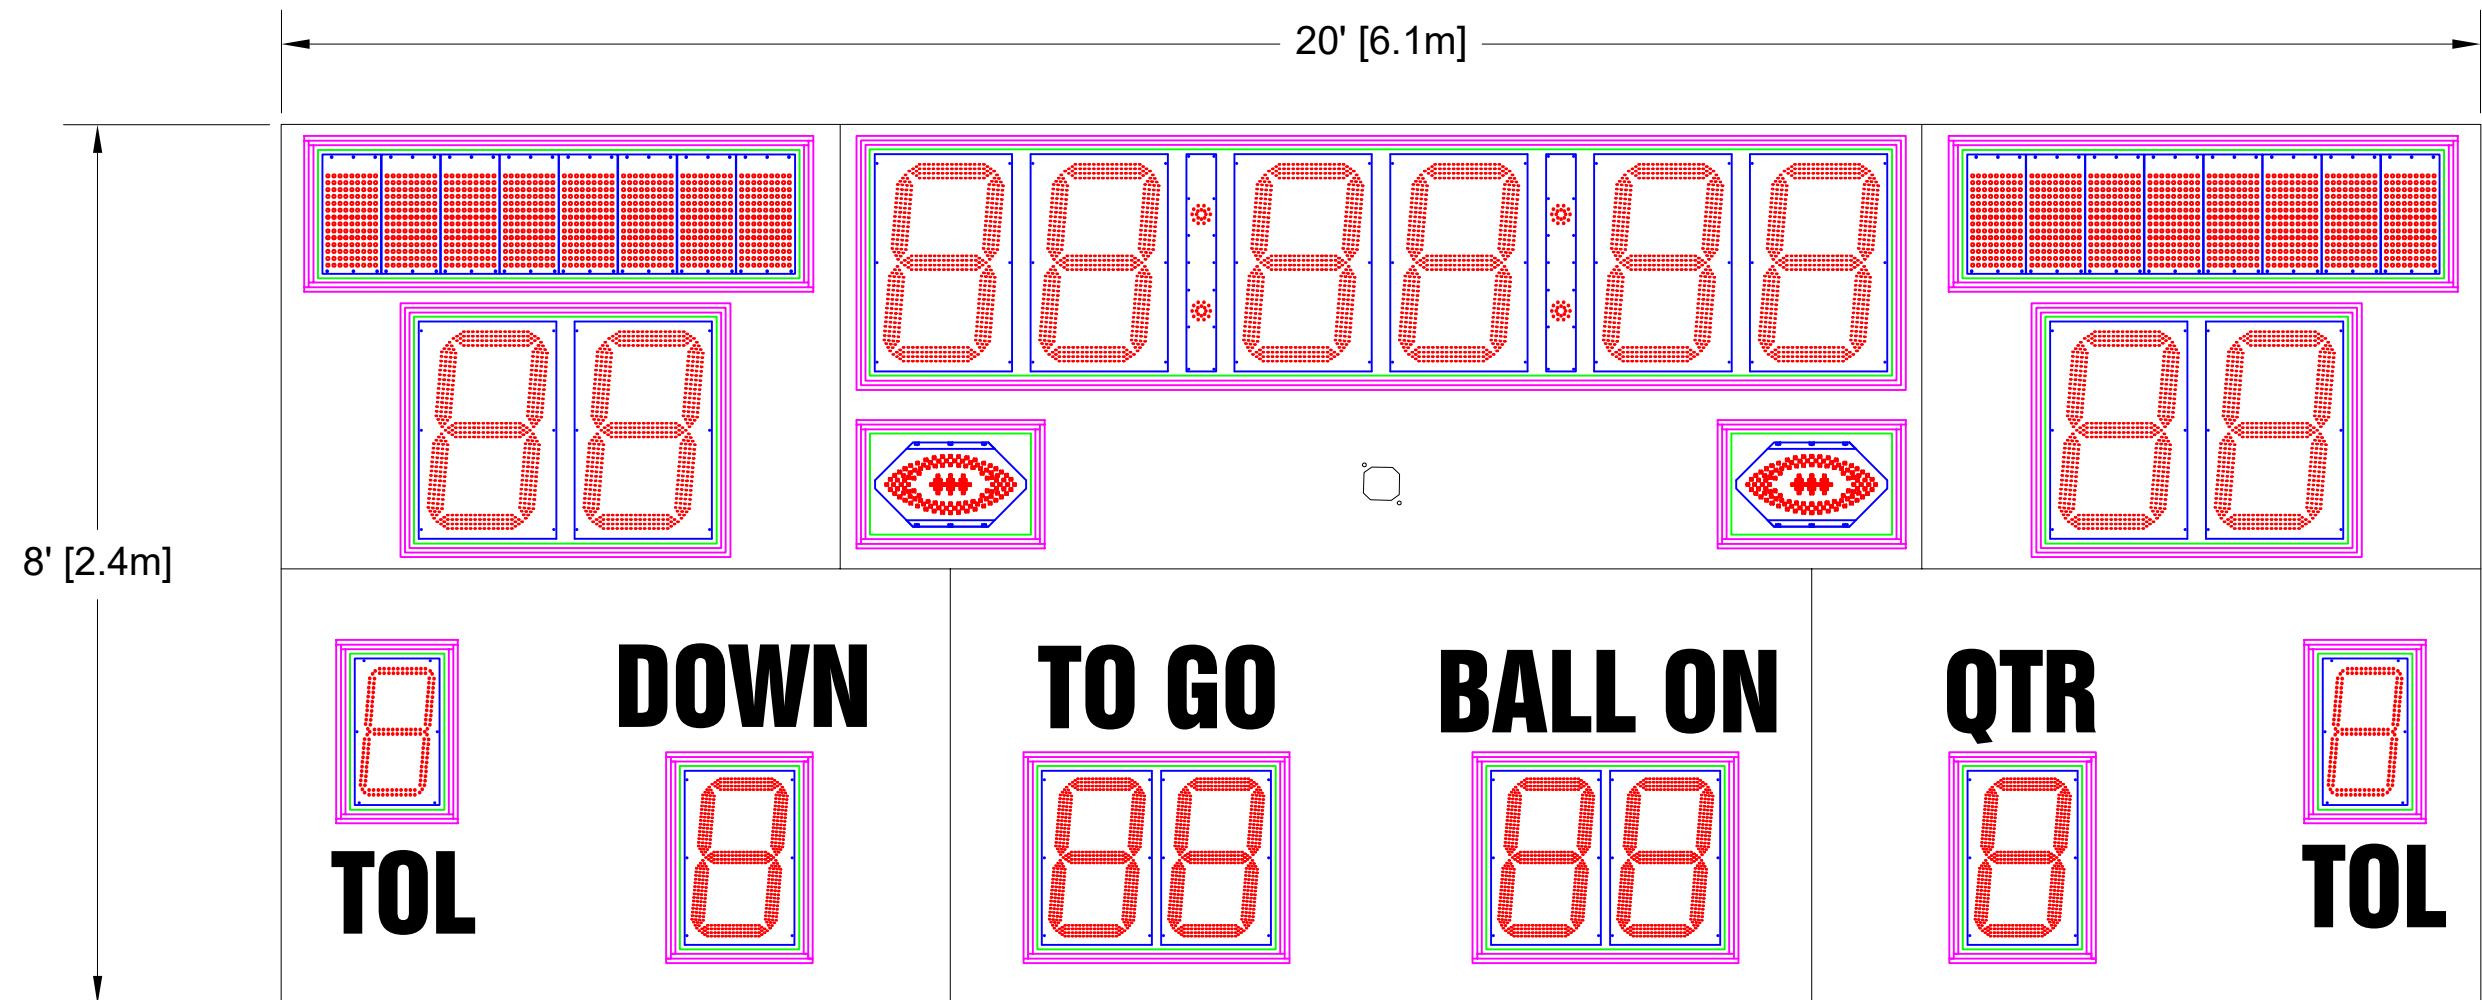

Scoreboard Specifications
Overall size: 20' (W) x 8' (H) x 6" (D)
Approximate Weight: 853 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


22" LED Digits for HOME, GUEST, TOD
17" LED Digits for DOWN, TO GO, BALL ON, QTR
14" LED Digits for TOL

10" Electronic Team Names of 8 characters

9" White Vinyl Lettering For TOL, DOWN, TO GO, BALL ON, QTR

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/13/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES INC. 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
DESCRIPTION		OES ELECTRONIC SCOREBOARDS M8020AxCE-H	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8020AUXE-H	12/13/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1

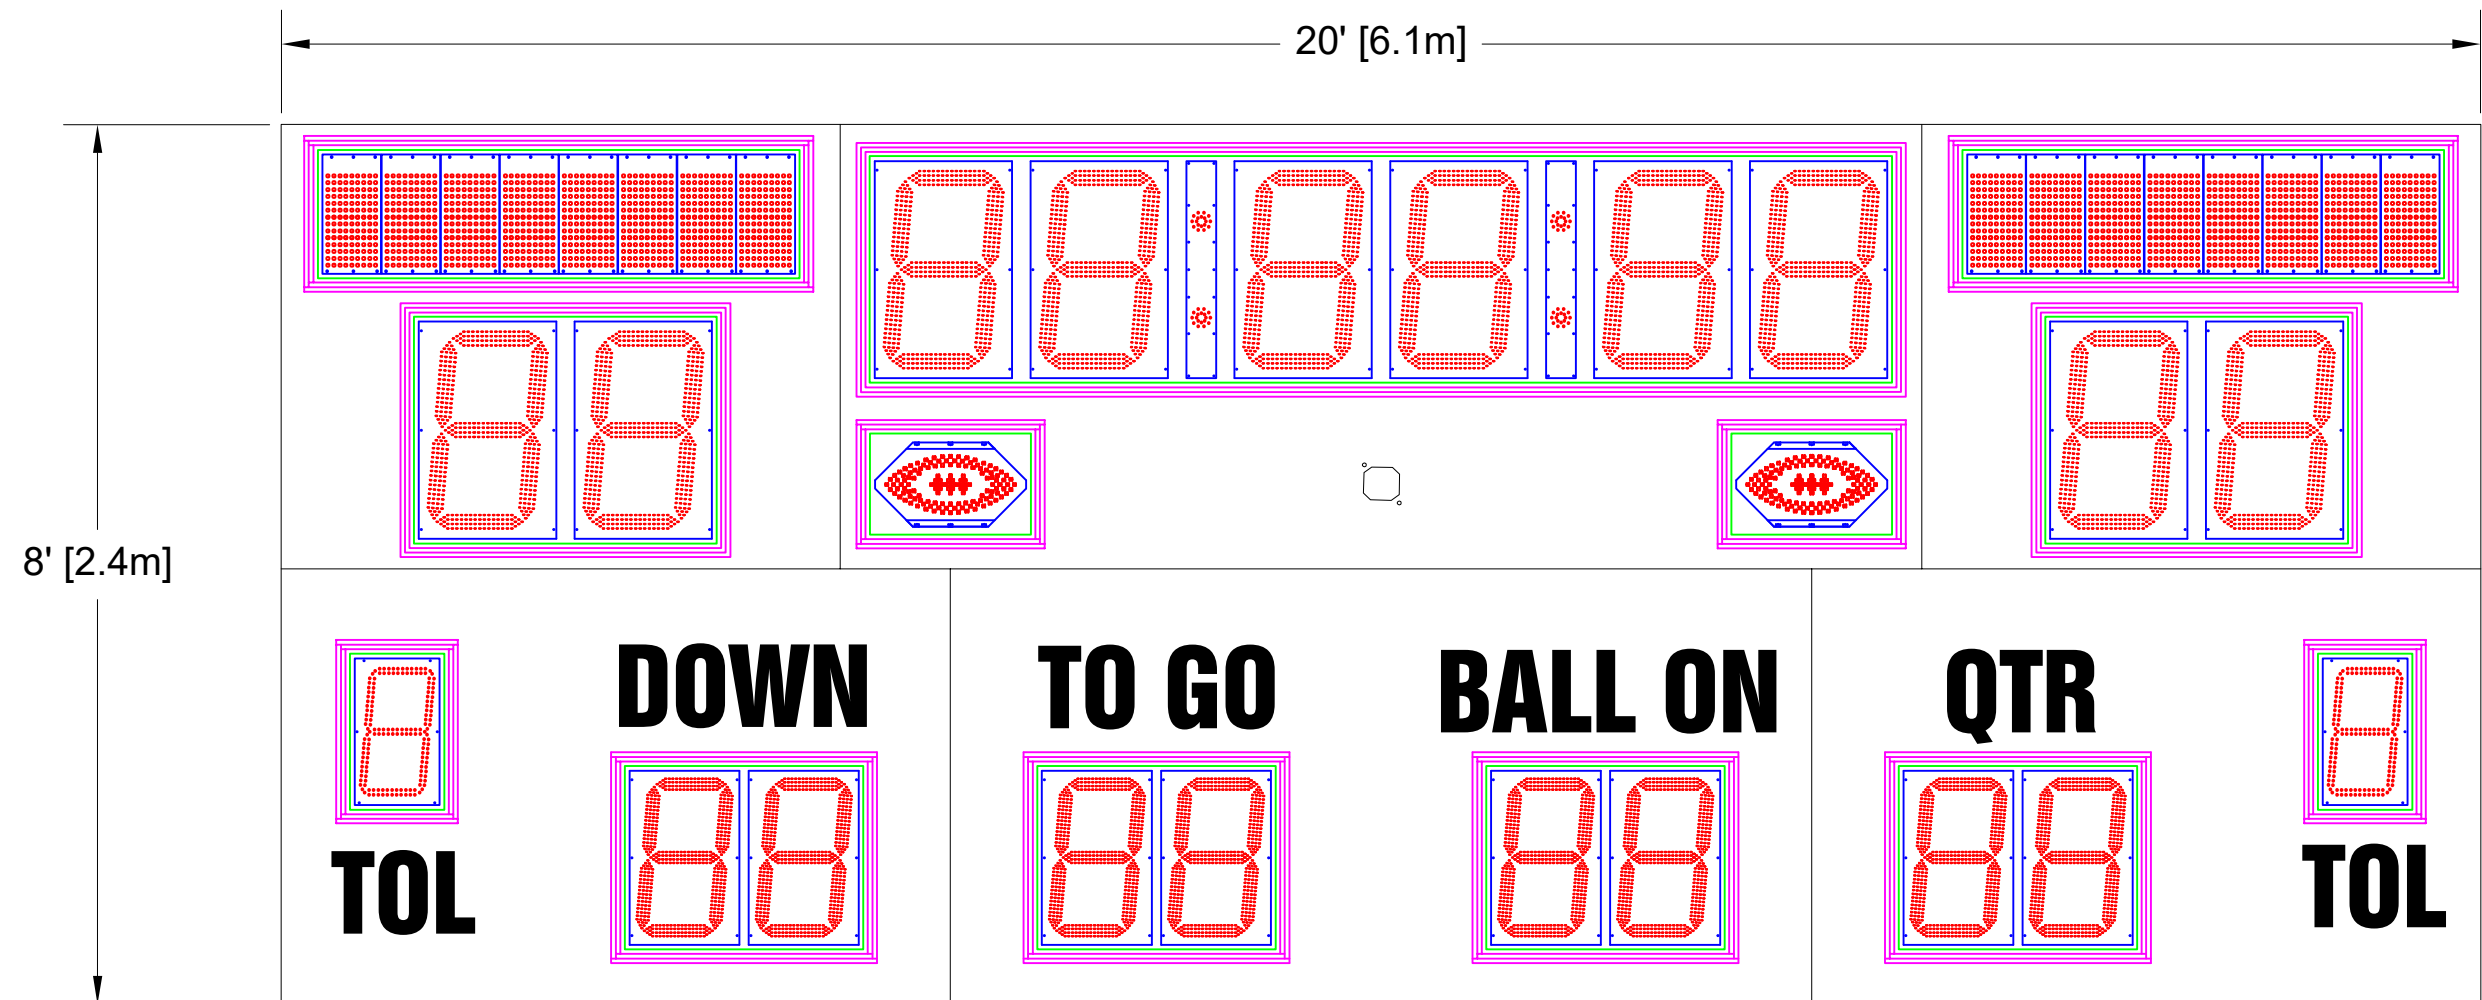

Scoreboard Specifications

Overall size: 20' (W) x 8' (H) x 6" (D)
Approximate Weight: 865 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

22" LED Digits for HOME, GUEST, TOD
17" LED Digits for DOWN, TO GO, BALL ON, QTR
14" LED Digits for TOL


10" Electronic Team Names of 8 characters

9" White Vinyl Lettering For TOL, DOWN, TO GO, BALL ON, QTR

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	8/6/2020
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES INC. 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
DESCRIPTION		OES ELECTRONIC SCOREBOARDS M8020AxCE-HF	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8020AUXE-HF	8/6/20	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1

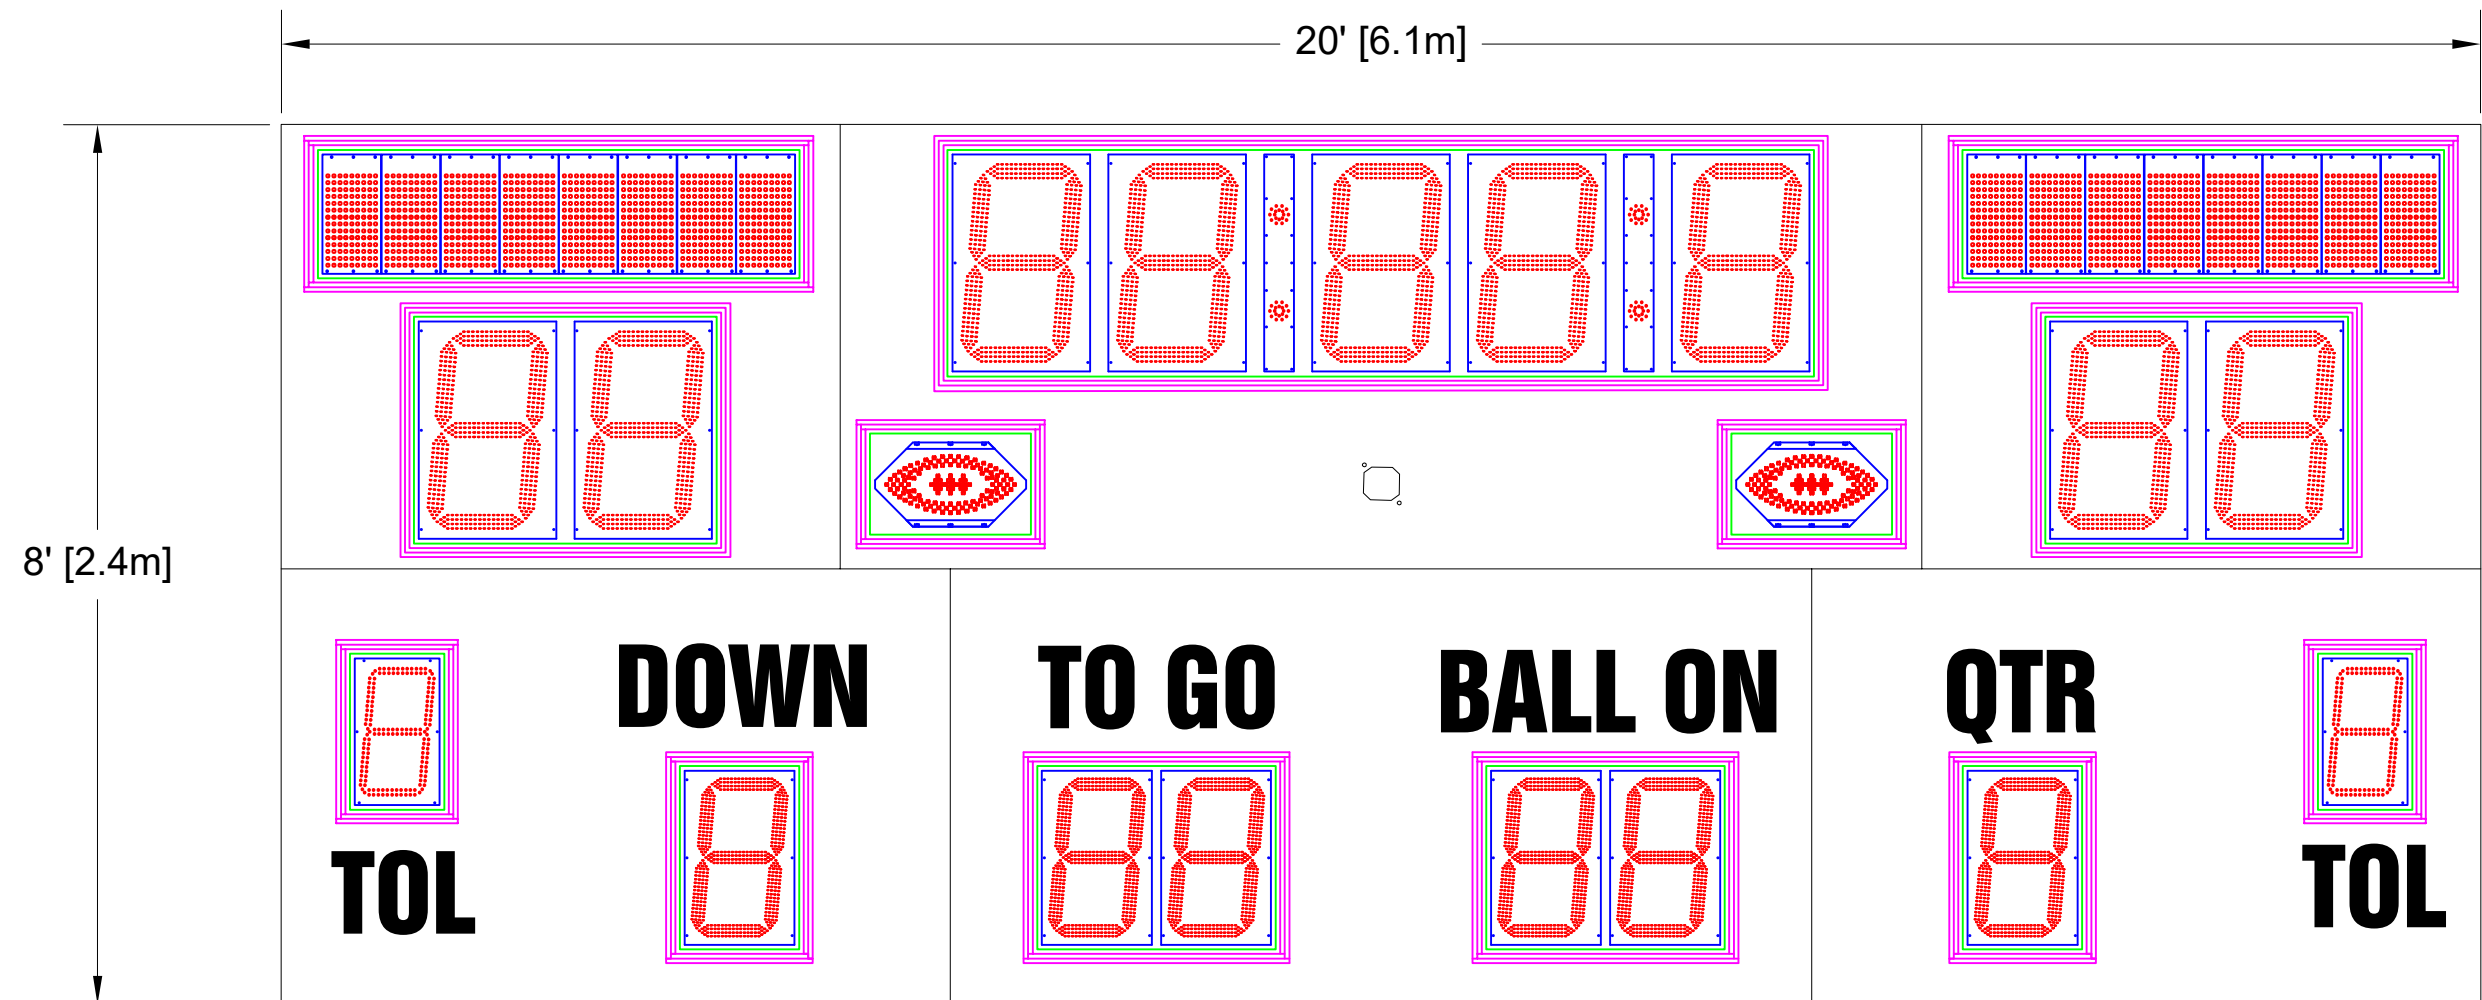

Scoreboard Specifications

Overall size: 20' (W) x 8' (H) x 6" (D)
Approximate Weight: 843 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

22" LED Digits for HOME, GUEST, TOD
17" LED Digits for DOWN, TO GO, BALL ON, QTR
14" LED Digits for TOL


10" Electronic Team Names of 8 characters

9" White Vinyl Lettering For TOL, DOWN, TO GO, BALL ON, QTR

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/6/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES SCOREBOARDS 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
DESCRIPTION		OES ELECTRONIC SCOREBOARDS M8020AxCE-T	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8020AUXE-T	5/6/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE 1 OF 1

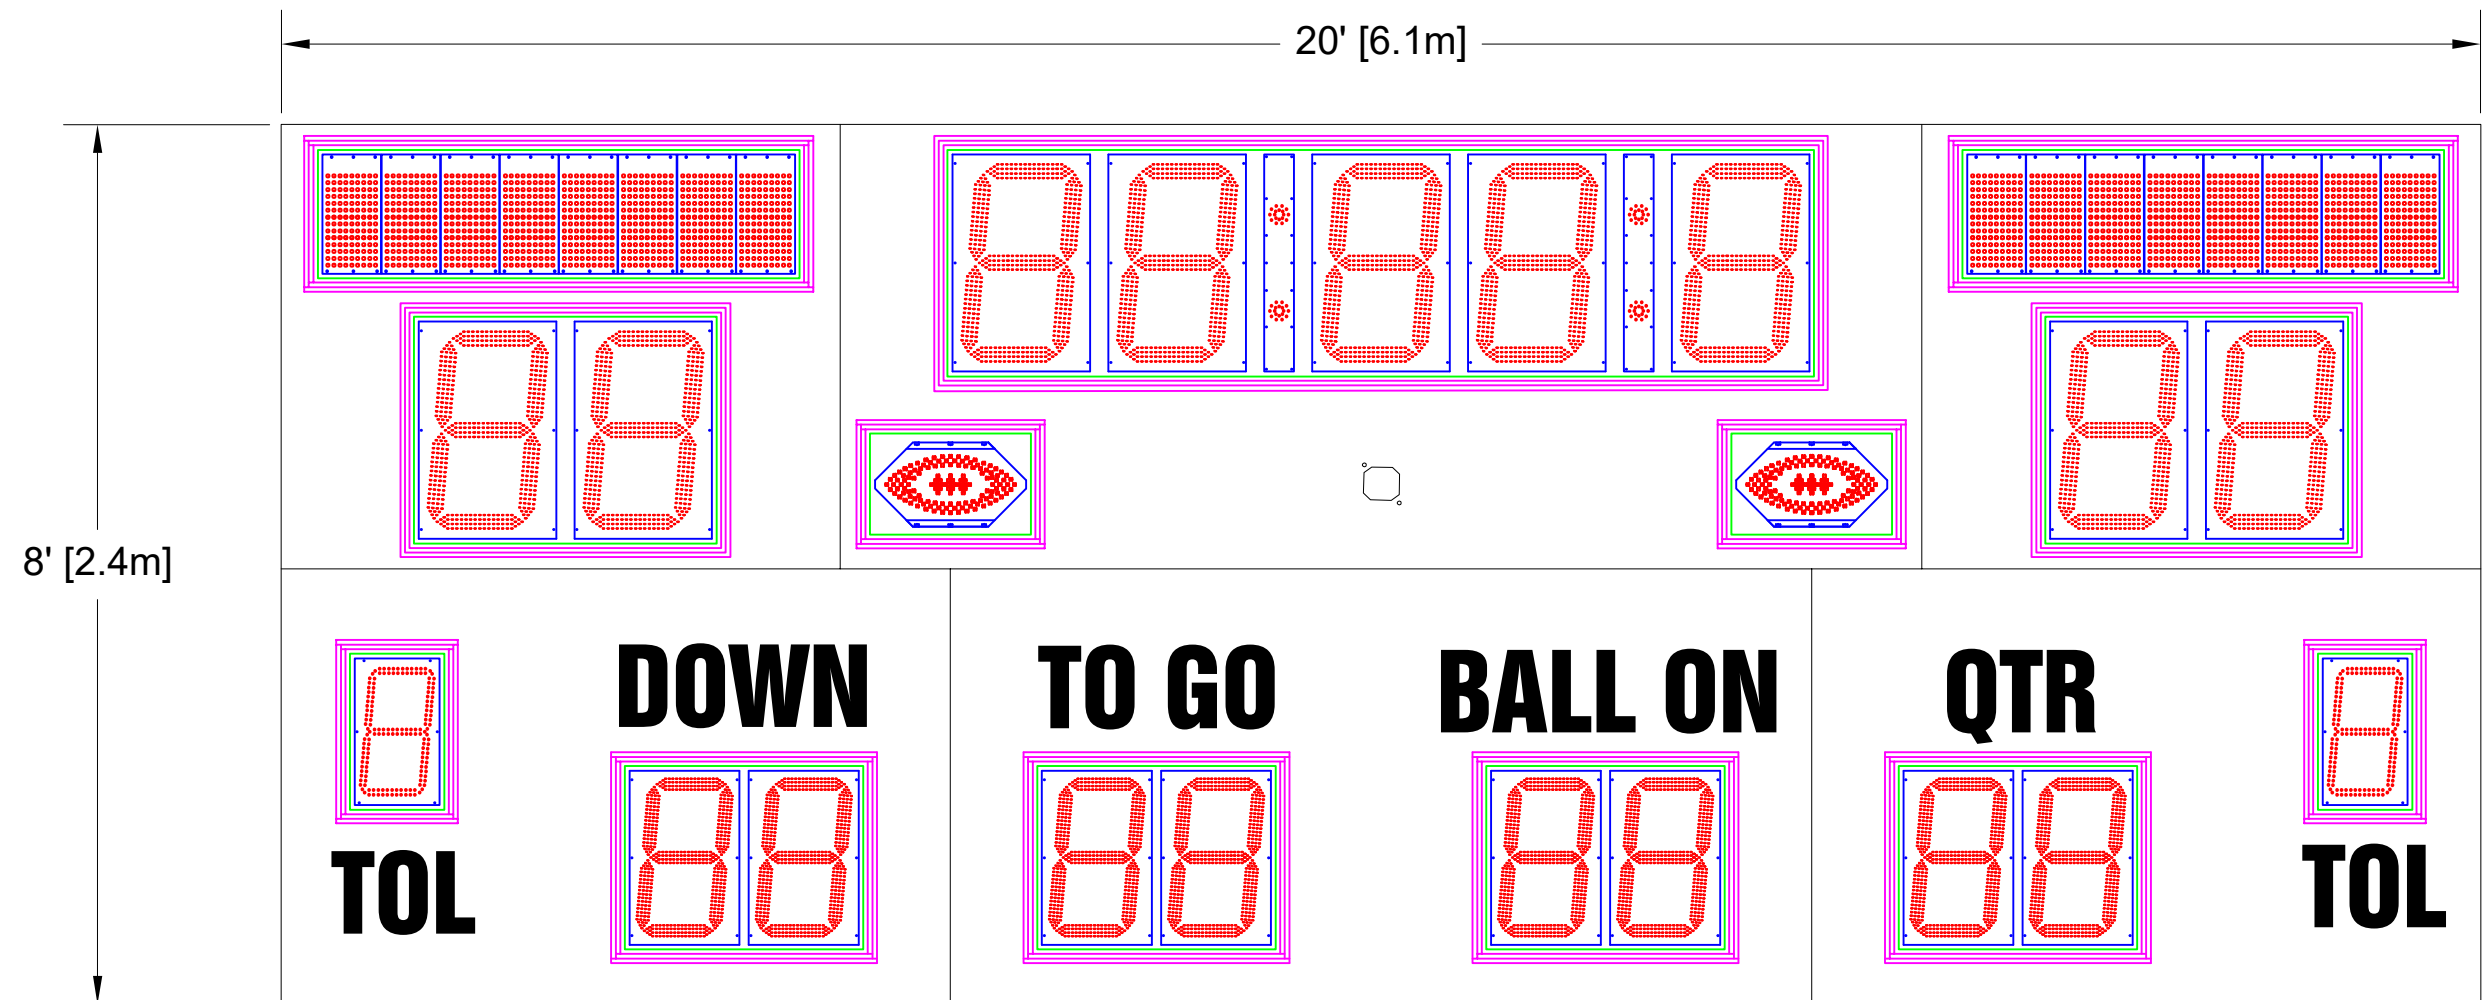

Scoreboard Specifications

Overall size: 20' (W) x 8' (H) x 6" (D)
Approximate Weight: 856 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

22" LED Digits for HOME, GUEST, TOD
17" LED Digits for DOWN, TO GO, BALL ON, QTR
14" LED Digits for TOL


10" Electronic Team Names of 8 characters

9" White Vinyl Lettering For TOL, DOWN, TO GO, BALL ON, QTR

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/13/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES INC. 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
DESCRIPTION		OES ELECTRONIC SCOREBOARDS M8020AxCE-TF	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8020AUXE-TF	12/13/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1

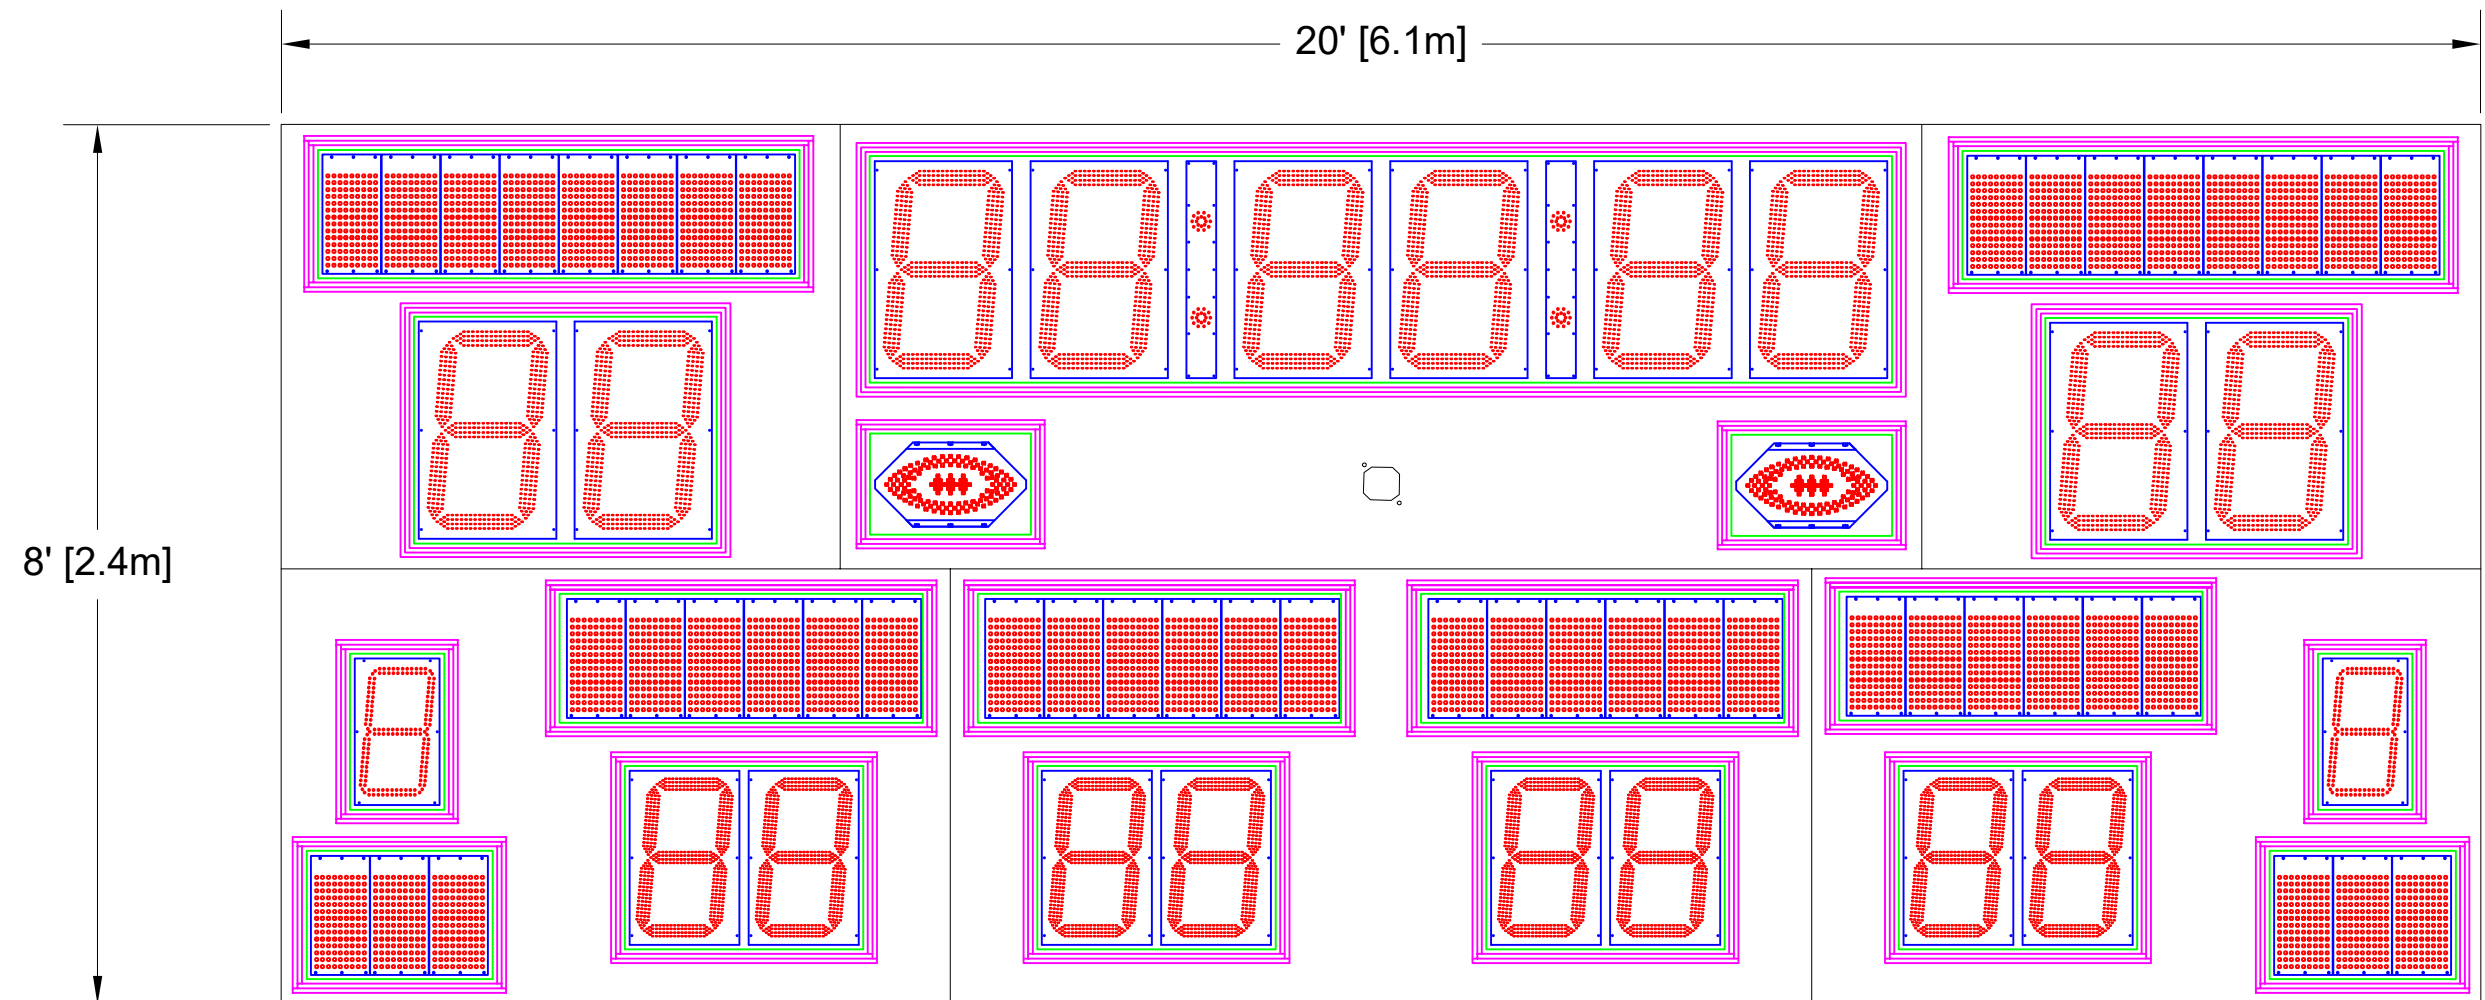

Scoreboard Specifications

Overall size: 20' (W) x 8' (H) x 6" (D)
Approximate Weight: 941 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


22" LED Digits for HOME, GUEST, TOD
17" LED Digits for DOWN, TO GO, BALL ON, QTR
14" LED Digits for TOL

10" Electronic Team Names of 8 characters
10" Electronic Captions of 6 characters
10" Electronic Captions of 3 characters

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	8/6/2020

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		THIRD ANGLE PROJECTIONS	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES SCOREBOARDS	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8020AxCH-HF		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
SIZE A	FILENAME M8020AUXH-HF	INIT DRAWING DATE 8/6/20	REV A
USAGE USE FOR REVIEW			
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	

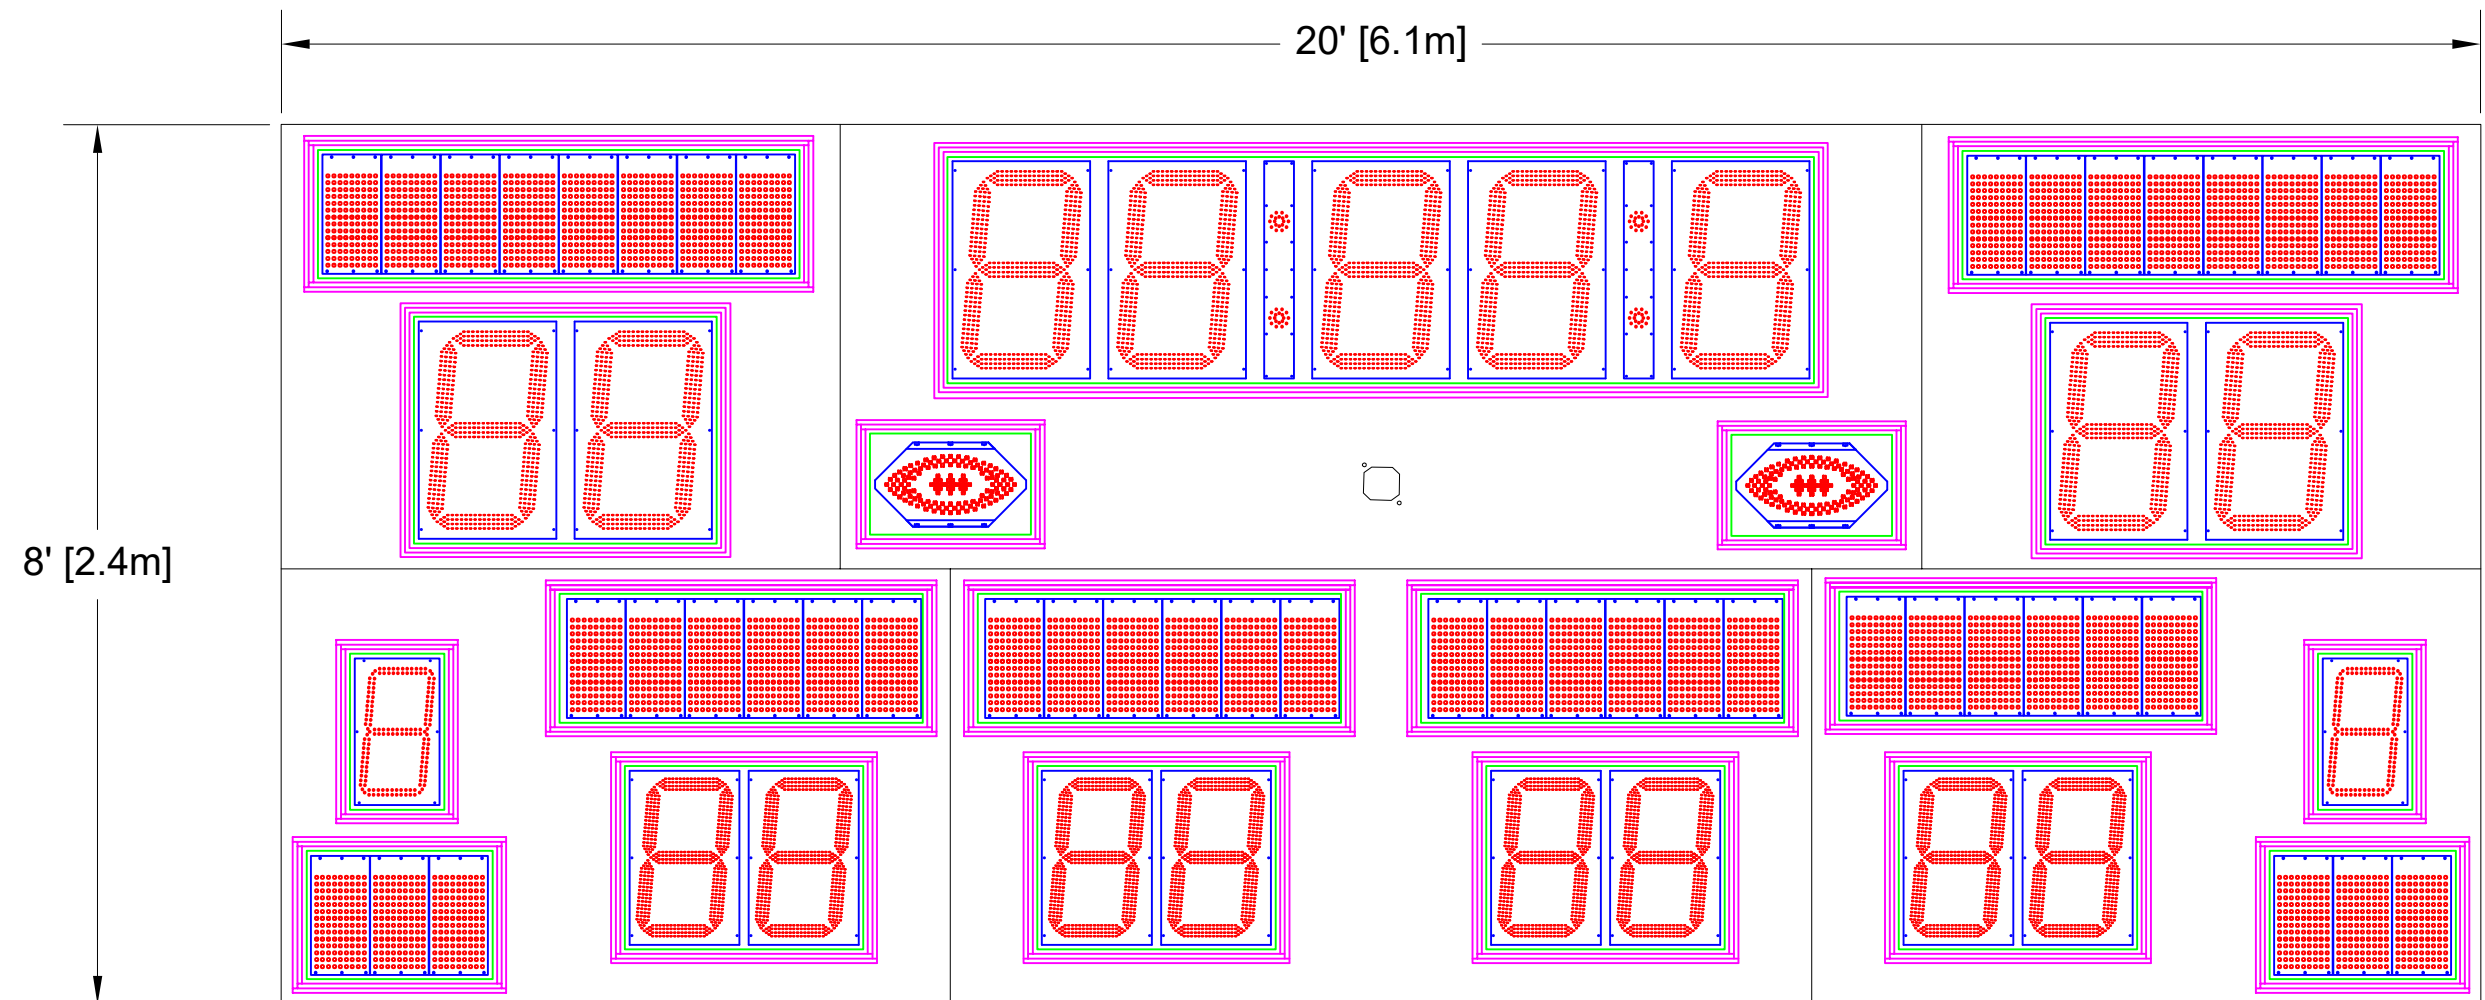

Scoreboard Specifications

Overall size: 20' (W) x 8' (H) x 6" (D)
Approximate Weight: 932 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


22" LED Digits for HOME, GUEST, TOD
17" LED Digits for DOWN, TO GO, BALL ON, QTR
14" LED Digits for TOL

10" Electronic Team Names of 8 characters
10" Electronic Captions of 6 characters
10" Electronic Captions of 3 characters

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/6/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		THIRD ANGLE PROJECTIONS	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES SCOREBOARDS	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8020AxCH-TF		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
SIZE A	FILENAME M8020AUXH-TF	INIT DRAWING DATE 5/6/21	REV A
USE FOR REVIEW			
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	

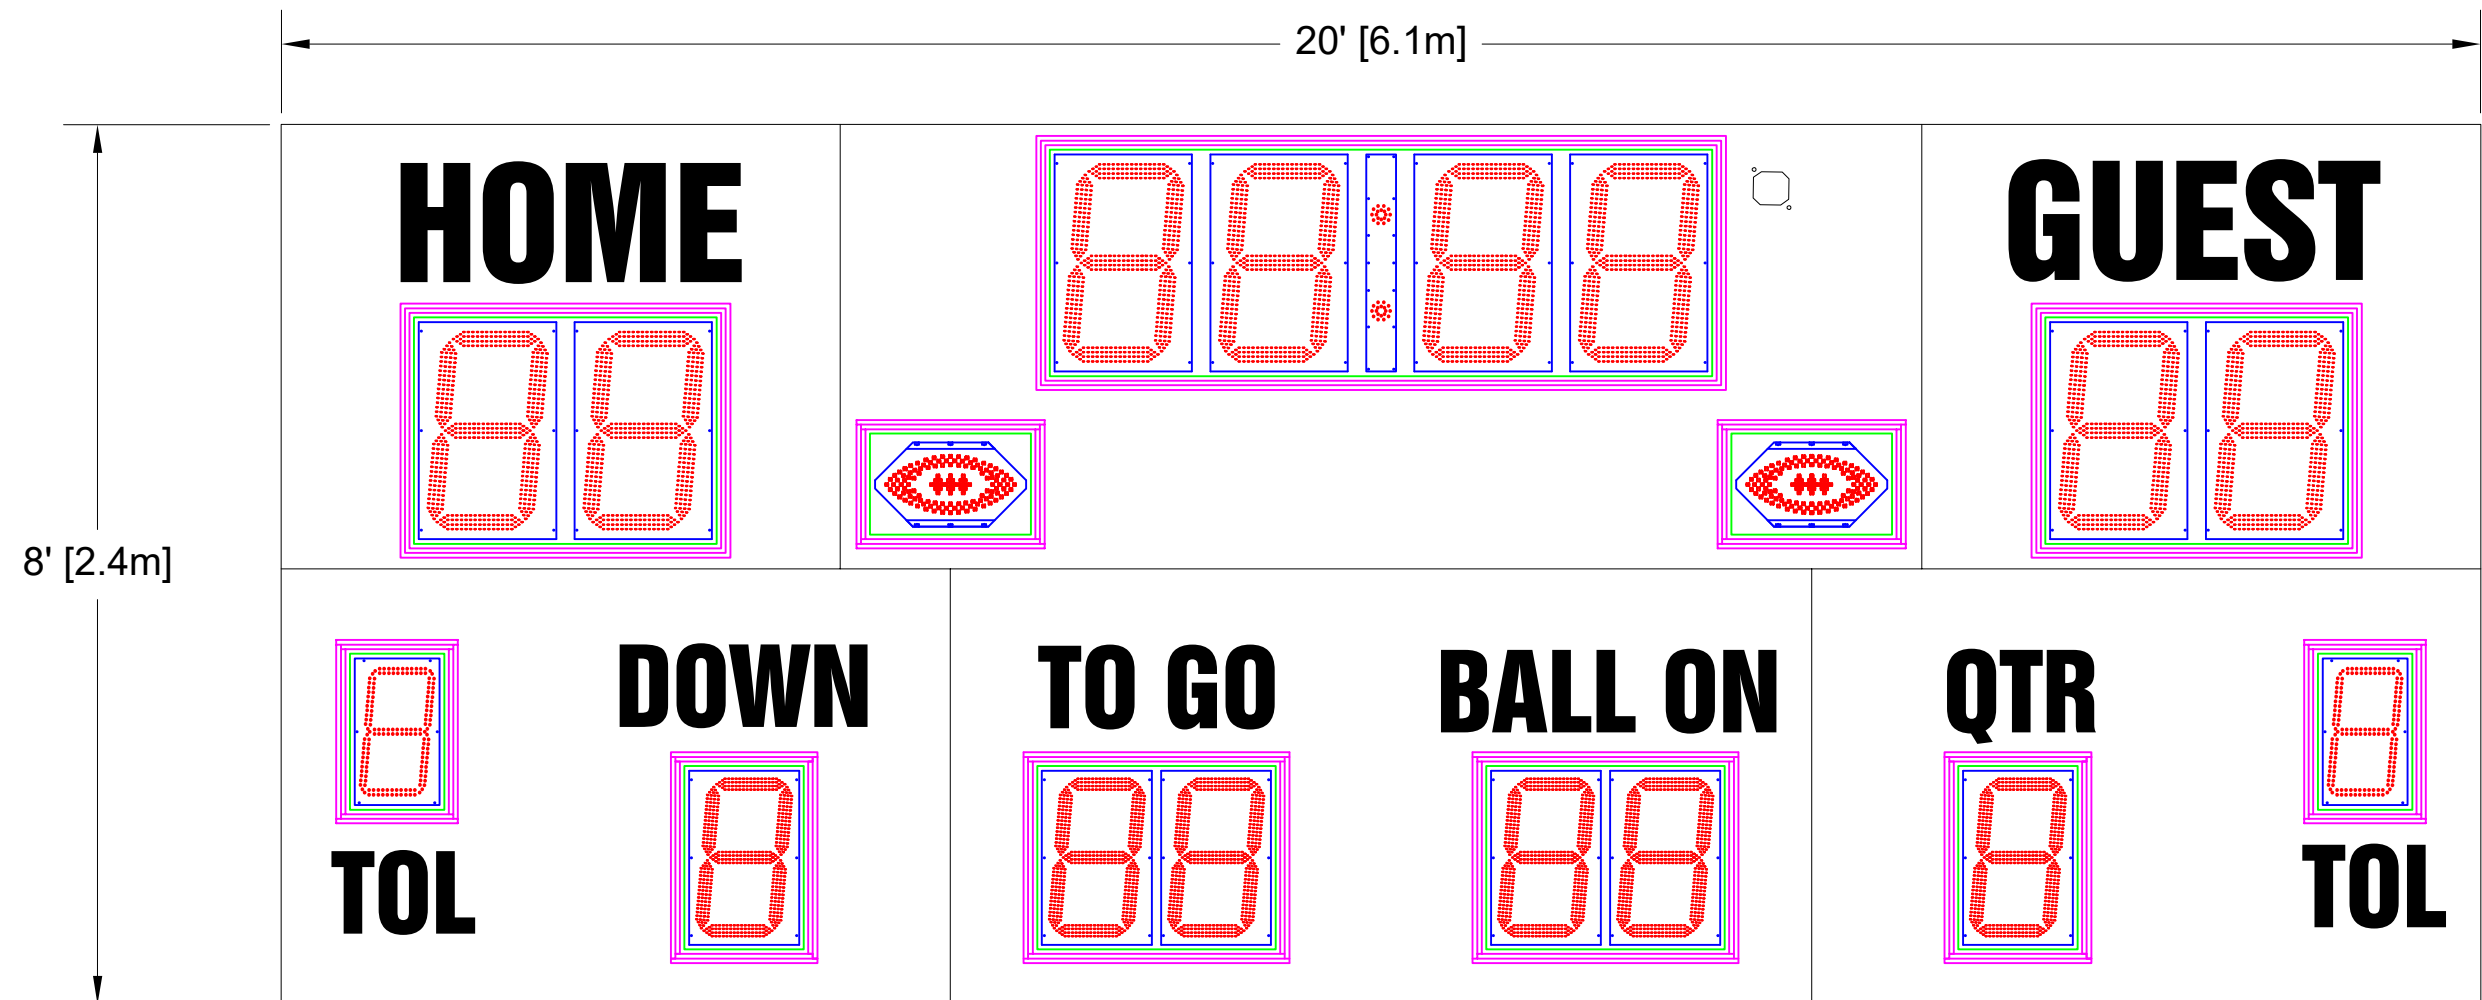



Scoreboard Specifications


Overall size: 20' (W) x 8' (H) x 6" (D)
Approximate Weight: 789 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 8 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

22" LED Digits for HOME, GUEST, TOD
17" LED Digits for DOWN, TO GO, BALL ON, QTR
14" LED Digits for TOL

9" White Vinyl Lettering For TOL, DOWN, TO GO, BALL ON, QTR
13" White Vinyl Lettering For HOME, GUEST

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	4/15/2021
<u>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</u>				4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		DESCRIPTION		OES ELECTRONIC SCOREBOARDS M8020AxCV	
TOLERANCE INFORMATION Dimensions are in Inches		SIZE	FILENAME M8020AUXV	INIT DRAWING DATE 4/15/21	REV A
Third Angle Projections 		A	USAGE USE FOR REVIEW		
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		SCALE		NTS	DRAWN BY CGTHOMPSON
				PAGE	1 OF 1

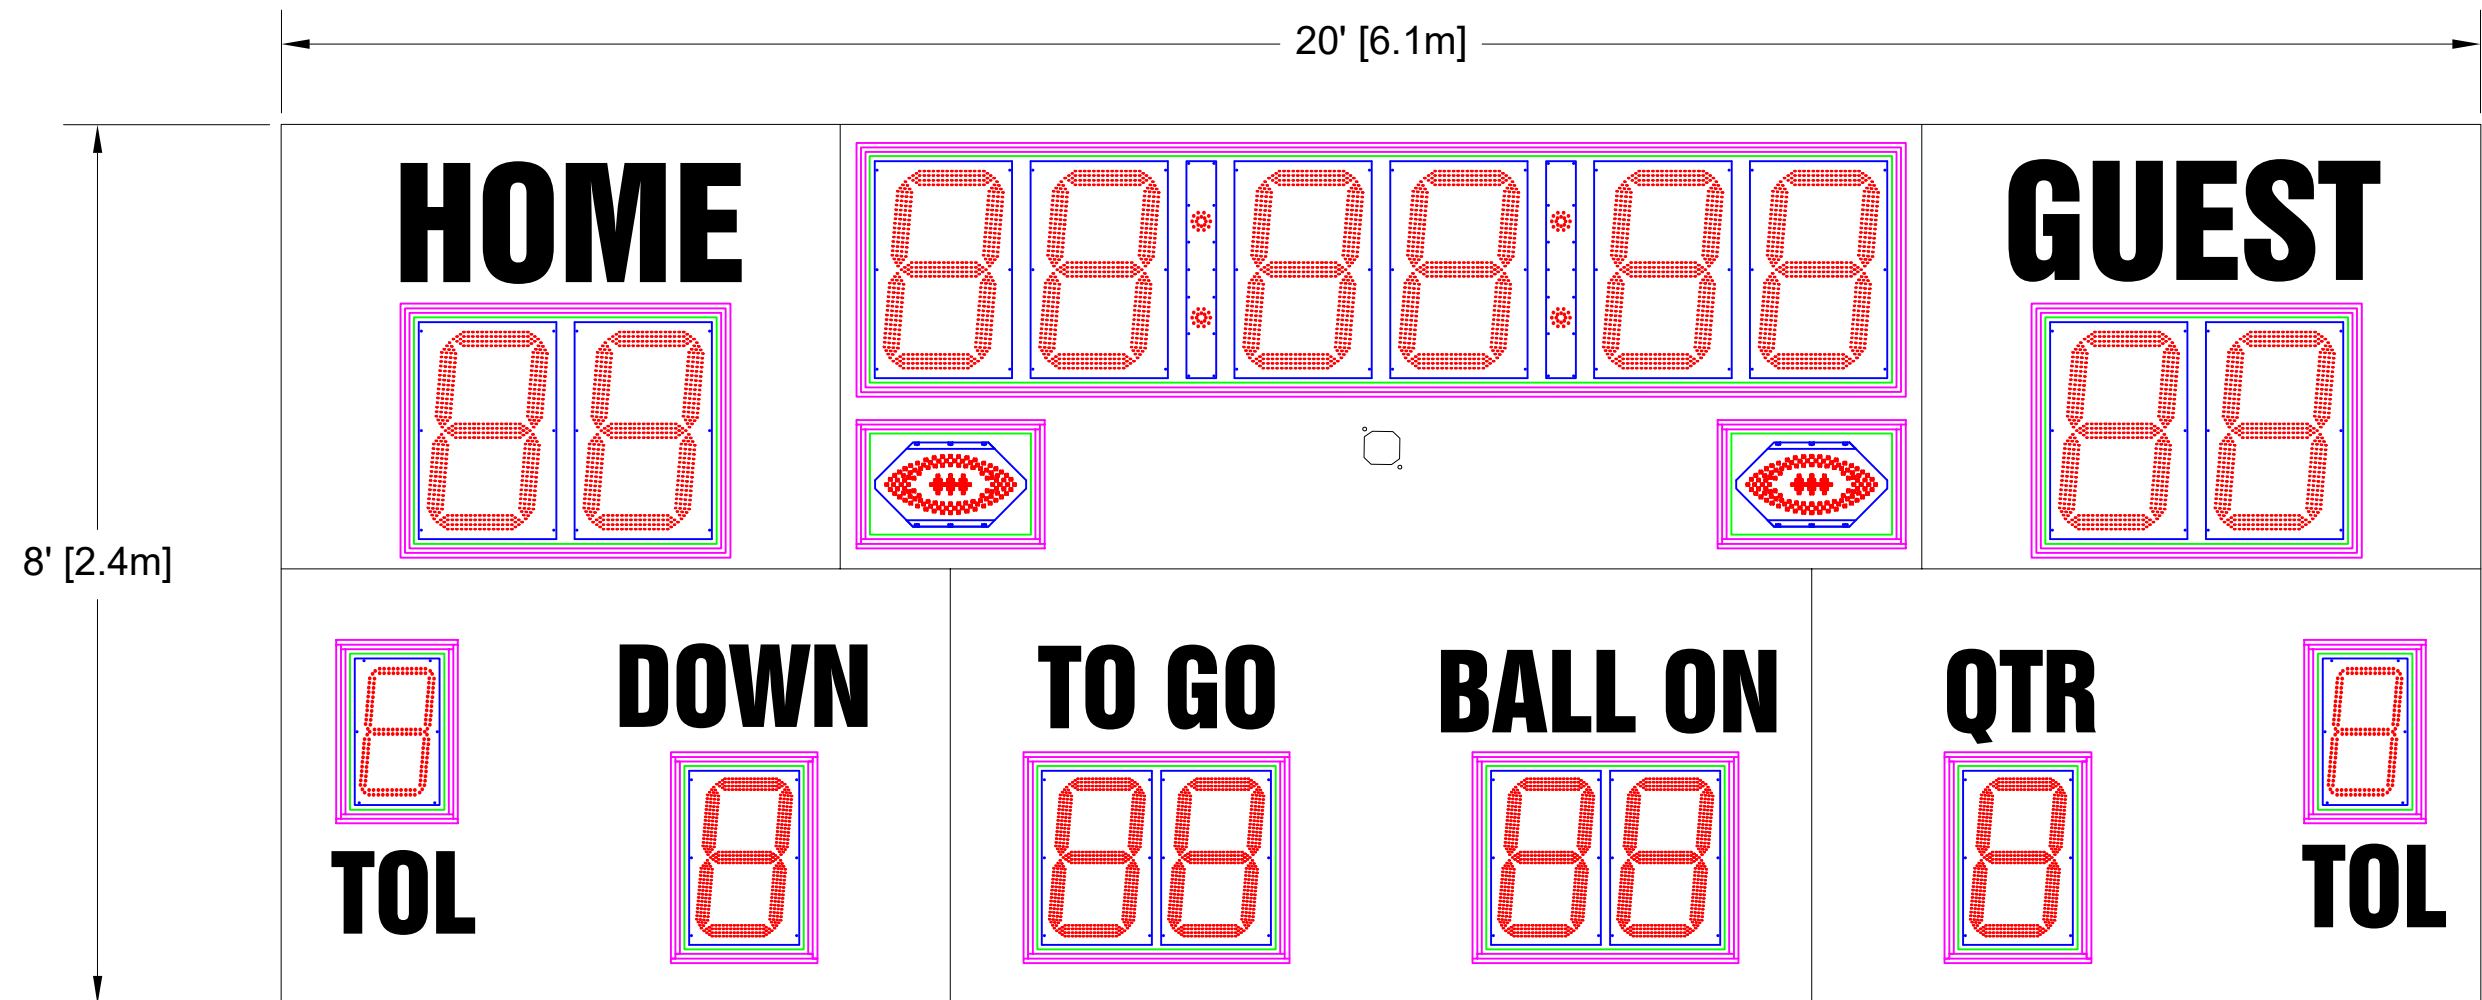

Scoreboard Specifications
Overall size: 20' (W) x 8' (H) x 6" (D)
Approximate Weight: 810 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

22" LED Digits for HOME, GUEST, TOD
17" LED Digits for DOWN, TO GO, BALL ON, QTR
14" LED Digits for TOL

9" White Vinyl Lettering For TOL, DOWN, TO GO, BALL ON, QTR
13" White Vinyl Lettering For HOME, GUEST

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle


REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/5/2021

		<div><div></div><div>OES SCOREBOARDS</div></div> <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
		DESCRIPTION OES ELECTRONIC SCOREBOARDS M8020AxCV-H	
SIZE	FILENAME M8020AUXV-H	INIT DRAWING DATE 5/5/21	REV A
A	USAGE USE FOR REVIEW		
SCALE NTS		DRAWN BY CGTHOMPSON	PAGE 1 OF 1

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION
Dimensions are in Inches
Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

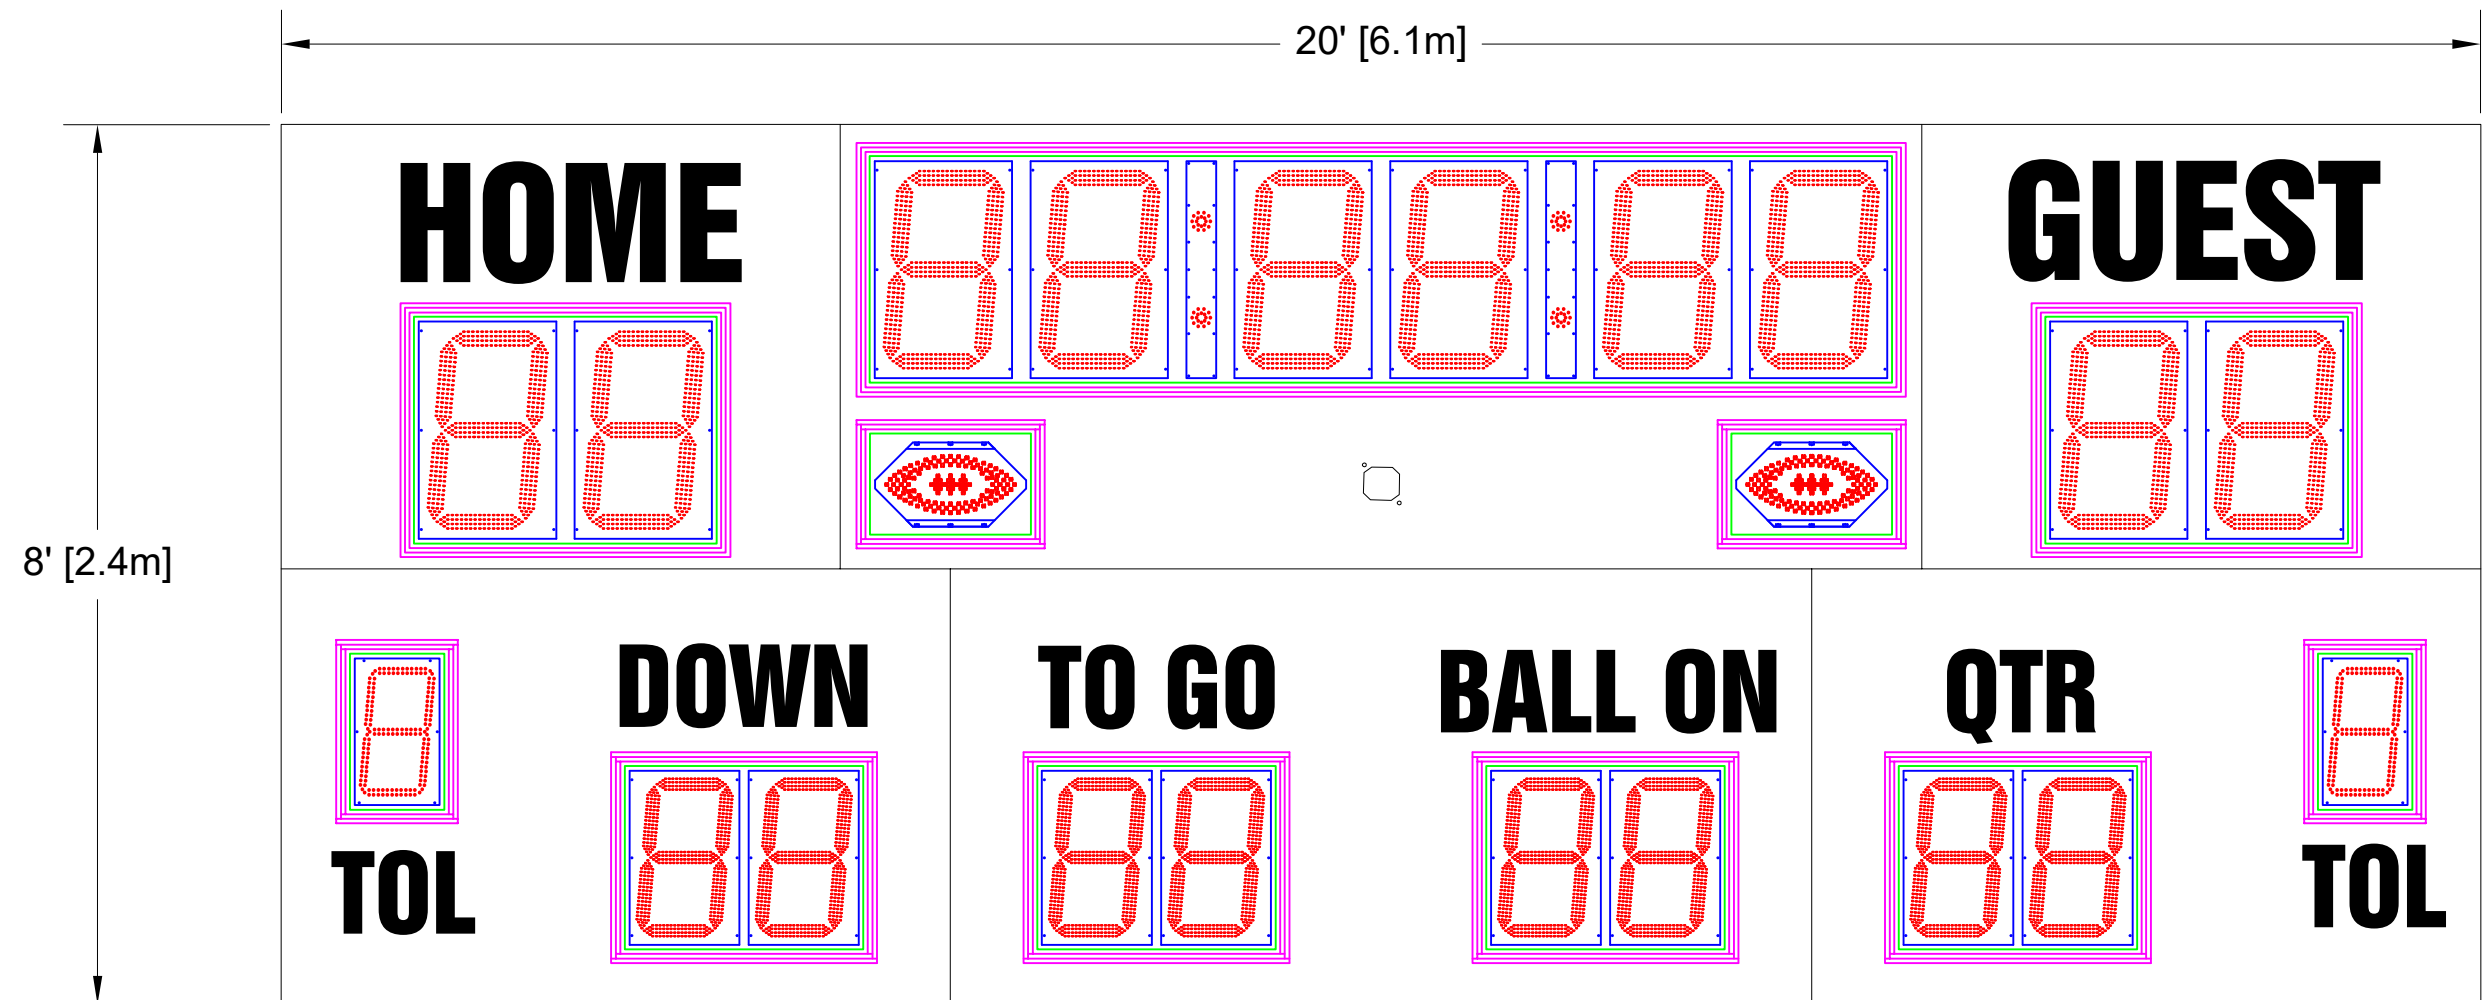



Scoreboard Specifications
Overall size: 20' (W) x 8' (H) x 6" (D)
Approximate Weight: 822 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


22" LED Digits for HOME, GUEST, TOD
17" LED Digits for DOWN, TO GO, BALL ON, QTR
14" LED Digits for TOL

9" White Vinyl Lettering For TOL, DOWN, TO GO, BALL ON, QTR
13" White Vinyl Lettering For HOME, GUEST

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION	AUTHOR	DATE
A		INITIAL DESIGN	OES	2/28/2020

			4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
<u>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</u>		DESCRIPTION		
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		OES ELECTRONIC SCOREBOARDS		
		M8020AxCV-HF		
TOLERANCE INFORMATION Dimensions are in Inches		SIZE	FILENAME	INIT DRAWING DATE
		A	M8020AUXV-HF	2/28/20
		USAGE		
		USE FOR REVIEW		
		SCALE	NTS	DRAWN BY
		CGTHOMPSON		PAGE 1 OF 1

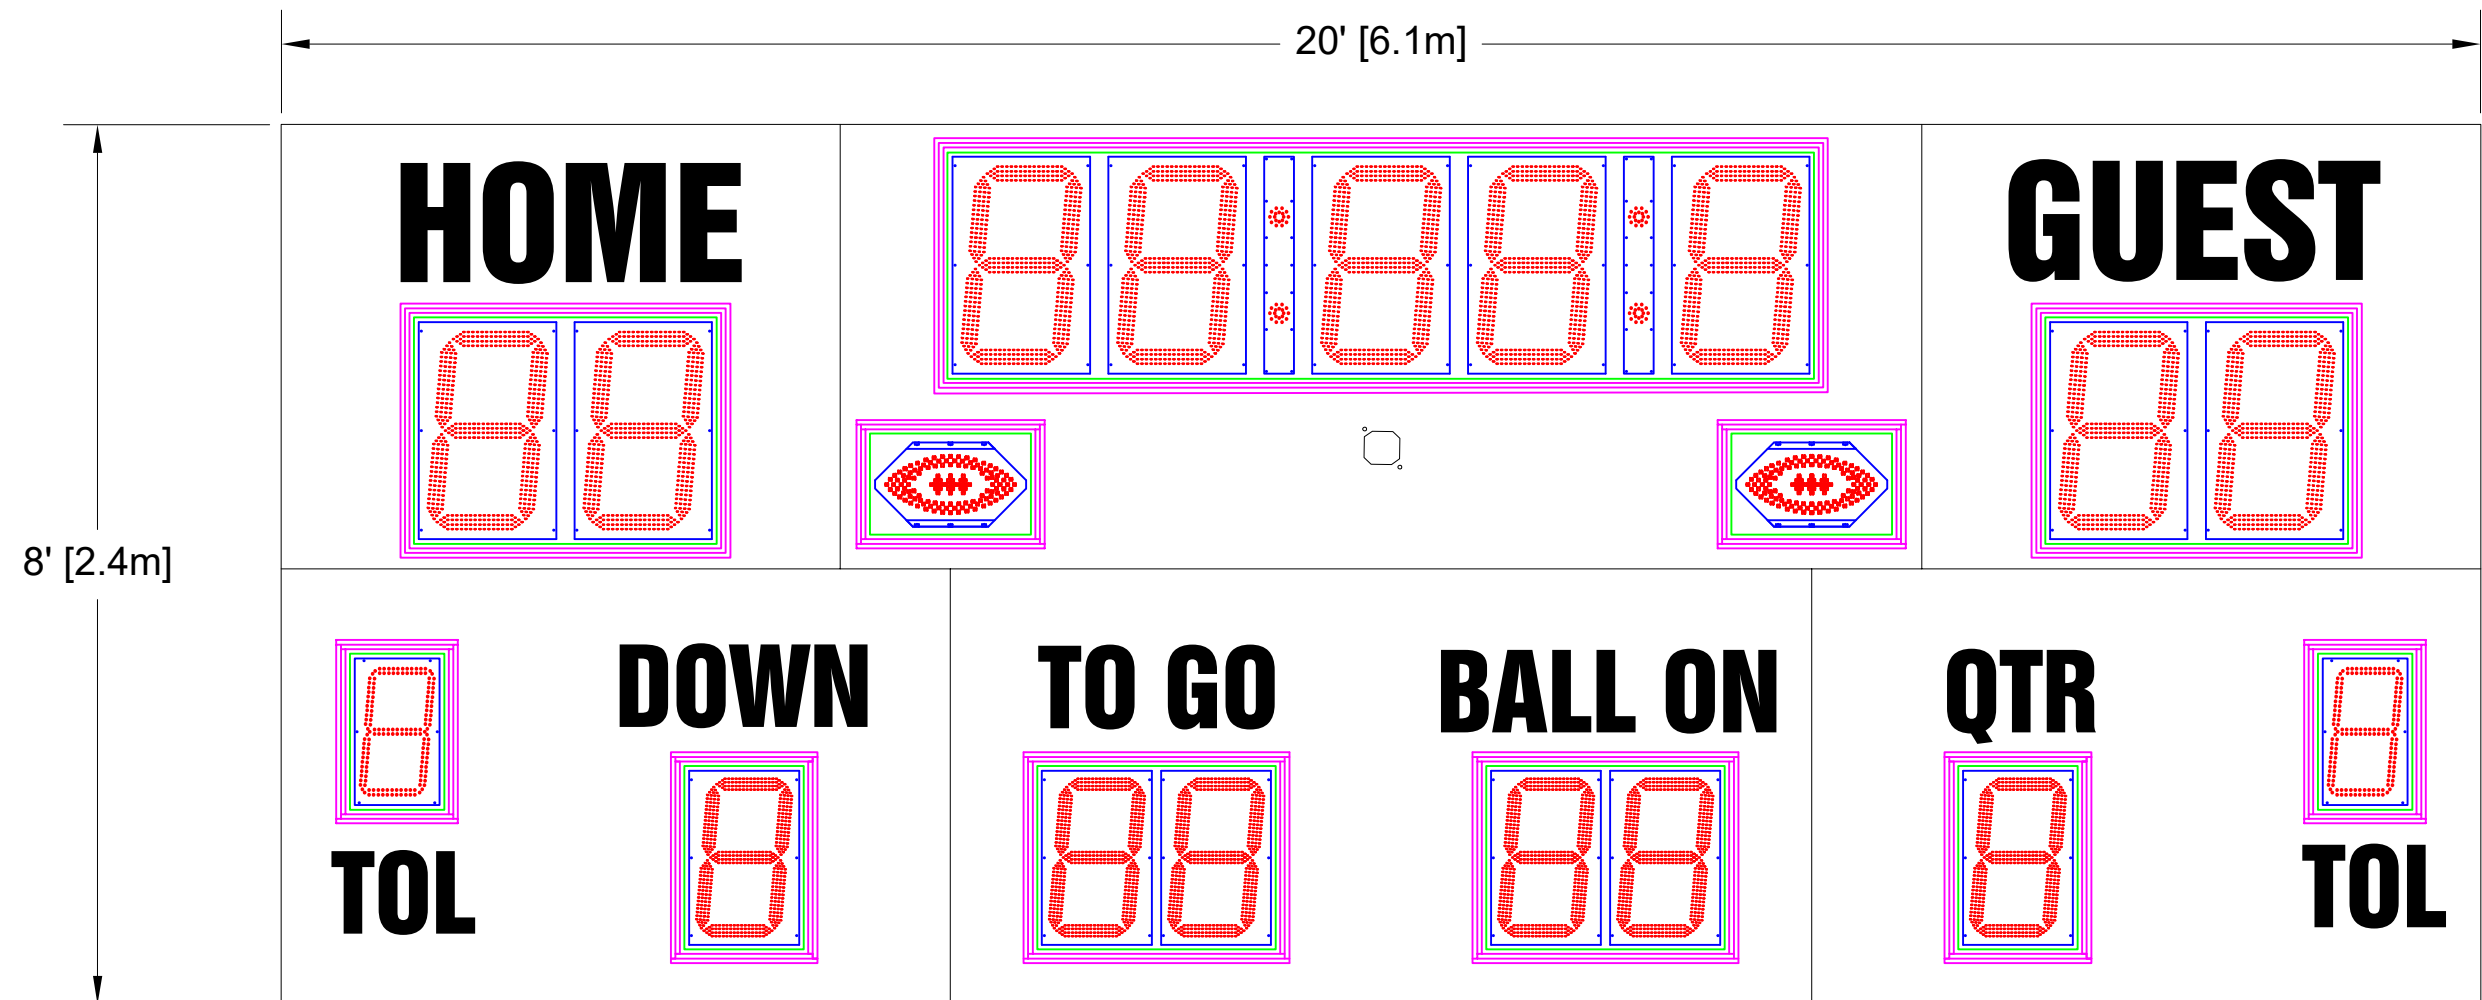

Scoreboard Specifications


Overall size: 20' (W) x 8' (H) x 6" (D)
Approximate Weight: 801 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

22" LED Digits for HOME, GUEST, TOD
17" LED Digits for DOWN, TO GO, BALL ON, QTR
14" LED Digits for TOL

9" White Vinyl Lettering For TOL, DOWN, TO GO, BALL ON, QTR
13" White Vinyl Lettering For HOME, GUEST

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/5/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:			
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.			
TOLERANCE INFORMATION Dimensions are in Inches			
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°			
THIRD ANGLE PROJECTIONS			
DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M8020AxCV-T			
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8020AUXV-T	5/5/21	A
USAGE			
USE FOR REVIEW			
SCALE	NTS	DRAWN BY	PAGE
		CGTHOMPSON	1 OF 1

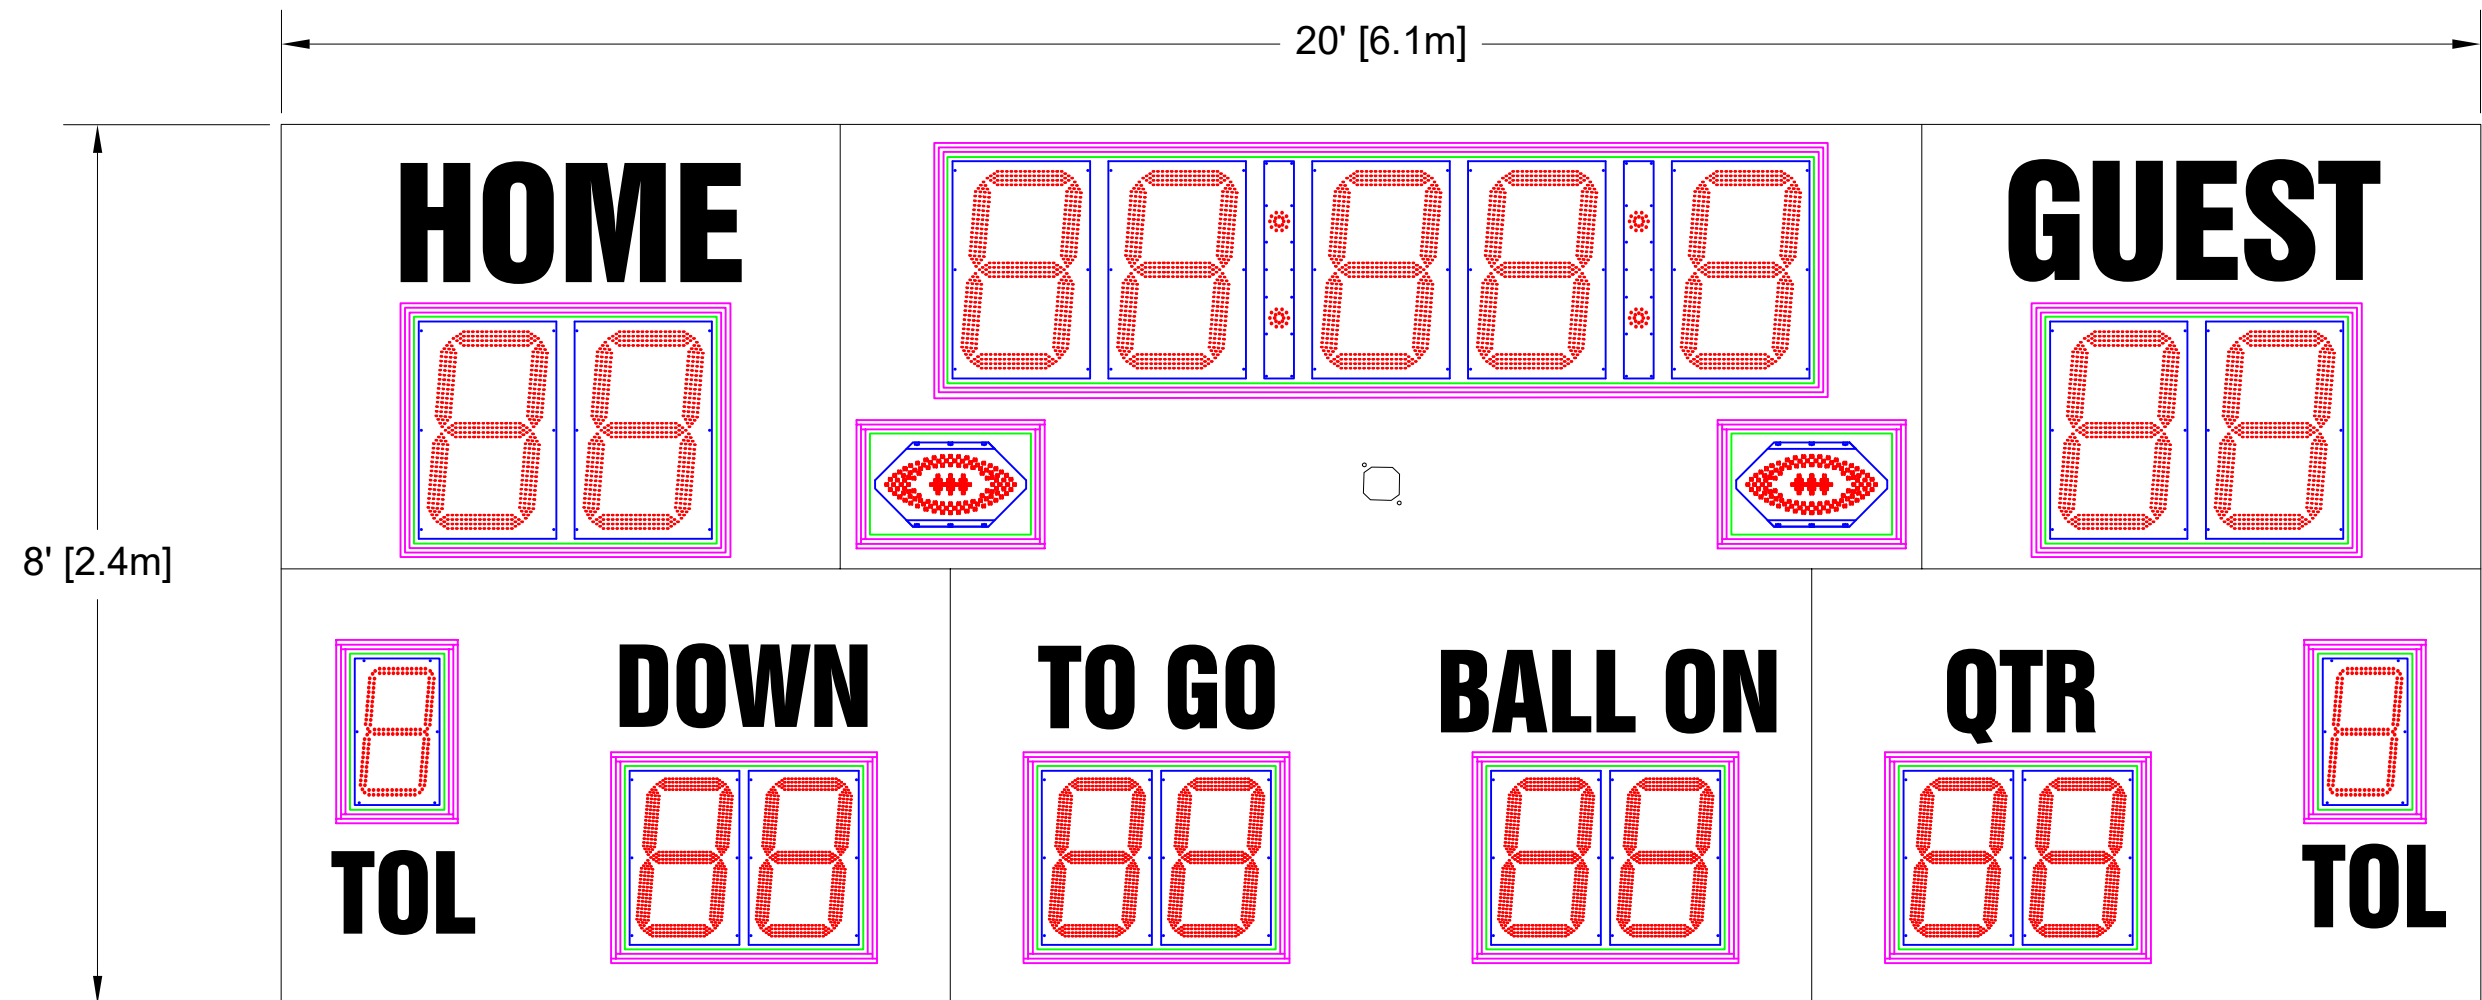

Scoreboard Specifications

Overall size: 20' (W) x 8' (H) x 6" (D)
Approximate Weight: 813 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

22" LED Digits for HOME, GUEST, TOD
17" LED Digits for DOWN, TO GO, BALL ON, QTR
14" LED Digits for TOL

9" White Vinyl Lettering For TOL, DOWN, TO GO, BALL ON, QTR
13" White Vinyl Lettering For HOME, GUEST

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/5/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8020AxCV-TF		SIZE A	REV A
FILENAME M8020AUXV-TF		INIT DRAWING DATE 5/5/21	USAGE USE FOR REVIEW
SCALE NTS		DRAWN BY CGTHOMPSON	PAGE 1 OF 1