

**Scoreboard Specifications**

Overall size: 18' (W) x 8' (H) x 6" (D)  
Approximate Weight: 812 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


22" LED Digits for HOME, GUEST, TOD  
17" LED Digits for DOWN, TO GO, BALL ON, QTR  
14" LED Digits for TOL

10" Electronic Team Names of 8 characters

11" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR  
9" White Vinyl Lettering for TOL

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/6/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:			
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.			
TOLERANCE INFORMATION Dimensions are in Inches			
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°			
THIRD ANGLE PROJECTIONS			
DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M8018AxCE			
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8018AUXE	5/6/21	A
USAGE			
USE FOR REVIEW			
SCALE	NTS	DRAWN BY	PAGE
		CGTHOMPSON	1 OF 1

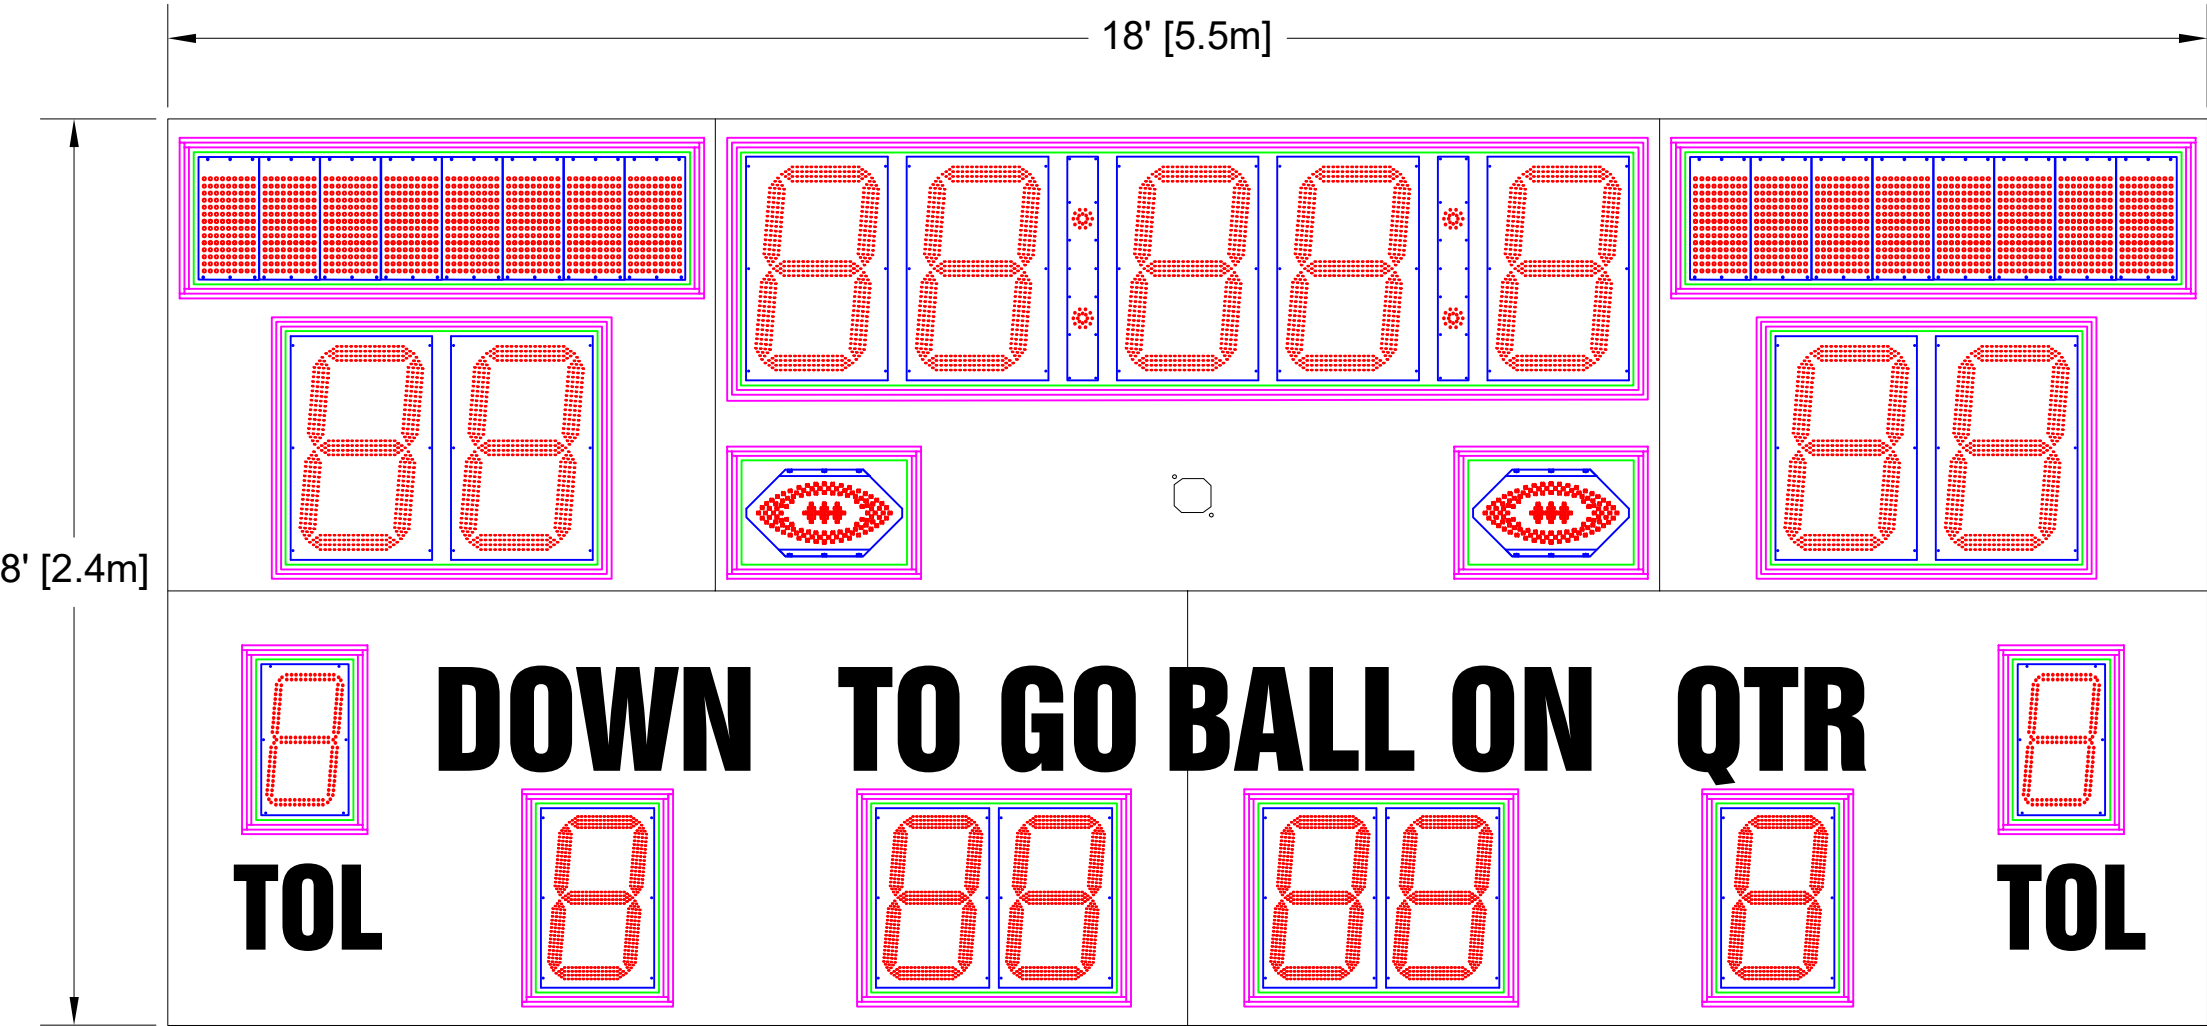

**Scoreboard Specifications**

Overall size: 18' (W) x 8' (H) x 6" (D)  
Approximate Weight: 822 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

22" LED Digits for HOME, GUEST, TOD  
17" LED Digits for DOWN, TO GO, BALL ON, QTR  
14" LED Digits for TOL

10" Electronic Team Names of 8 characters


11" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR  
9" White Vinyl Lettering for TOL

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/6/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8018AxCE-T		SIZE A	REV A
FILENAME M8018AUXE-T		INIT DRAWING DATE 5/6/21	
USAGE USE FOR REVIEW		SCALE NTS	PAGE 1 OF 1
DRAWN BY CGTHOMPSON			





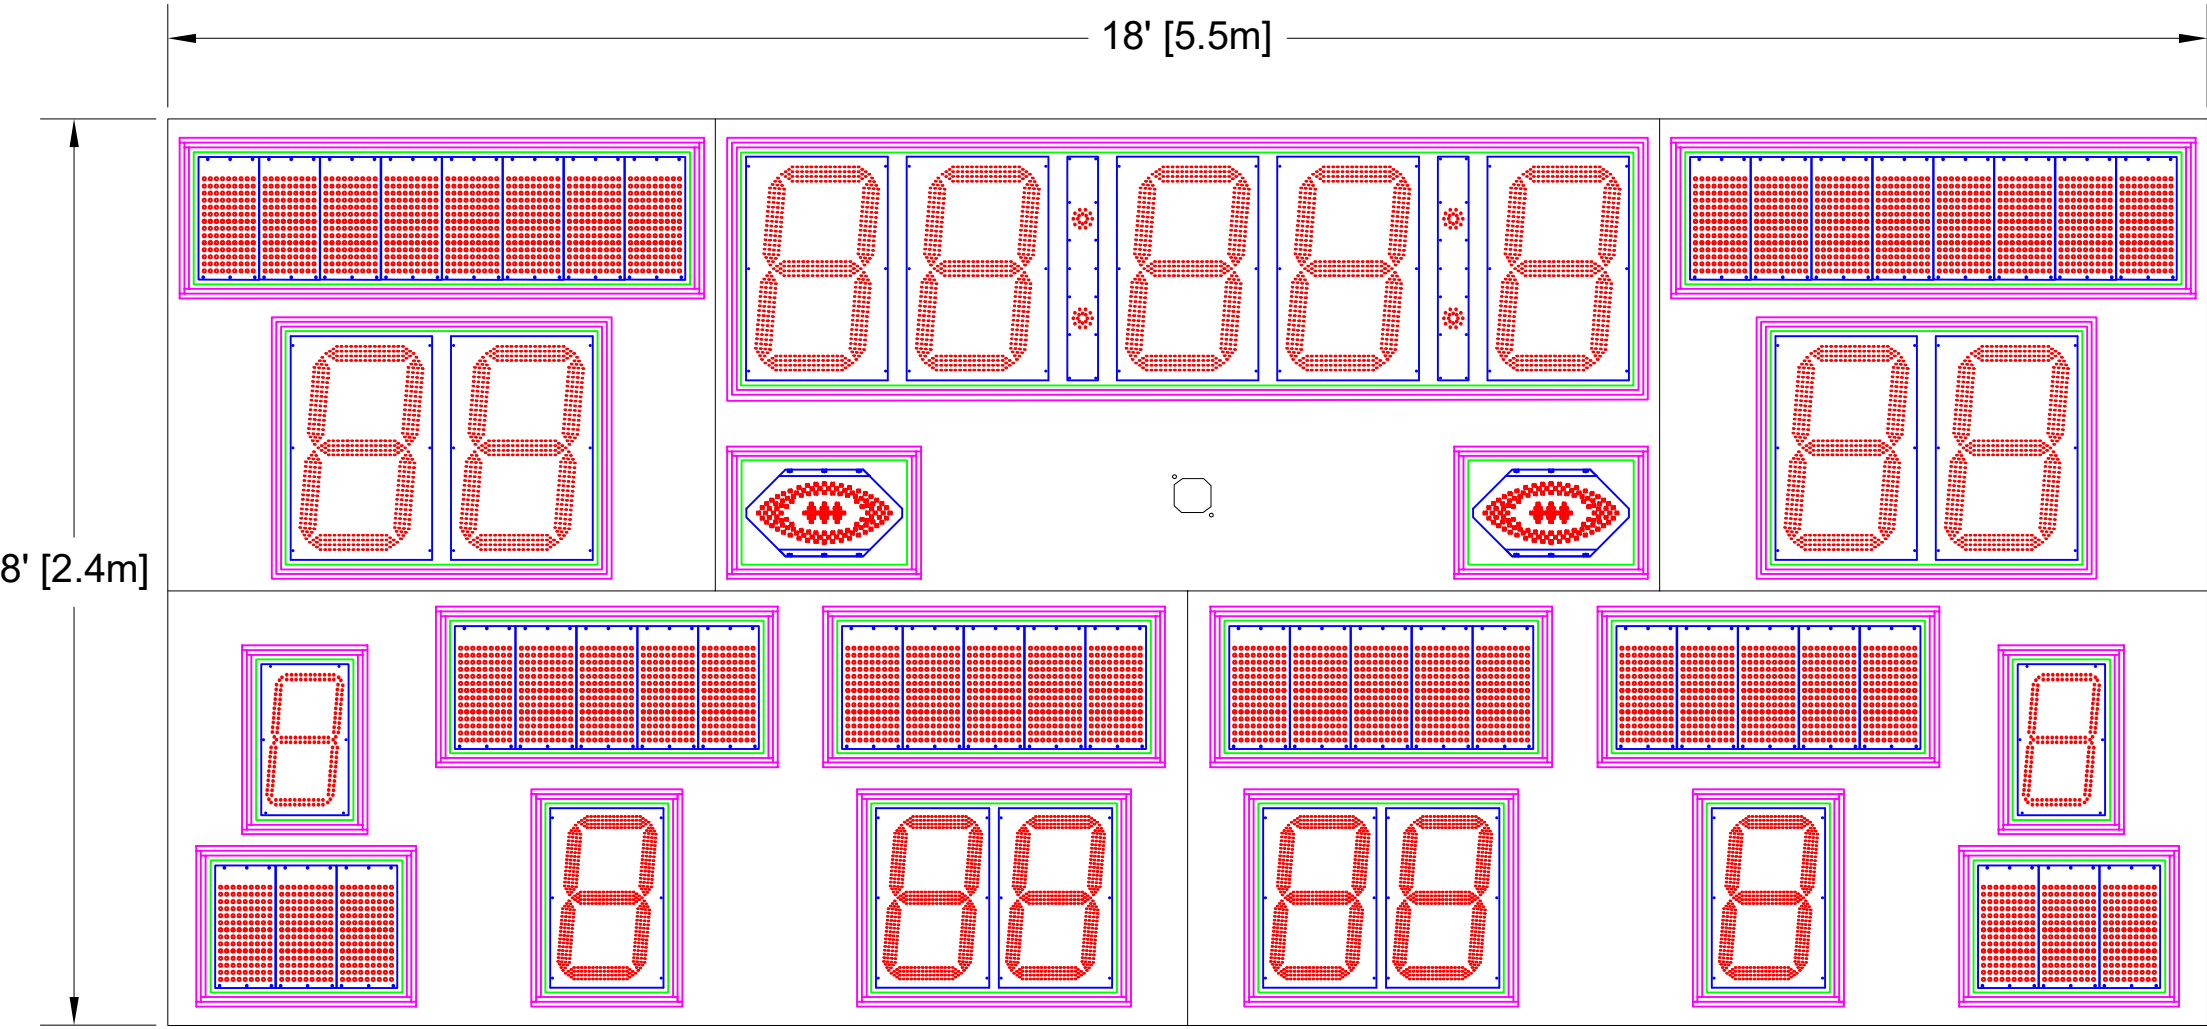

**Scoreboard Specifications**

Overall size: 18' (W) x 8' (H) x 6" (D)  
Approximate Weight: 880 lbs  
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


22" LED Digits for HOME, GUEST, TOD  
17" LED Digits for DOWN, TO GO, BALL ON, QTR  
14" LED Digits for TOL

10" Electronic Team Names of 8 characters  
10" Electronic Captions of 5 characters  
10" Electronic Captions of 3 characters

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/6/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:  OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		TOLERANCE INFORMATION Dimensions are in Inches  Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°	
THIRD ANGLE PROJECTIONS		OES SCOREBOARDS	
DESCRIPTION  OES ELECTRONIC SCOREBOARDS M8018AxCH-T		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
SIZE A	FILENAME M8018AUXH-T	INIT DRAWING DATE 5/6/21	REV A
USAGE USE FOR REVIEW			
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	

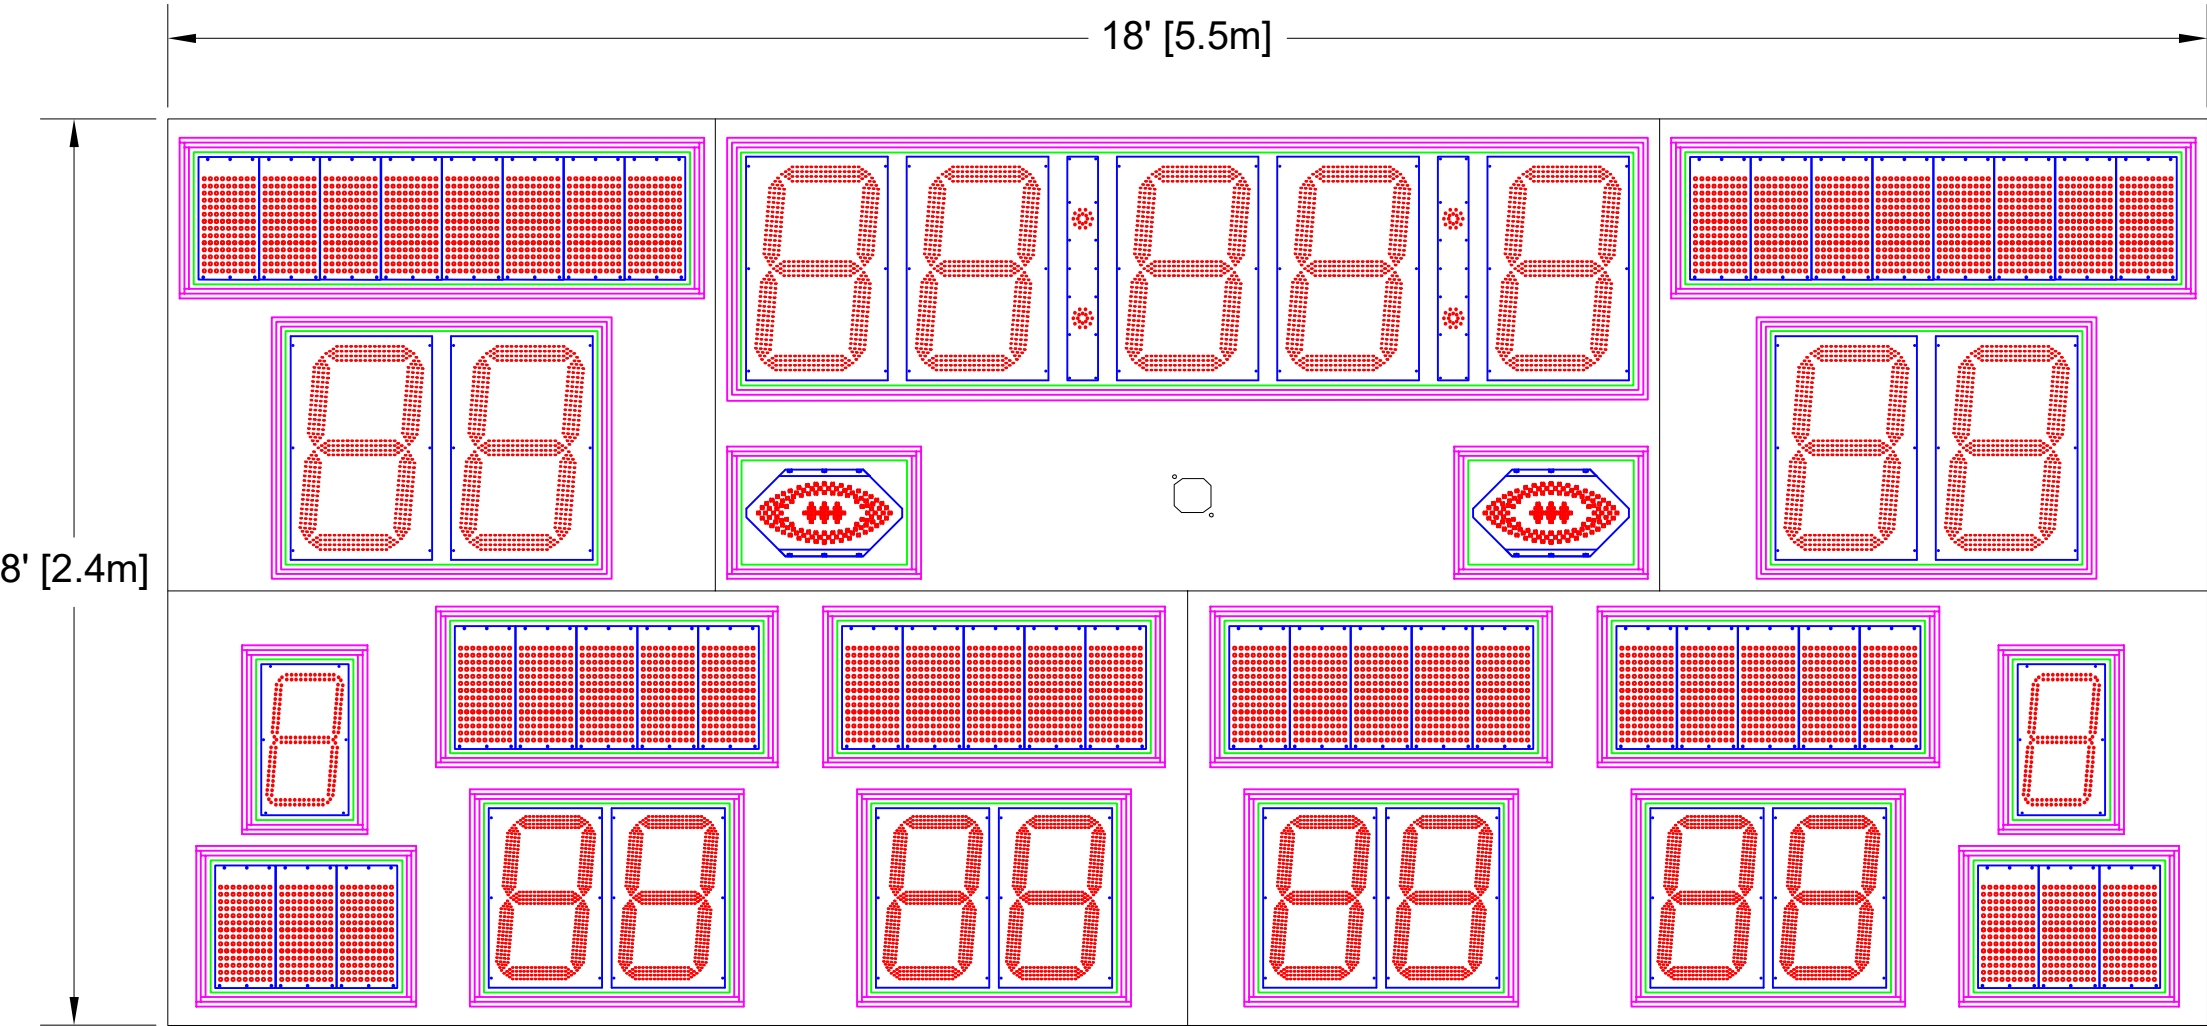

**Scoreboard Specifications**

Overall size: 18' (W) x 8' (H) x 6" (D)  
Approximate Weight: 892 lbs  
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


22" LED Digits for HOME, GUEST, TOD  
17" LED Digits for DOWN, TO GO, BALL ON, QTR  
14" LED Digits for TOL

10" Electronic Team Names of 8 characters  
10" Electronic Captions of 5 characters  
10" Electronic Captions of 3 characters

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	2/6/2020
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8018AxCH-TF		SIZE A	REV A
FILENAME M8018AUXH-TF		INIT DRAWING DATE 2/6/20	
USAGE USE FOR REVIEW			
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	



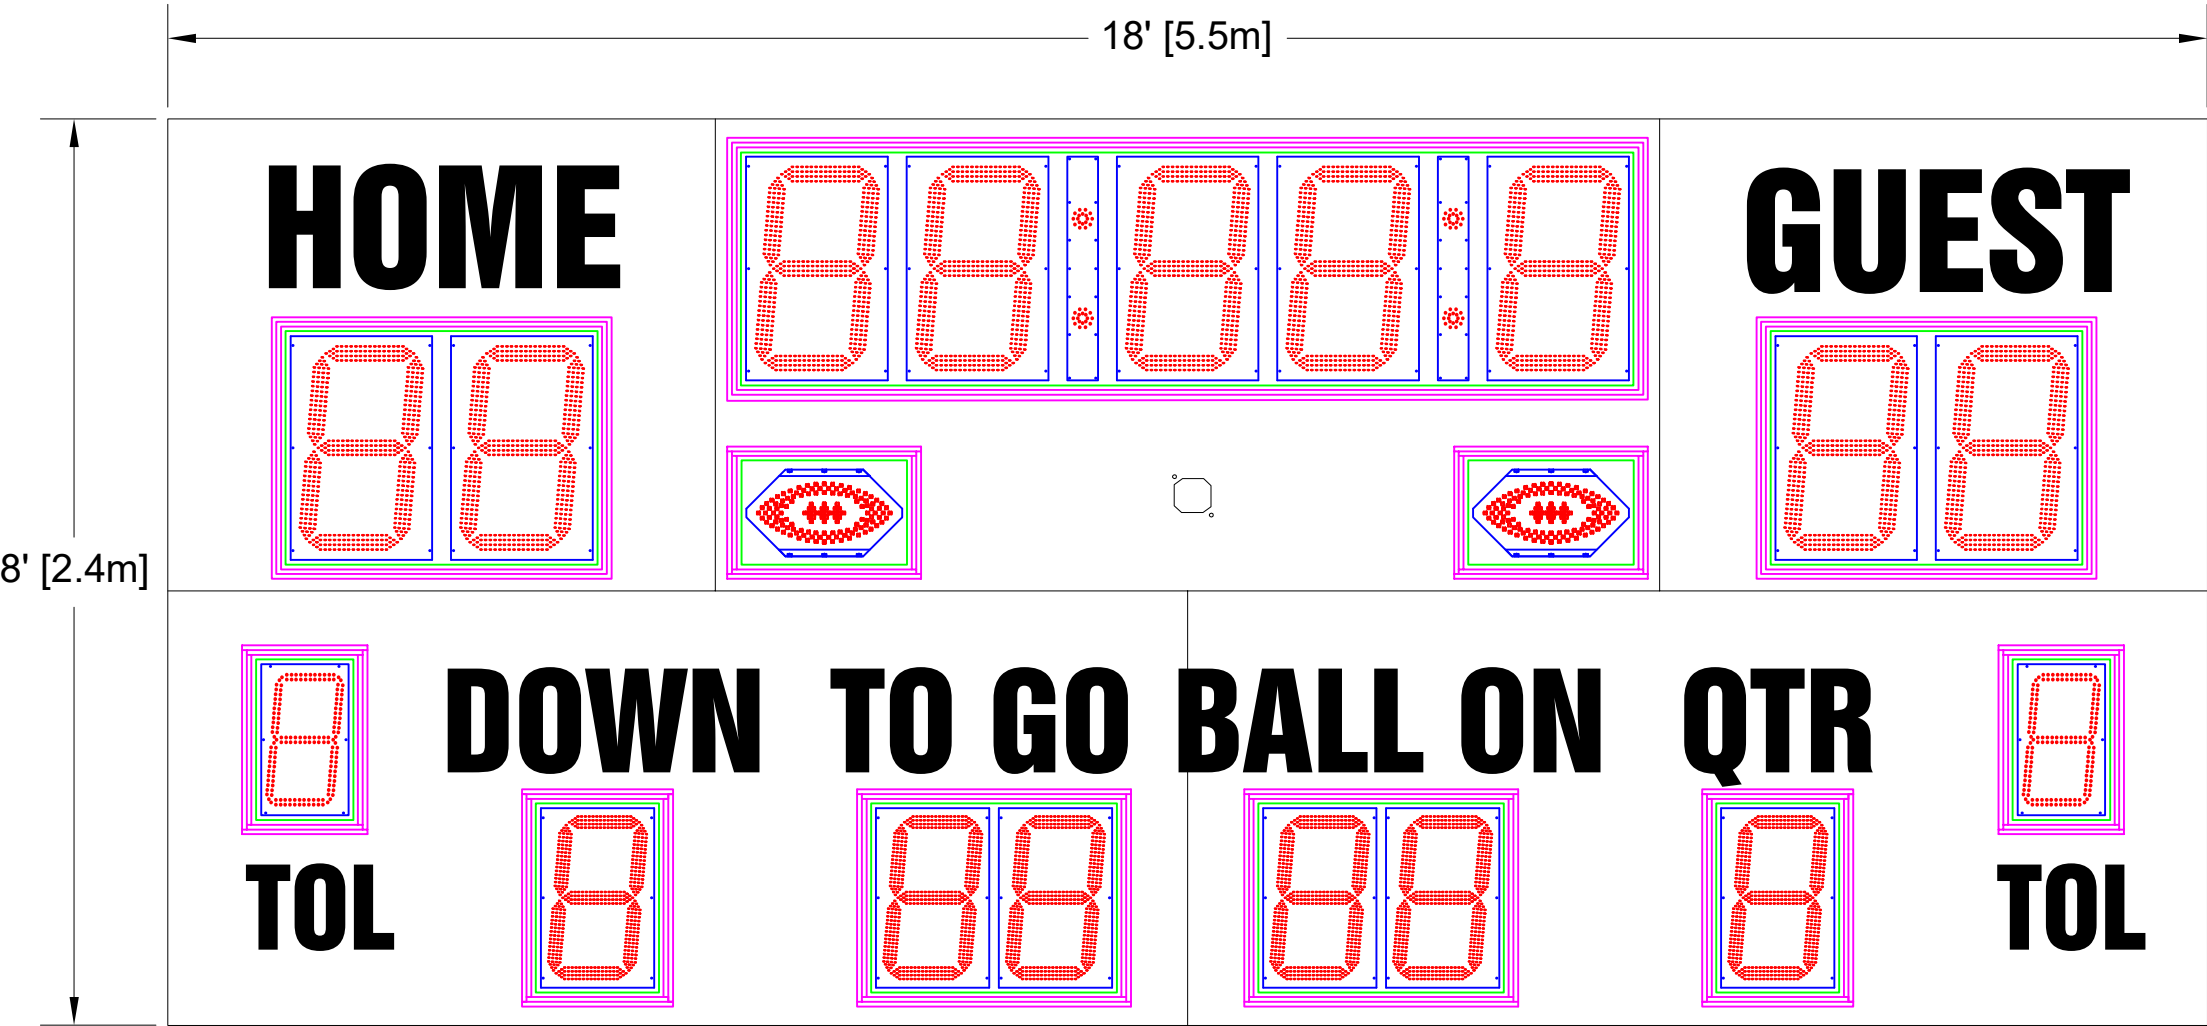

**Scoreboard Specifications**

Overall size: 18' (W) x 8' (H) x 6" (D)  
Approximate Weight: 775 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

22" LED Digits for HOME, GUEST, TOD  
17" LED Digits for DOWN, TO GO, BALL ON, QTR  
14" LED Digits for TOL

13" White Vinyl Lettering for HOME, GUEST  
11" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR  
9" White Vinyl Lettering for TOL

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/6/2021
		<div><div></div><div>OES SCOREBOARDS</div></div> <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
		DESCRIPTION OES ELECTRONIC SCOREBOARDS M8018AxCV-T	
		SIZE A	INIT DRAWING DATE 5/6/21
		FILENAME M8018AUXV-T	REV A
		USAGE USE FOR REVIEW	
		SCALE NTS	PAGE 1 OF 1

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION  
Dimensions are in Inches

Fractional ± 1/16"  
Two Place Decimals ± 0.02"  
Three Place Decimals ± 0.005"  
Four Place Decimals ± 0.0005"  
Angular ± 30°

THIRD ANGLE PROJECTIONS

