

Scoreboard Specifications

Overall size: 8' (W) x 6' (H) x 4" (D)
Approximate Weight: 210 lbs
Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 8 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: TOP of the Scoreboard
MAX Current Draw: 5.6 Amps

14" LED Digits for TIME
10" LED Digits for HOME, GUEST, PERIOD
7" LED Digits for TM FOULS, TOL, PLAYER FOULS
2" LED Dots


5" Electronic Team Names at 8 CHARACTERS


4" White Vinyl Lettering for PERIOD, TM FOULS, TOL, PLAYER FOULS
3" White Vinyl Lettering for P. TO. B


Optional AD space:
LEFT: 24.5" (W) X 24" (H)
RIGHT: 19.5" (W) X 24" (H)

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	7/13/2021

		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		
DESCRIPTION		
OES ELECTRONIC SCOREBOARDS M5008BICE		

TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30'	<div>THIRD ANGLE PROJECTIONS</div> 	SIZE	FILENAME M5008BICE	INIT DRAWING DATE 7/13/21	REV	
		A	USAGE	USE FOR REVIEW		A
		SCALE NTS				DRAWN BY CGTHOMPSON

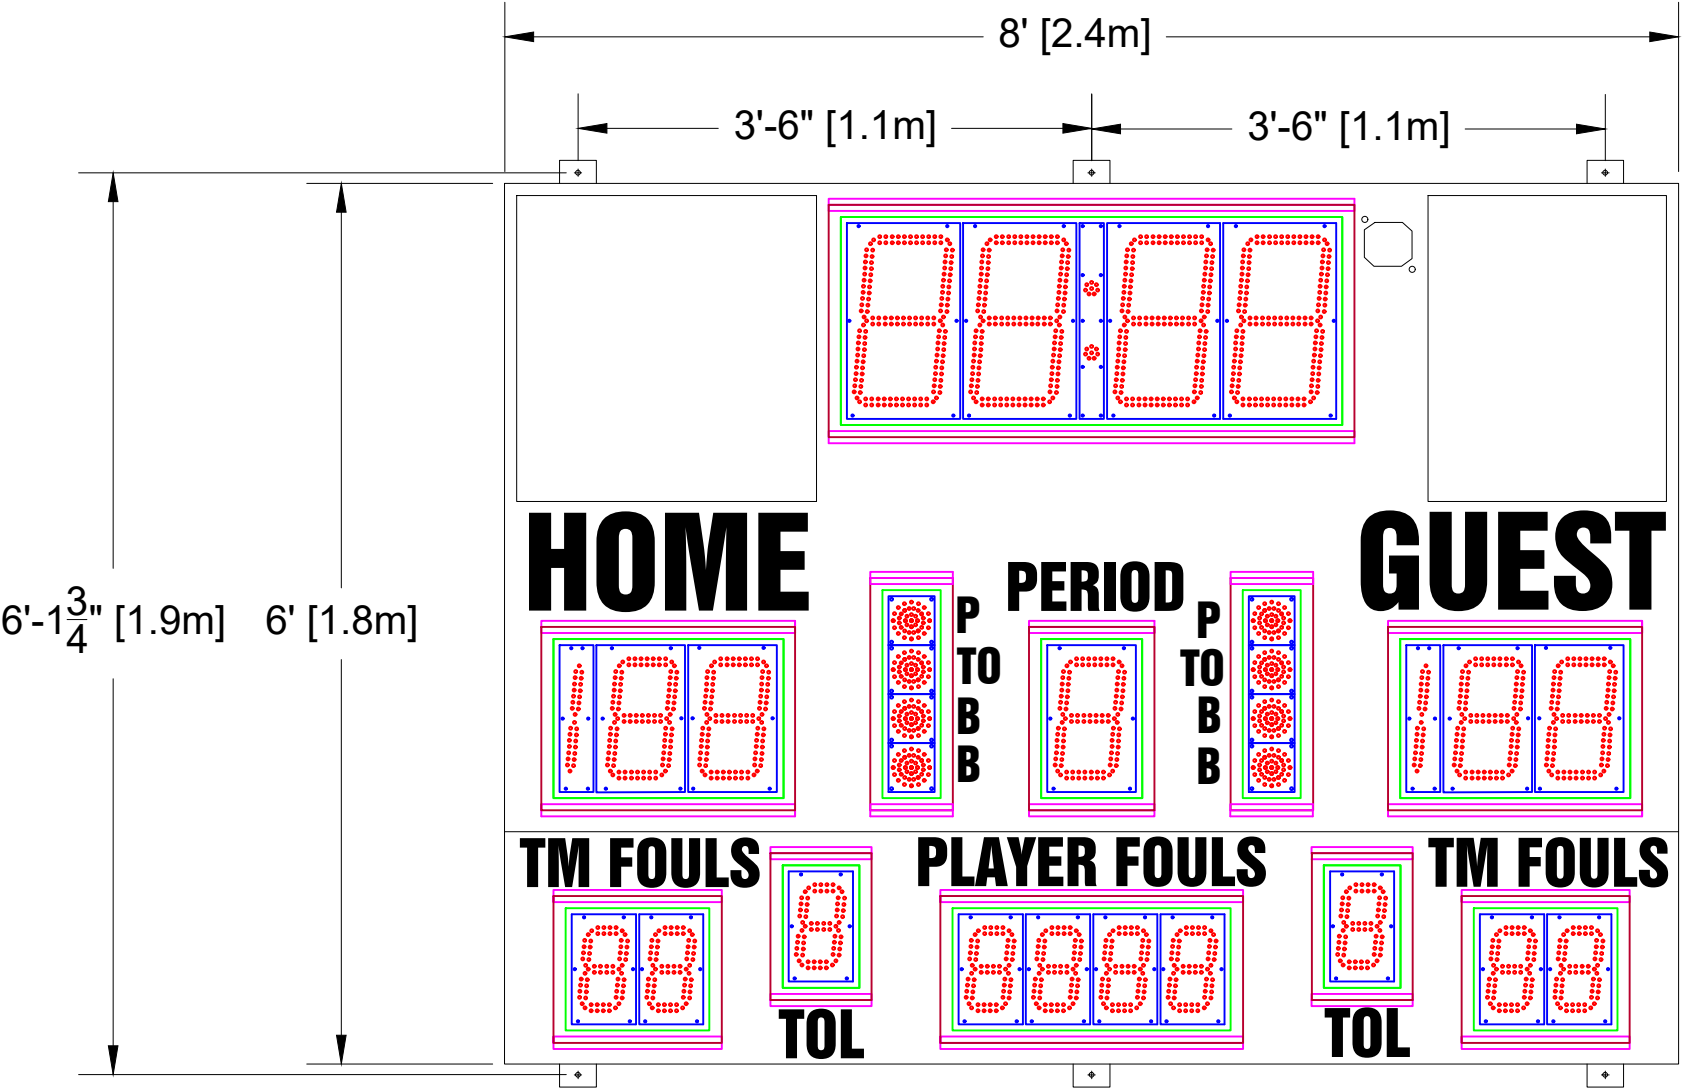

Scoreboard Specifications

Overall size: 8' (W) x 6' (H) x 4" (D)
Approximate Weight: 197 lbs
Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 5 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: TOP of the Scoreboard
MAX Current Draw: 2.9 Amps

14" LED Digits for TIME
10" LED Digits for HOME, GUEST, PERIOD
7" LED Digits for TM FOULS, TOL, PLAYER FOULS
2" LED Dots

8" White Vinyl Lettering for HOME, GUEST
4" White Vinyl Lettering for PERIOD, TM FOULS, TOL, PLAYER FOULS
3" White Vinyl Lettering for P. TO. B

Optional AD space:
LEFT: 24.5" (W) X 25" (H)
RIGHT: 19.5" (W) X 25" (H)

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	7/13/2021
		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
<div><div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div><div>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div></div>		<div><div>DESCRIPTION</div><div>OES ELECTRONIC SCOREBOARDS M5008BICV</div></div>	
<div><div>TOLERANCE INFORMATION Dimensions are in Inches</div><div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div></div>		<div><div>THIRD ANGLE PROJECTIONS</div><div></div></div>	
SIZE A	FILENAME M5008BICV	INIT DRAWING DATE 7/13/21	REV A
USAGE USE FOR REVIEW			
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	