

Scoreboard Specifications

Overall size: 9' (W) x 7'4 1/2" (H) x 4" (D)
Approximate Weight: 260 lbs
AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz.
Requires an earth ground connection.
Incoming Mains Power and Data Location: TOP of the Scoreboard
MAX Current Draw: 5.6 Amps


14" LED Digits for TIME, SCORE
10" LED Digits for PERIOD, TM FOULS, PLAYER FOULS
7" LED Digits for TOL
2" LED Arrows

5" Electronic Team Names at 8 CHARACTERS


4" White Vinyl Lettering for PERIOD, TM FOULS, PLAYER FOULS, MATCH, POINTS
3" White Vinyl Lettering for P, TO, B, TOL

Optional AD Space:
LEFT: 30.5" (W) X 23" (H)
RIGHT: 22" (W) X 23" (H)

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

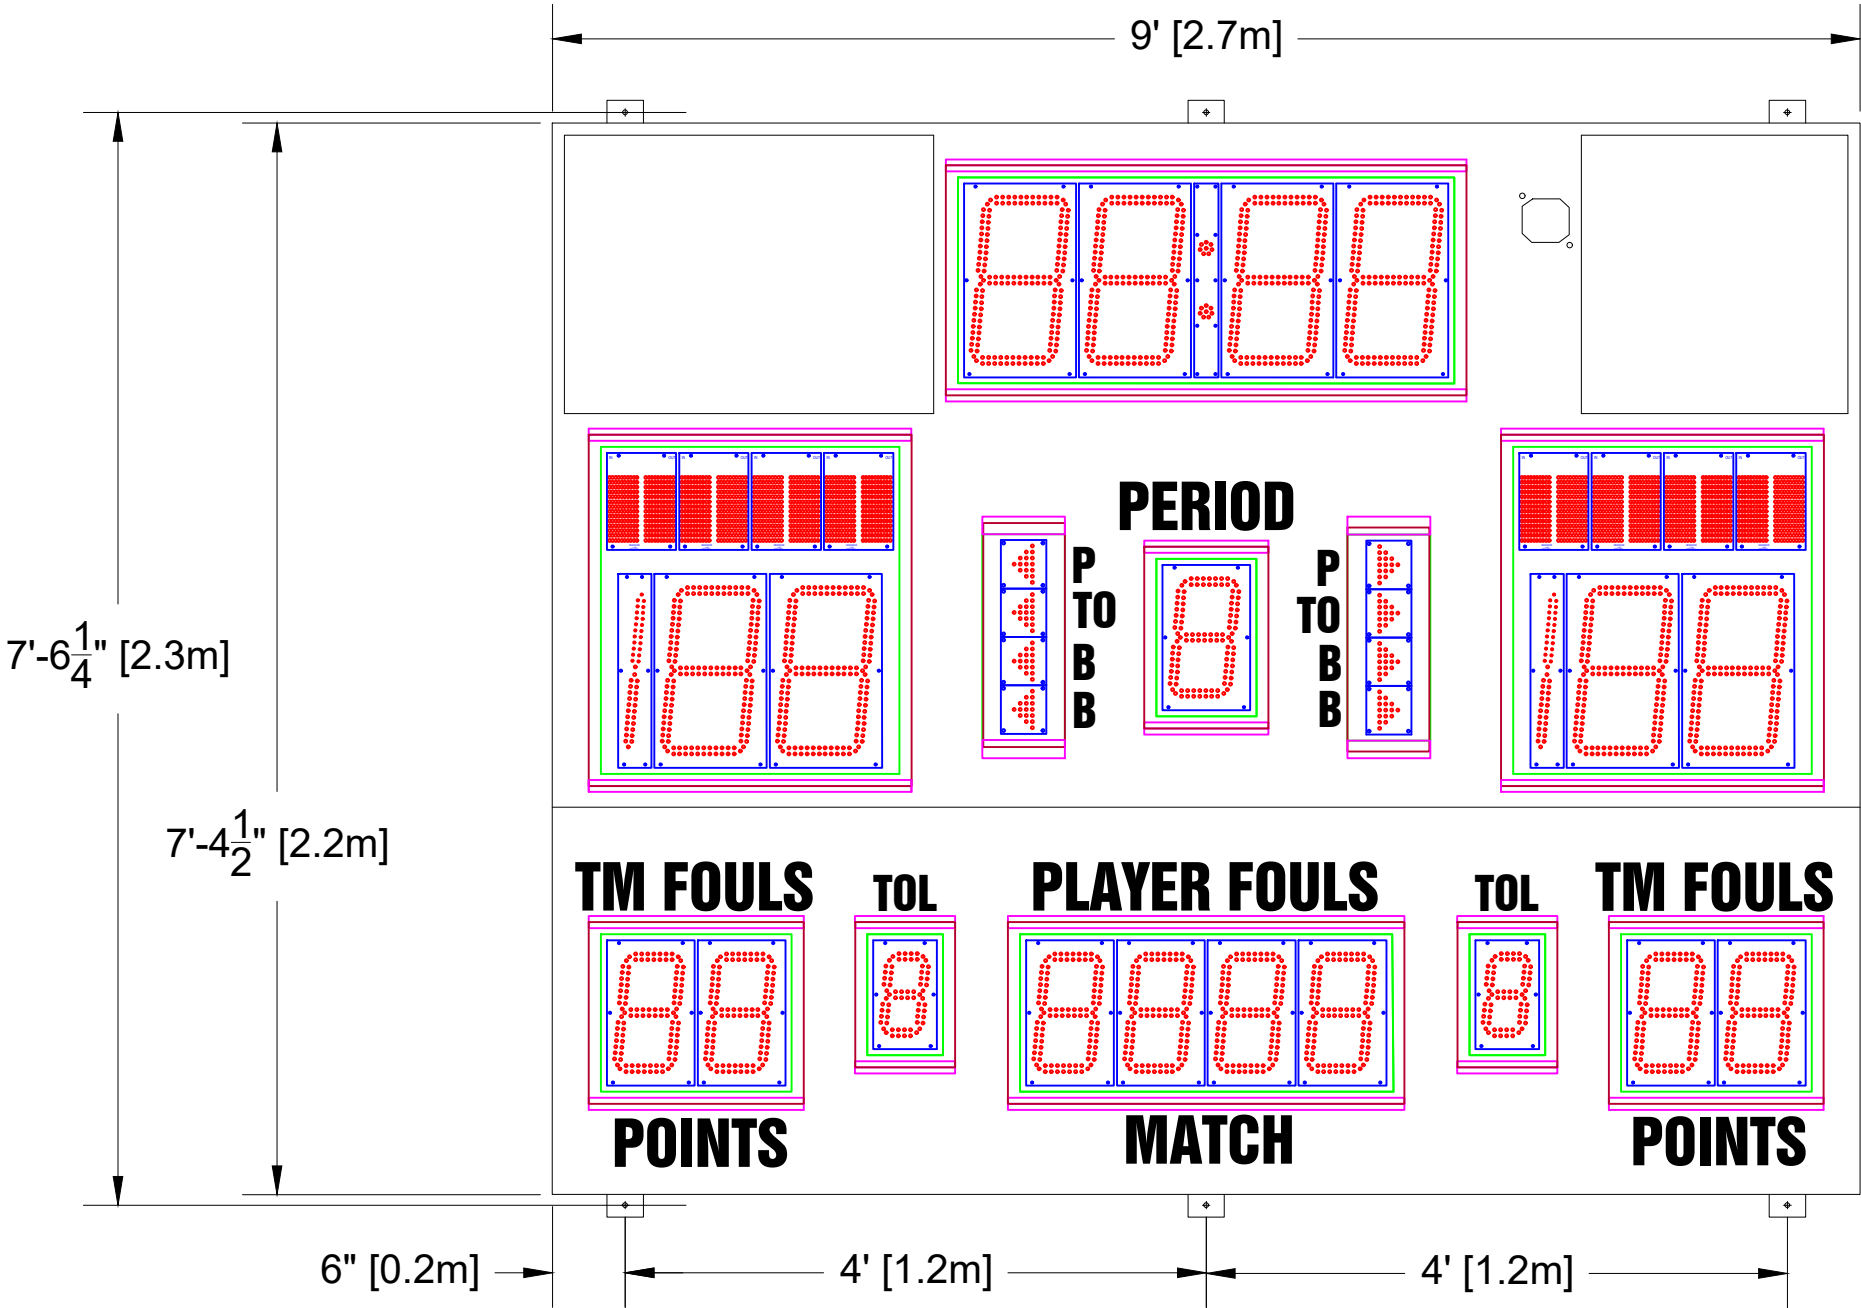

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	7/14/2021
B	ADD AD SPACE DETAILS	OES	7/14/2021
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div><div><div>OES</div><div>SCOREBOARDS</div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M5009CICE</div>		SIZE A	INIT DRAWING DATE 7/14/21
<div>THIRD ANGLE PROJECTIONS</div> <div></div>		FILENAME M5009CICE	REVISION B
<div>USAGE</div> <div>USE FOR REVIEW</div>		<div>SCALE NTS</div> <div>DRAWN BY CGTHOMPSON</div> <div>PAGE 1 OF 1</div>	

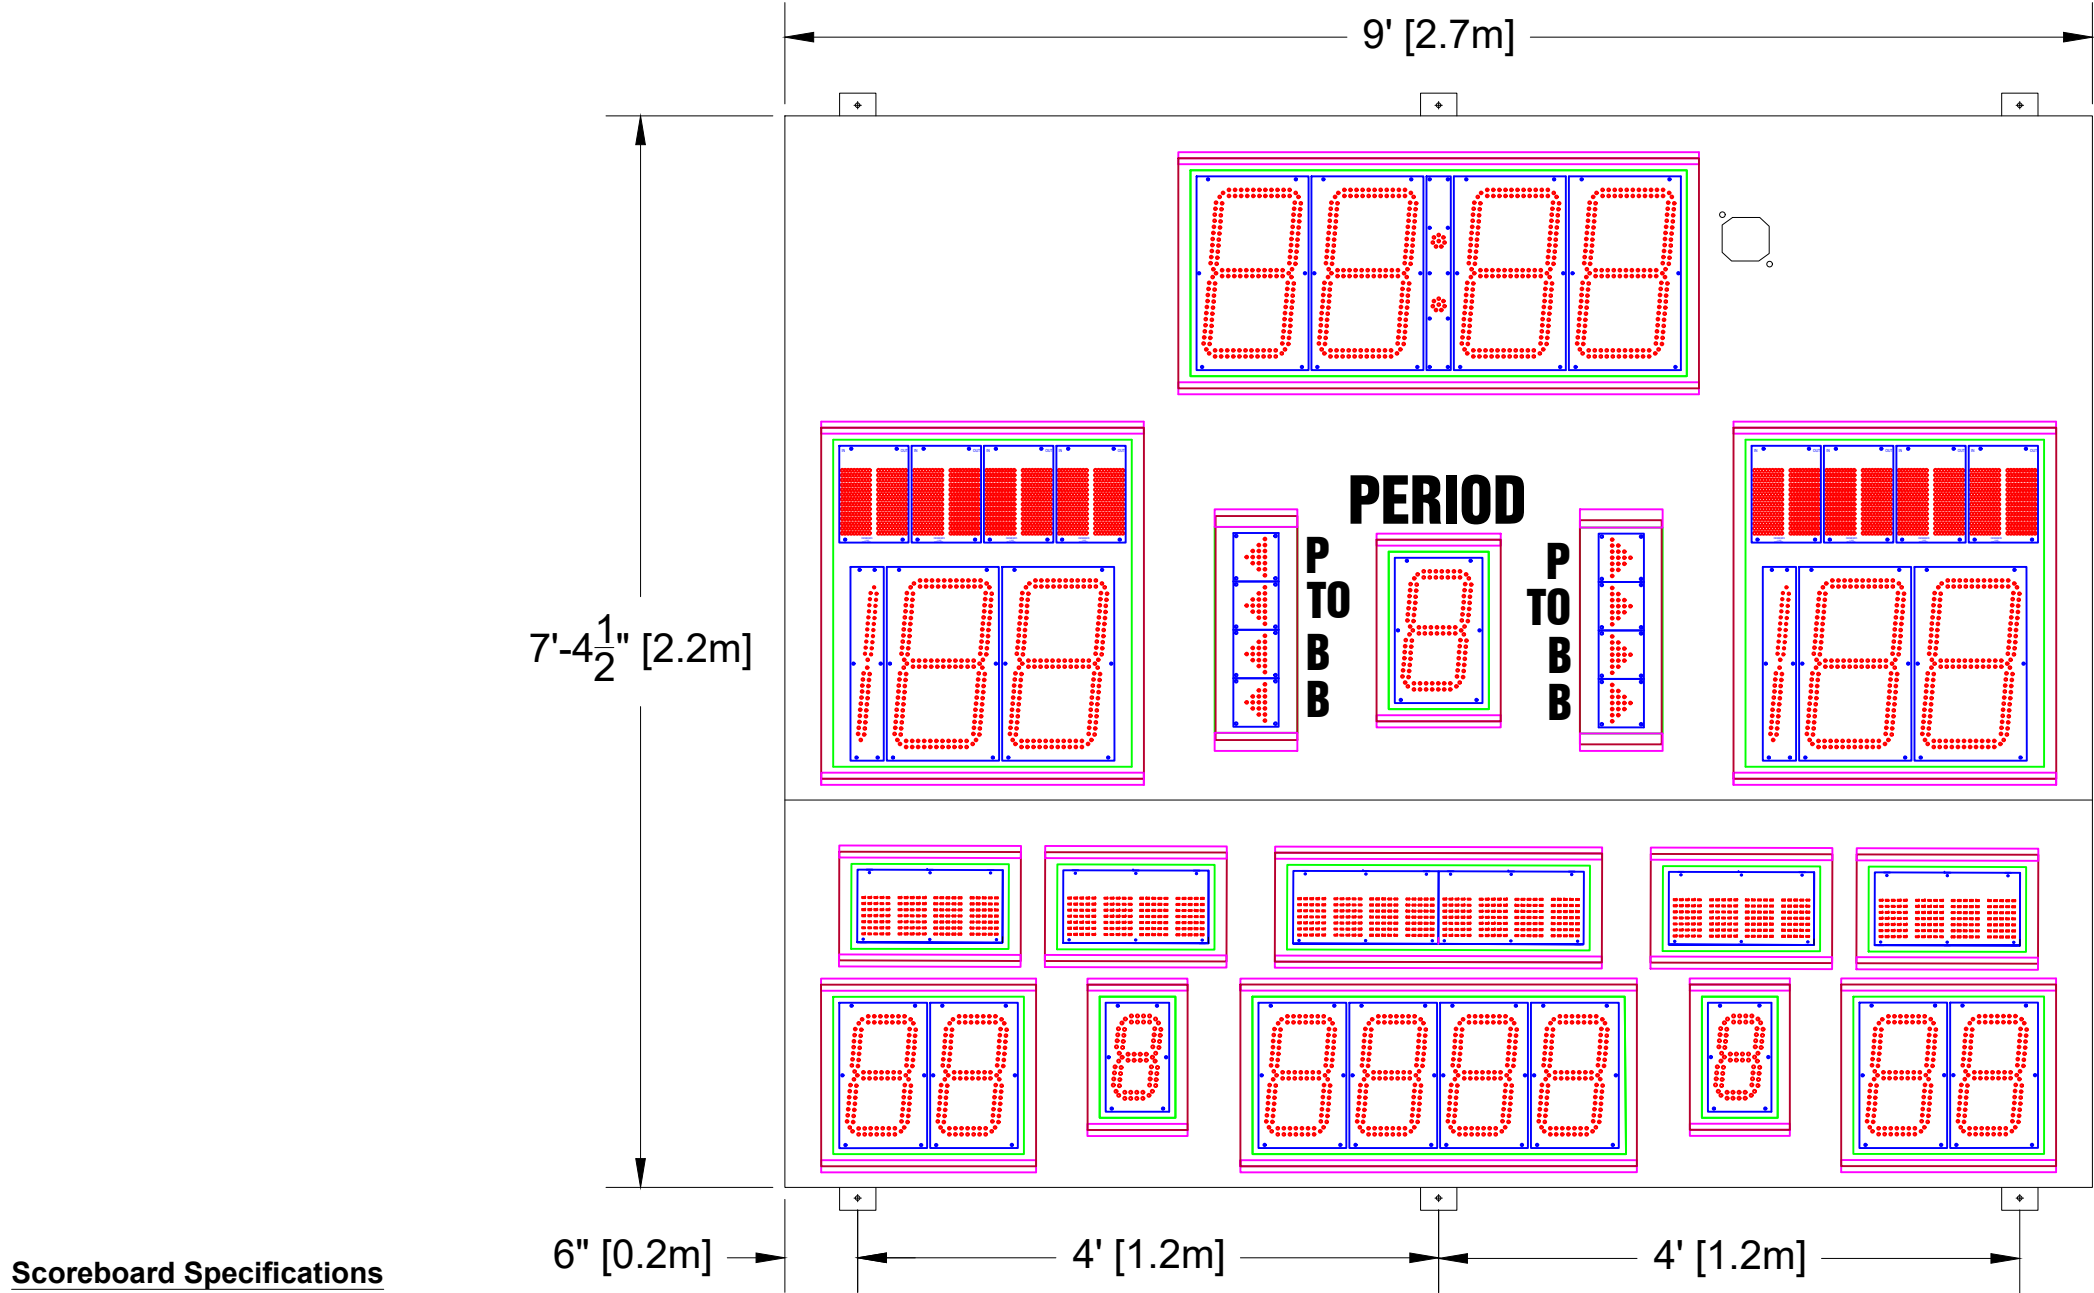

Scoreboard Specifications

- Overall size: 9' (W) x 7'4 1/2" (H) x 4" (D)
Approximate Weight 279 lbs
- 14" LED Digits for TIME, SCORE
10" LED Digits for PERIOD, TM FOULS, PLAYER FOULS
7" LED Digits for TOL
2" LED Arrows
- 5" Electronic Team Names of 8 characters
3" Electronic Captions of 4, 8 characters
- 4" White Vinyl Lettering for PERIOD
3" White Vinyl Lettering for P, TO, B
- All LED digits include the following:
- *Shatter Resistant Lexan cover
 - *Conformal coating to protect from environmental conditions
 - *Surface Mount Technology LEDs allowing for wide viewing angle



ELECTRICAL SPECIFICATIONS

- Electrical Ratings:
- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz. Requires an earth ground connection.
 - Nominal AC Current: 3.8 Amps
 - AC Current Rating of Fuse or Circuit Breaker within SB: 8 Amps

Incoming AC Mains (Power Cord) and Data Location:
On the Top of the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard
to be determined by customer in accordance
with all local electrical codes.

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	7/3/2020
C	UPDATE DRAWING	OES	4/8/2022

		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>					
<u>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</u>							
OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		DESCRIPTION					
		OES ELECTRONIC SCOREBOARDS M5009CTXH					
TOLERANCE INFORMATION Dimensions are in Inches		SIZE	FILENAME M5009CTXH	INIT DRAWING DATE 7/3/20	REV		
		B	USAGE			C	
		USE FOR REVIEW					
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30'		SCALE	NTS	DRAWN BY	MLI	PAGE	1 OF 1

Scoreboard Specifications


Overall size: 9' (W) x 7'4 1/2" (H) x 4" (D)
Approximate Weight: 242 lbs
AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz.
Requires an earth ground connection.
Incoming Mains Power and Data Location: TOP of the Scoreboard
MAX Current Draw: 2.9 Amps

14" LED Digits for TIME, SCORE
10" LED Digits for PERIOD, TM FOULS, PLAYER FOULS
7" LED Digits for TOL
2" LED Arrows

8" White Vinyl Lettering for HOME, GUEST
4" White Vinyl Lettering for PERIOD, TM FOULS, PLAYER FOULS, MATCH, POINTS
3" White Vinyl Lettering for P, TO, B, TOL

Optional AD Space:
LEFT: 30.5" (W) X 23" (H)
RIGHT: 22" (W) X 23" (H)

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

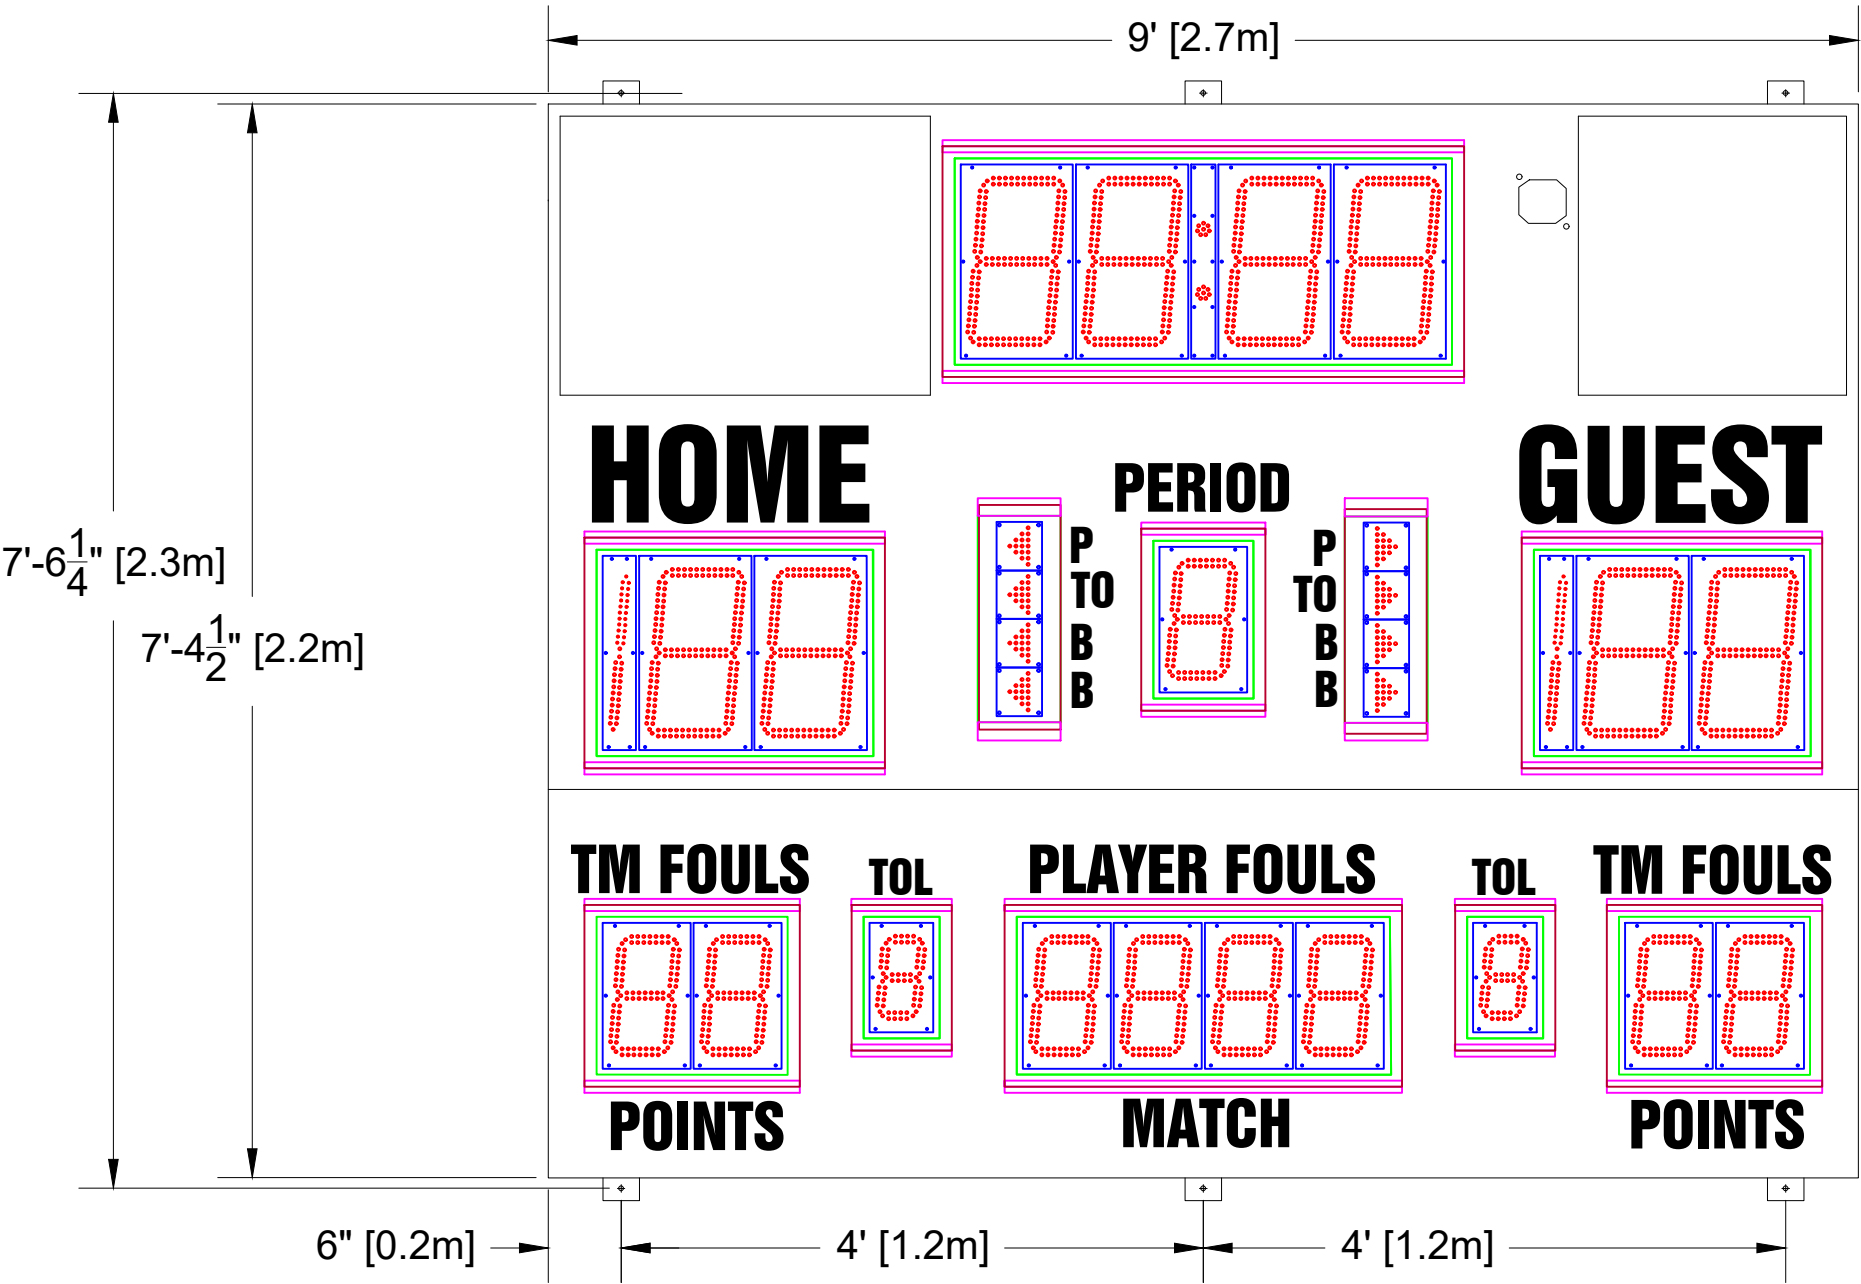

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	7/14/2021
B	ADD AD SPACE DETAILS	OES	7/14/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M5009CICV		SIZE A	INIT DRAWING DATE 7/14/21
FILENAME M5009CICV		REVISION B	
USAGE USE FOR REVIEW		DRAWN BY CGTHOMPSON	
SCALE NTS	PAGE 1 OF 1		