9'-11" [3.0m]

4'-7 3/4" [1.4m] 4'-6" [1.4m]

P TO B B

P TO B B

PERIOD

FOULS

TOL

PLYR FOULS

TOL

FOULS

POINTS

MATCH

POINTS

4'-5 1/2" [1.4m]

4'-5 1/2" [1.4m]

6" [0.2m]

Scoreboard Specifications
Overall size: 9'11" (W) x 4'6" (H) x 4" (D)
Approximate Weight: 196 lbs
Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 8 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: TOP of the Scoreboard
MAX Current Draw: 5.6 Amps

10" LED Digits for TIME, SCORE
7" LED Digits for PERIOD, FOULS, TOL, PLAYER FOULS
2" LED Arrows

5" Electronic Team Names at 8 CHARACTERS

4" White Vinyl Lettering for PERIOD, FOULS, TOL, PLYR FOULS, POINTS, MATCH
3" White Vinyl Lettering for P, TO, B

All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	8/10/2021

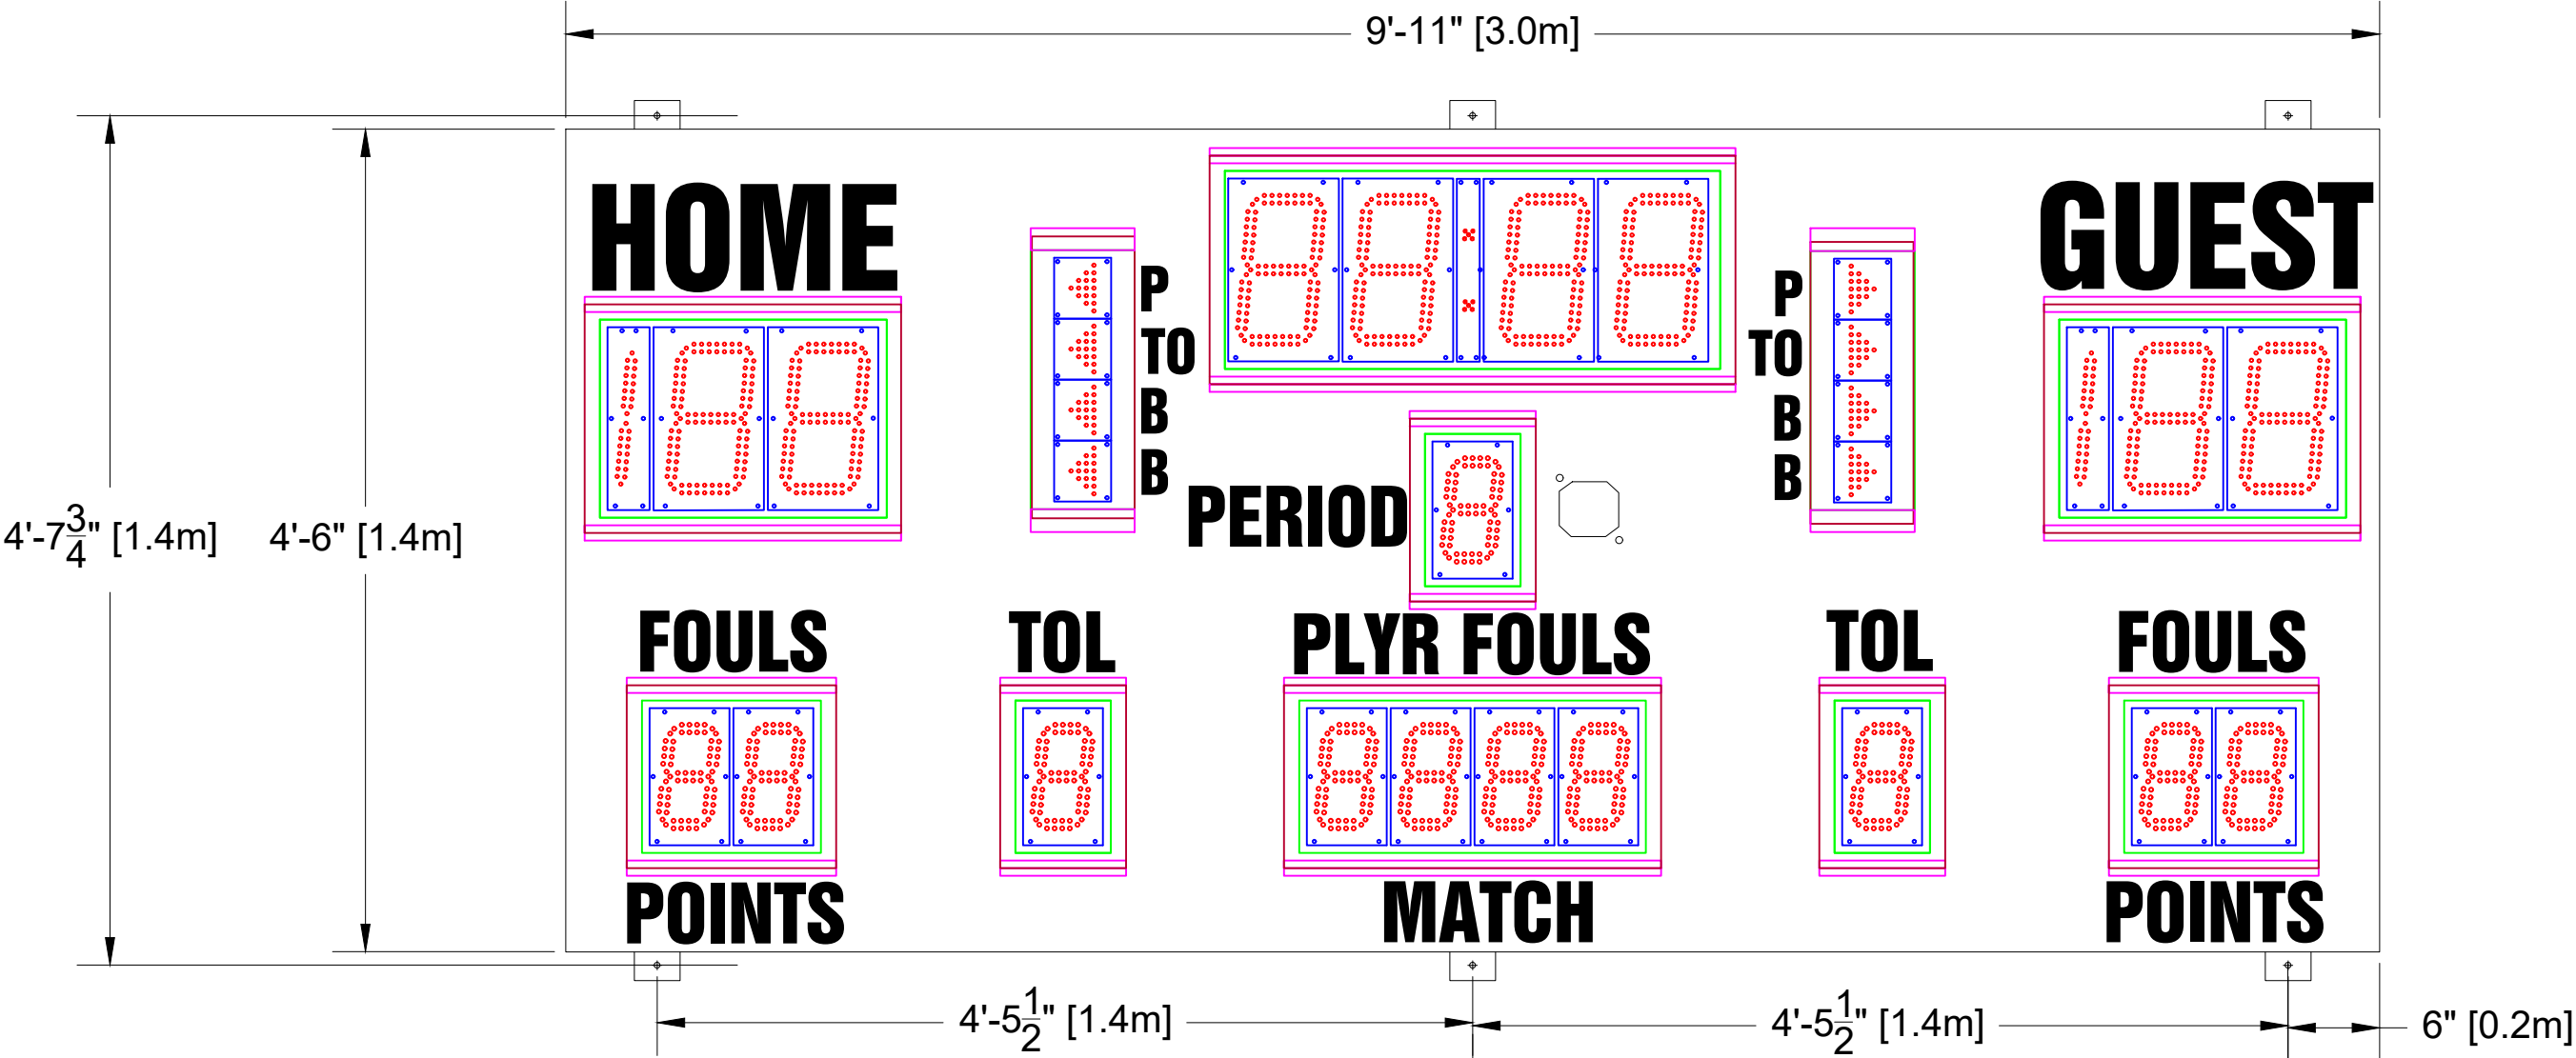DESCRIPTION
OES ELECTRONIC SCOREBOARDS
M5010AICE

TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30'

THIRD ANGLE PROJECTIONS

SIZE	FILENAME M5010AICE	INIT DRAWING DATE 8/10/21	REV
A	USAGE		A
	USE FOR REVIEW		

SCALE NTS   DRAWN BY CGTHOMPSON   PAGE 1 OF 1

HOME

GUEST

P
TO
B

P
TO
B

PERIOD

FOULS

TOL

PLYR FOULS

TOL

FOULS

POINTS

MATCH

POINTS

9'-11" [3.0m]

4'-7¾" [1.4m]

4'-6" [1.4m]

4'-5½" [1.4m]

4'-5½" [1.4m]

6" [0.2m]

Scoreboard Specifications

Overall size: 9'11" (W) x 4'6" (H) x 4" (D)

Approximate Weight: 178 lbs

Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 5 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: TOP of the Scoreboard

MAX Current Draw: 2.9 Amps

10" LED Digits for TIME, SCORE

7" LED Digits for PERIOD, FOULS, TOL, PLAYER FOULS

2" LED Arrows

7" White Vinyl Lettering for HOME, GUEST

4" White Vinyl Lettering for PERIOD, FOULS, TOL, PLYR FOUL, POINTS, MATCH

3" White Vinyl Lettering for P, TO, B

All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	8/21/2020

TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30'

THIRD ANGLE PROJECTIONS

DESCRIPTION

OES ELECTRONIC SCOREBOARDS
M5010AICV

SIZE	FILENAME M5010AICV	INIT DRAWING DATE 8/21/20	REV
A	USAGE		A
	USE FOR REVIEW		

SCALE	NTS	DRAWN BY	CGTHOMPSON	PAGE	1 OF 1