

Scoreboard Specifications

Overall size: 9'11" (W) x 7'4 1/2" (H) x 4" (D)  
Approximate Weight: 276 lbs  
Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 8 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: TOP of the Scoreboard  
MAX Current Draw: 5.6 Amps

14" LED Digits for TIME, SCORE  
10" LED Digits for PERIOD, TM FOULS, PLAYER, FOULS, POINTS  
7" LED Digits for TOL  
2" LED Arrows



5" Electronic Team Names at 8 CHARACTERS


4" White Vinyl Lettering for PERIOD, TM FOULS, PLYR, FOULS, PTS, MATCH, POINTS  
3" White Vinyl Lettering for P, TO, B, TOL

Optional AD space:  
LEFT: 36" (W) X 23.25" (H)  
RIGHT: 30" (W) X 23.25" (H)

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	7/13/2021

		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:  OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		DESCRIPTION OES ELECTRONIC SCOREBOARDS M5010BICE
TOLERANCE INFORMATION Dimensions are in Inches  Fractional $\pm 1/16"$ Two Place Decimals $\pm 0.02"$ Three Place Decimals $\pm 0.005"$ Four Place Decimals $\pm 0.0005"$ Angular $\pm 30^\circ$	THIRD ANGLE PROJECTIONS 	SIZE A FILENAME M5010BICE INIT DRAWING DATE 7/13/21 REV A
		USE FOR REVIEW
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1

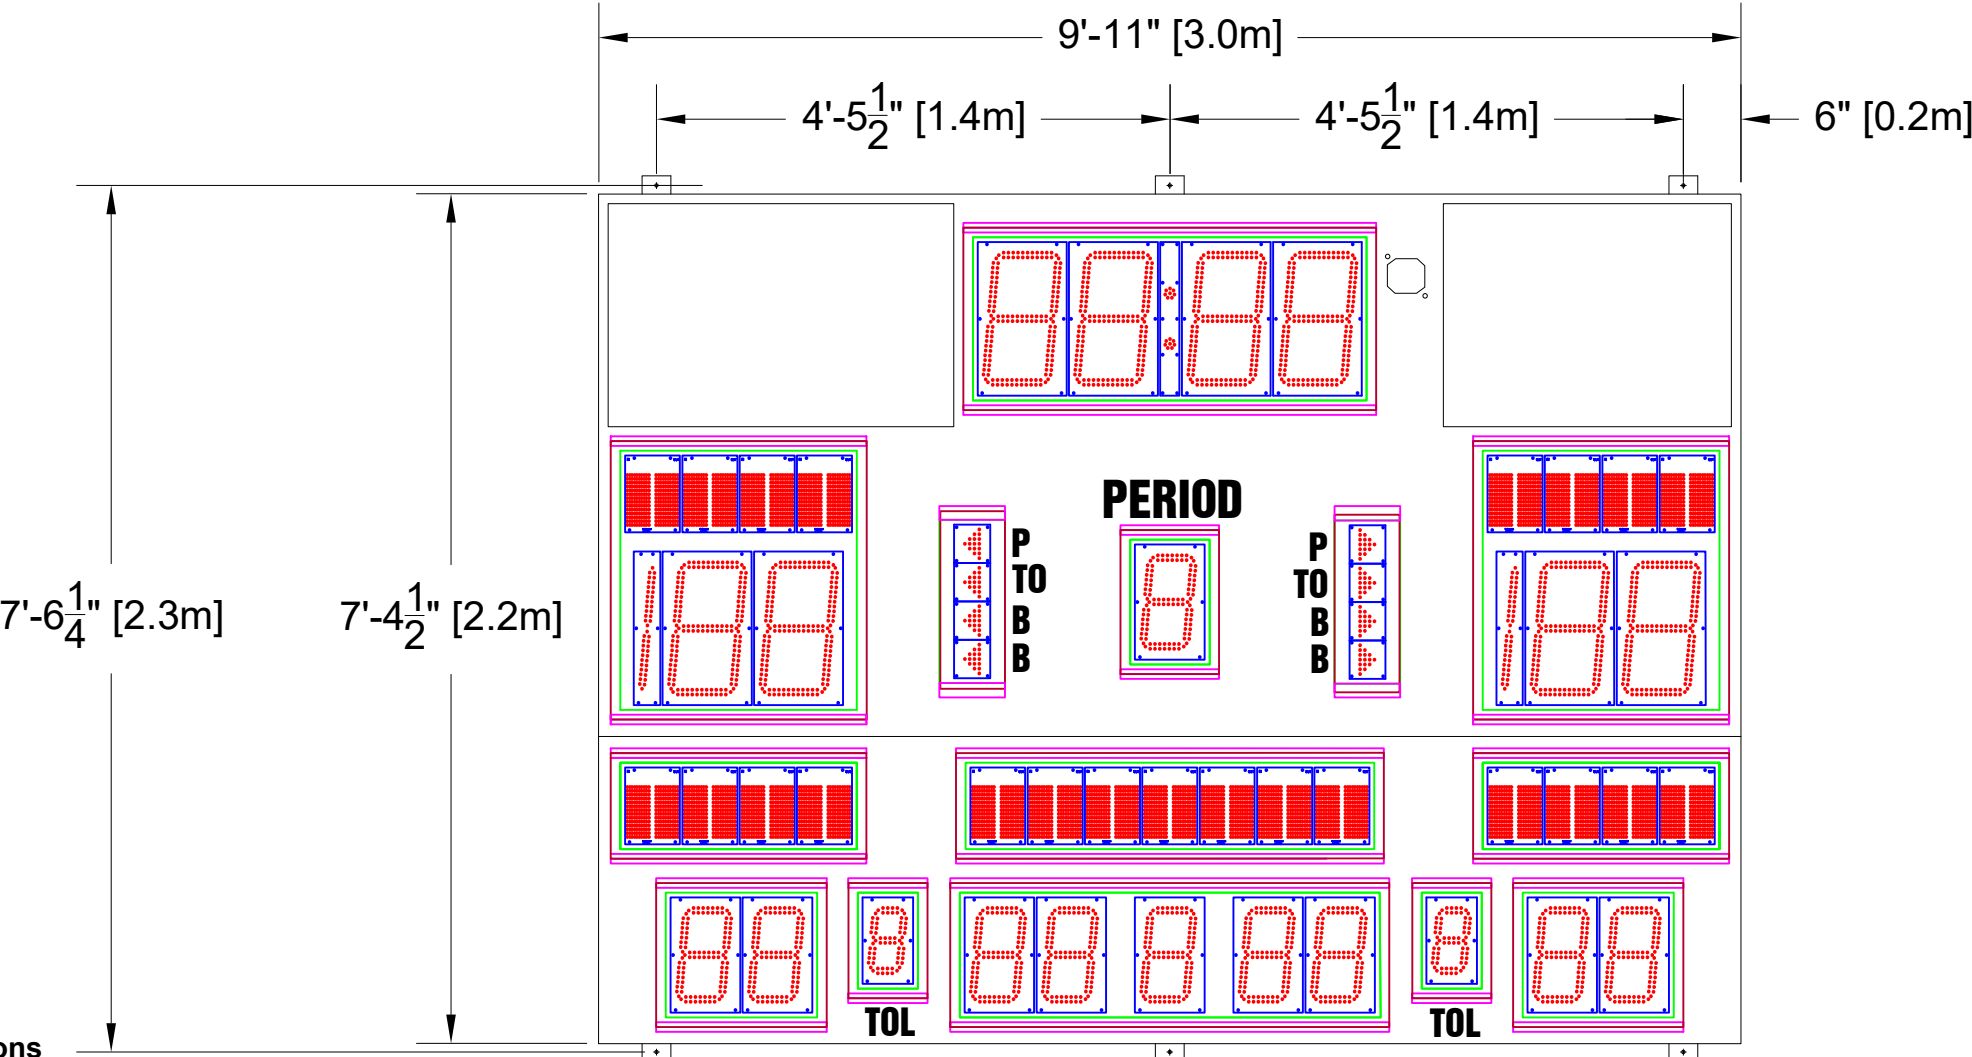

**Scoreboard Specifications**

Overall size: 9'11" (W) x 7'4 1/2" (H) x 4" (D)  
Approximate Weight: 276 lbs  
Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 8 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: TOP of the Scoreboard  
MAX Current Draw: 8.3 Amps

14" LED Digits for TIME, SCORE  
10" LED Digits for PERIOD, TM FOULS, PLAYER, FOULS, POINTS  
7" LED Digits for TOL  
2" LED Arrows



5" Electronic Team Names at 8 Characters  
5" Electronic Captions at 8 & 14 Characters


4" White Vinyl Lettering for PERIOD  
3" White Vinyl Lettering for P, TO, B, TOL

Optional AD space:  
LEFT: 36" (W) X 23.25" (H)  
RIGHT: 30" (W) X 23.25" (H)

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	1/12/2021
B	UPDATED MIDDLE PLACARD TO T14	OES	12/09/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:  OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
TOLERANCE INFORMATION Dimensions are in Inches  Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
SIZE A	FILENAME M5010BICH	INIT DRAWING DATE 1/12/21	REV A
USAGE USE FOR REVIEW			
SCALE NTS	DRAWN BY RDONALD	PAGE 1 OF 1	

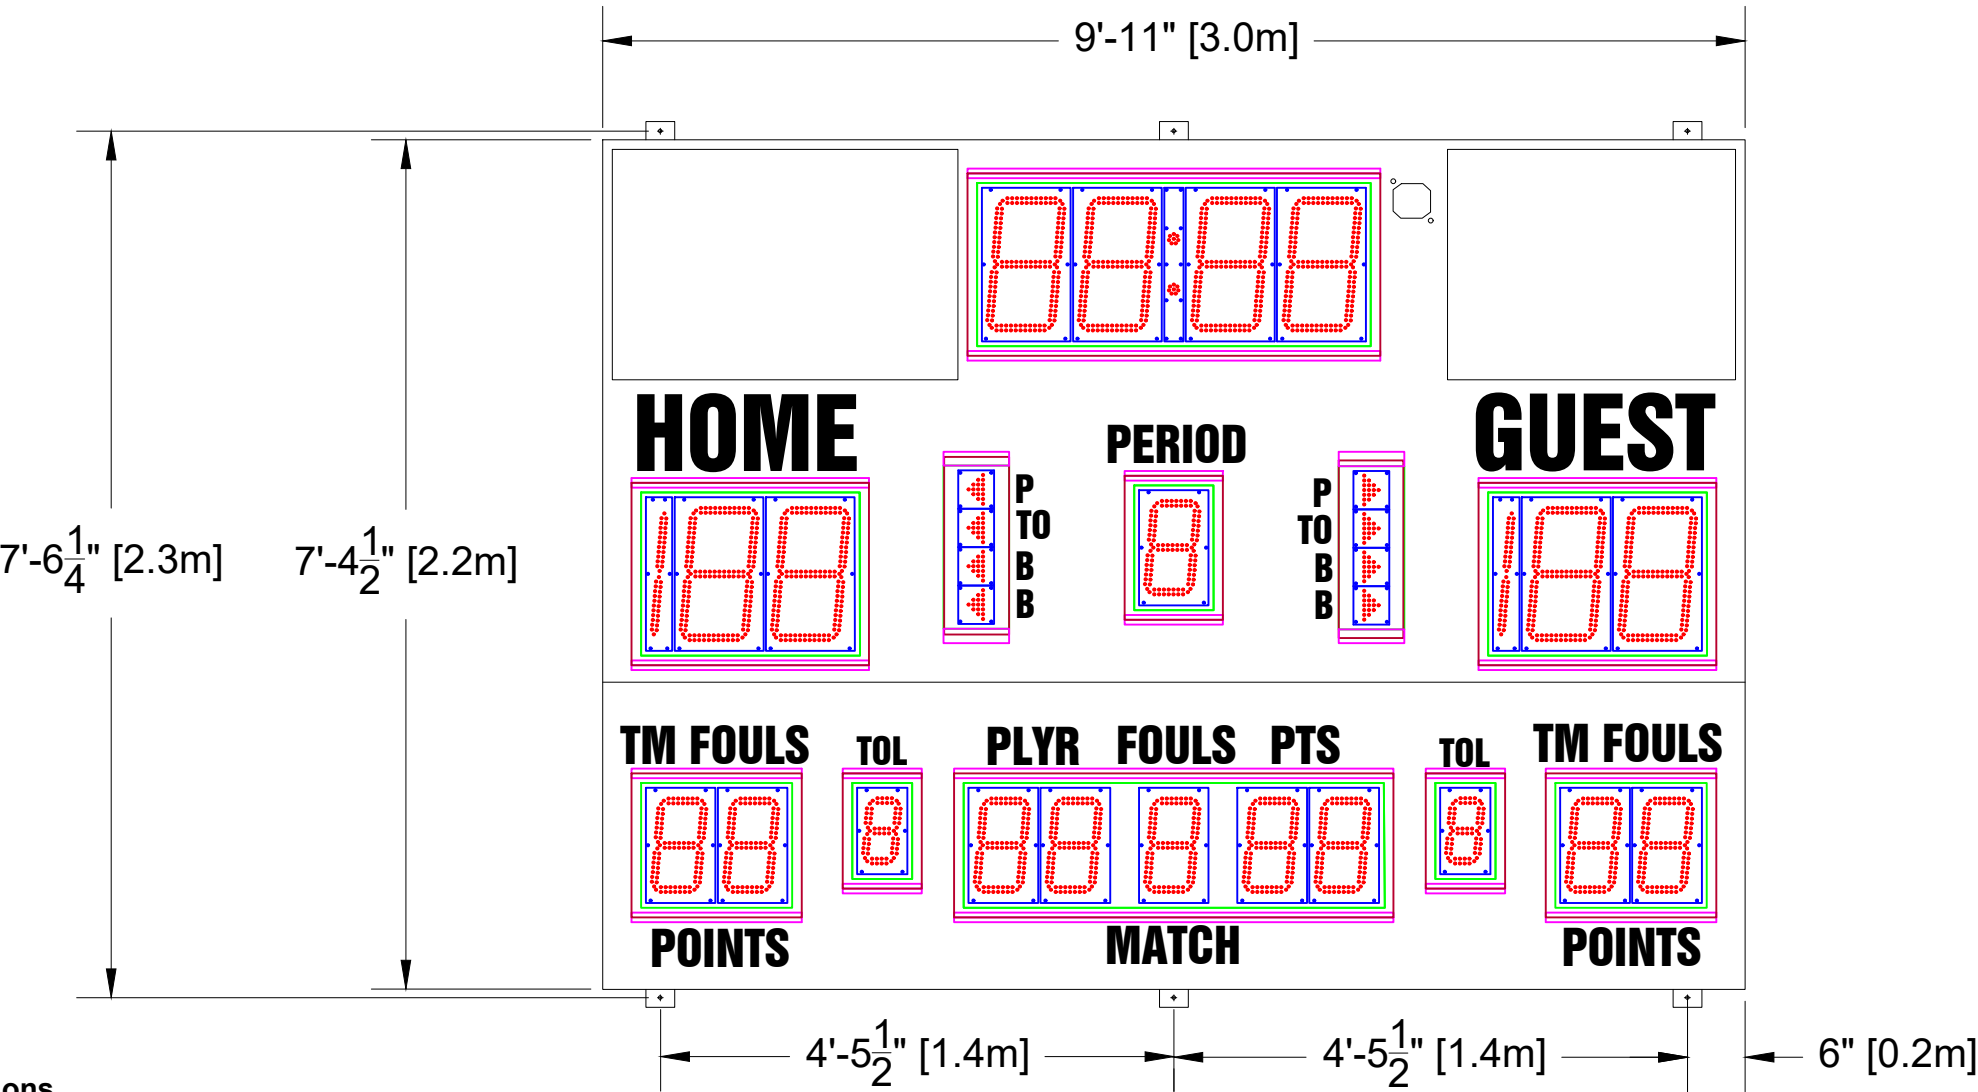

**Scoreboard Specifications**

Overall size: 9'11" (W) x 7'4 1/2" (H) x 4" (D)  
Approximate Weight: 258 lbs  
Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 5 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: TOP of the Scoreboard  
MAX Current Draw: 2.9 Amps

14" LED Digits for TIME, SCORE  
10" LED Digits for PERIOD, TM FOULS, PLAYER, FOULS, POINTS  
7" LED Digits for TOL  
2" LED Arrows

8" White Vinyl Lettering for HOME, GUEST  
4" White Vinyl Lettering for PERIOD, TM FOULS, PLYR, FOULS, PTS, MATCH, POINTS  
3" White Vinyl Lettering for P, TO, B, TOL

Optional AD space:  
LEFT: 36" (W) X 24" (H)  
RIGHT: 30" (W) X 24" (H)

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	8/9/2021
		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
		<div><div>DESCRIPTION</div><div>OES ELECTRONIC SCOREBOARDS M5010BICV</div></div>	
SIZE	FILENAME M5010BICV	INIT DRAWING DATE 8/9/21	REV
A	USAGE USE FOR REVIEW		A
TOLERANCE INFORMATION Dimensions are in Inches  Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
SCALE	NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1