

Scoreboard Specifications

Overall size: 9' (W) x 7'8" (H) x 4" (D)
Approximate Weight: 277 lbs
Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 10 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: ON TOP OF THE SCOREBOARD.
MAX Current Draw: 5.6 Amps

- 14" LED Digits for TIME, SCORE
- 10" LED Digits for PERIOD, PENALTY
- 5" Electronic Team Names at 8 CH
- 4" White Vinyl Lettering for PERIOD, PENALTY

Optional AD Space:
44" (W) X 34" (H)

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	10/8/2020

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.


TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M6009BICE			
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M6009BICE	10/8/20	A
	USAGE		
SCALE	NTS	DRAWN BY	CCTHOMPSON
PAGE		1 OF 1	

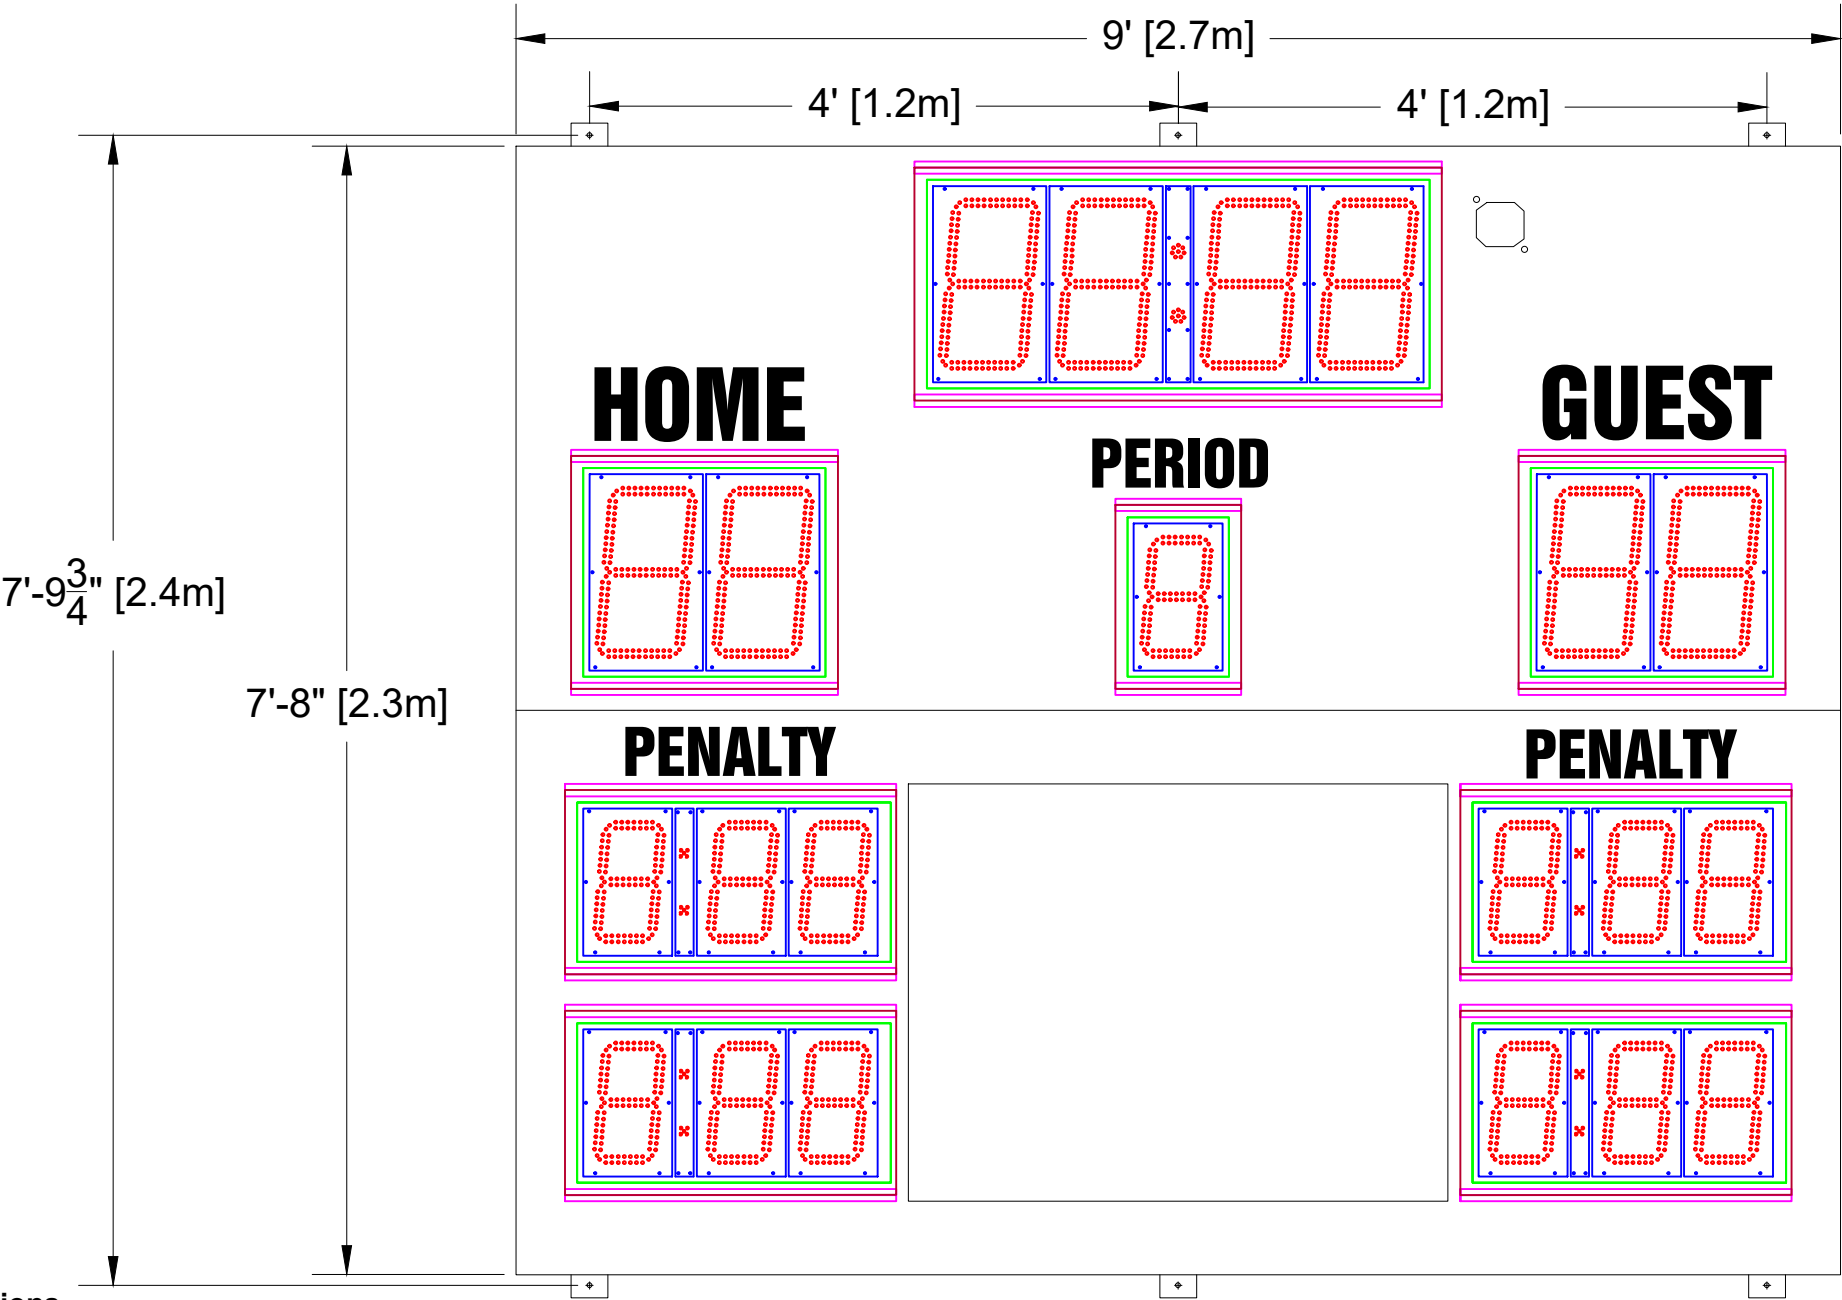

Scoreboard Specifications

Overall size: 9' (W) x 7'8" (H) x 4" (D)
Approximate Weight: 259 lbs
Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 10 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: ON TOP OF THE SCOREBOARD.
MAX Current Draw: 2.9 Amps

- 14" LED Digits for TIME, SCORE
- 10" LED Digits for PERIOD, PENALTY
- 6" White Vinyl Lettering for HOME, GUEST
- 4" White Vinyl Lettering for PERIOD, PENALTY
- Optional AD Space:
44" (W) X 34" (H)

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	10/8/2020

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION		OES ELECTRONIC SCOREBOARDS M6009BICV	
SIZE	FILENAME M6009BICV	INIT DRAWING DATE 10/8/20	REV A
A	USAGE USE FOR REVIEW		
SCALE	NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1