

Scoreboard Specifications



Overall size: 18' (W) x 3'10" (H) x 4" (D)
Approximate Weight: 291 lbs
Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 10 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: ON TOP OF THE SCOREBOARD.
MAX Current Draw: 5.6 Amps


14" LED Digits for TIME, SCORE
10" LED Digits for PERIOD, PENALTY, SOG

5" Electronic Team Names at 8 CH

4" White Vinyl Lettering for PERIOD, PENALTY, SOG

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	10/9/2020
		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		DESCRIPTION <div>OES ELECTRONIC SCOREBOARDS M6018BICE</div>	
<div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional $\pm 1/16"$ Two Place Decimals $\pm 0.02"$ Three Place Decimals $\pm 0.005"$ Four Place Decimals $\pm 0.0005"$ Angular $\pm 30^\circ$</div>		<div><div><div>SIZE</div><div>FILENAME M6018BICE</div></div><div><div>INIT DRAWING DATE 10/9/20</div><div>REV A</div></div></div> <div><div>THIRD ANGLE PROJECTIONS</div><div></div></div> <div><div>USAGE</div><div>USE FOR REVIEW</div></div>	
<div>SCALE</div> <div>NTS</div>		<div><div>DRAWN BY</div><div>CGTHOMPSON</div></div> <div>PAGE 1 OF 1</div>	

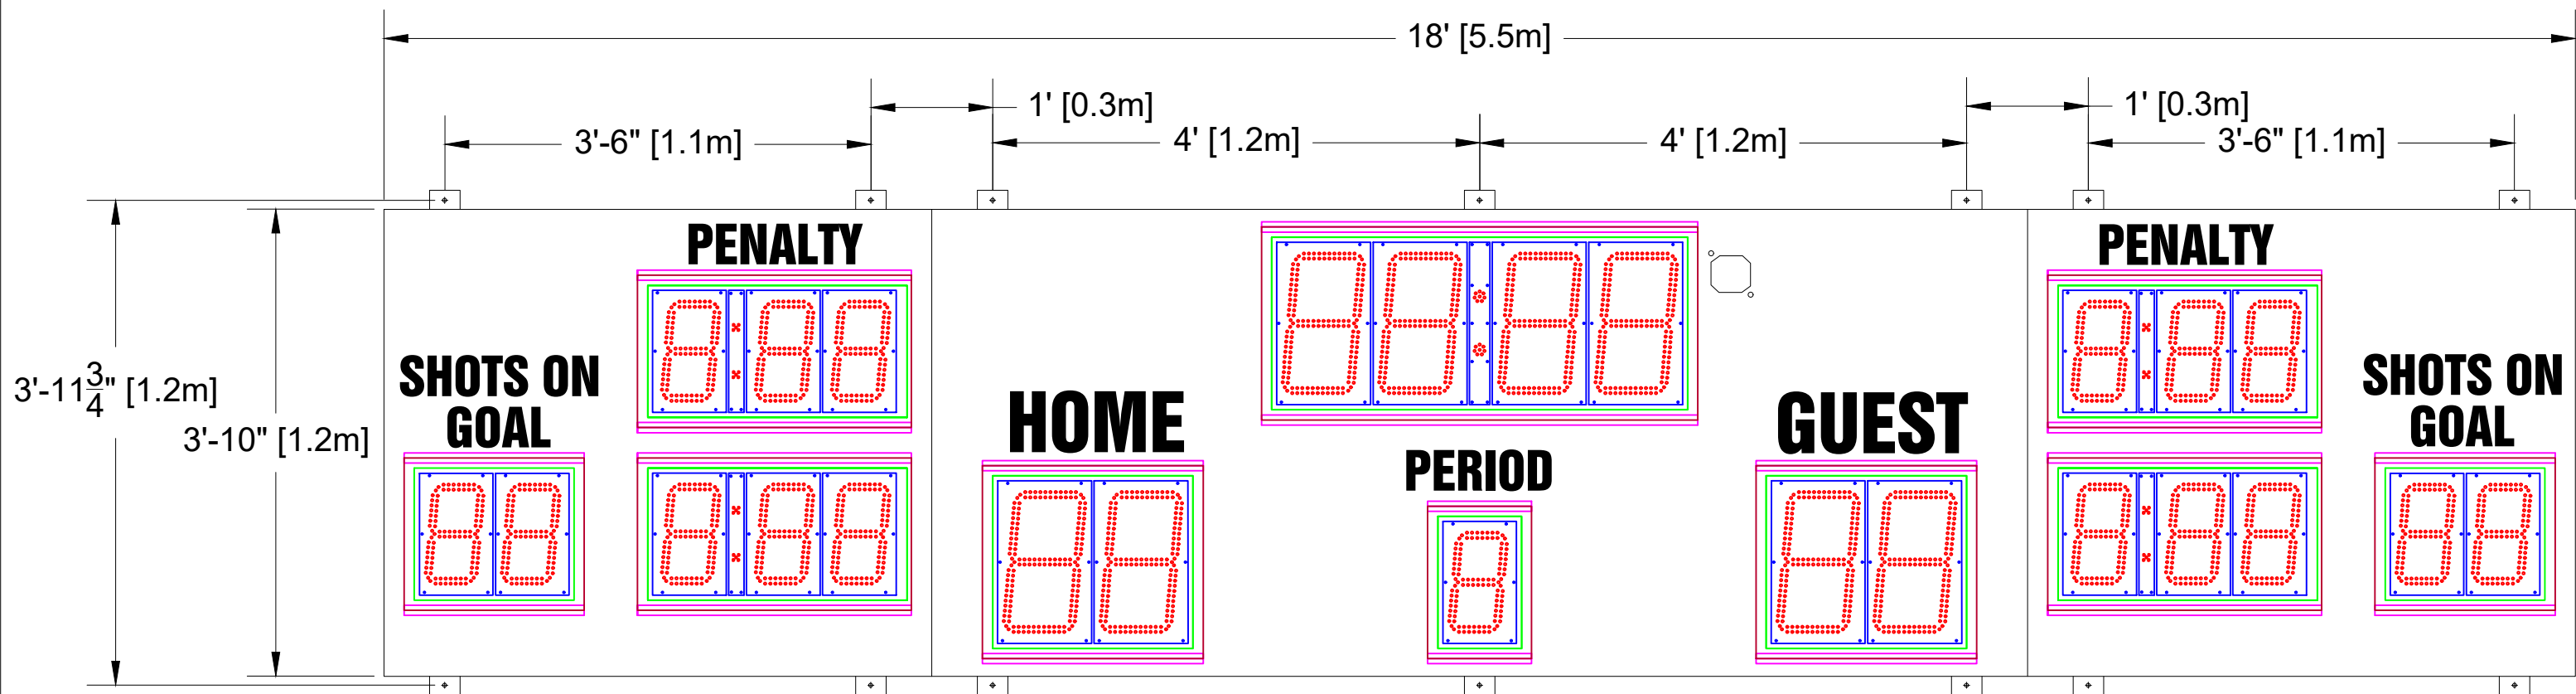

Scoreboard Specifications



Overall size: 18' (W) x 3'10" (H) x 4" (D)
Approximate Weight: 273 lbs
Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 10 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: ON TOP OF THE SCOREBOARD.
MAX Current Draw: 2.9 Amps

14" LED Digits for TIME, SCORE
10" LED Digits for PERIOD, PENALTY, SOG

6" White Vinyl Lettering for HOME, GUEST
4" White Vinyl Lettering for PERIOD, PENALTY, SOG

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	10/9/2020

	 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>		
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <p>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</p>			
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30'			

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M6018BICV			
SIZE	FILENAME M6018BICV	INIT DRAWING DATE 10/9/20	REV
A	USAGE		A
USE FOR REVIEW			
SCALE	NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1