

Scoreboard Specifications

Overall size: 23' (W) x 3'10" (H) x 4" (D) Approximate Weight: 329 lbs Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 10 Amps. Requires an earth ground connection. Incoming Mains Power and Data Location: ON TOP OF THE SCOREBOARD. MAX Current Draw: 5.6 Amps


14" LED Digits for TIME, SCORE 10" LED Digits for PERIOD, PENALTY, SOG

5" Electronic Team Names at 8 CH

6" White Vinyl Lettering for PERIOD 4" White Vinyl Lettering for PENALTY, SOG

All LED digits include the following:

- * Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions *
- Surface Mount Technology LEDs allowing for wider viewing angle *




REVISION

DISCLOSED HEREIN. THIS E PROPRIETARY MATERIAL D SUCH IS NOT TO BE COPIEL WAY WITHOUT PRIOR WRIT

TOLERANCE INFORMATION Dimensions are in Inches

Fractional \pm 1/16" Two Place Decimals \pm 0.02" Three Place Decimals \pm 0.005" Four Place Decimals \pm 0.0005" Angular ± 30'

| DESCR | RIPTION | | | | AUTHOR | DATE | |
|--|-------------|------------------------------------|-----------------------|--|------------------------|---------|-----|
| NITIAL | DESIGN | | | | OES | 10/9/20 | 20 |
| | | | | | | | |
| VING THIS DRAWING AND TY RIGHTS TO THE MATERIAL DRAWING INCLUDES UNPUBLISHED EVELOPED BY OES, INC. AND AS D, REPRODUCED OR USED IN ANY ITEM AUTHORIZATION FROM OES. | | DES London Tel: (51 Fax: (51 | | | | | |
| | THIRD ANGLE | SIZE | FILENAME M6023BICE | | INIT DRAWIN 10/9/20 | G DATE | REV |
| | PROJECTIONS | A USE FOR RE | | | EVIEW | | A |
| | | SCALI | | | | | |

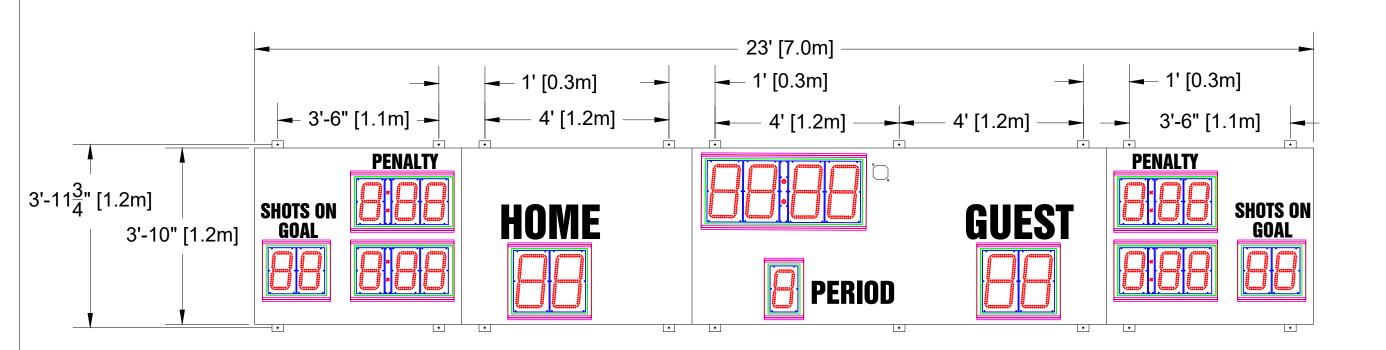

Scoreboard Specifications

Overall size: 23' (W) x 3'10" (H) x 4" (D) Approximate Weight: 311 lbs Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 10 Amps. Requires an earth ground connection. MAX Current Draw: 2.9 Amps

14" LED Digits for TIME, SCORE 10" LED Digits for PERIOD, PENALTY, SOG

9" White Vinyl Lettering for HOME, GUEST6" White Vinyl Lettering for PERIOD4" White Vinyl Lettering for PENALTY, SOG

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

| | REVISION | DI |
|----|--------------------|-----------|
| | А | IN |
| | | |
| | | |
| | | |
| τı | CE TO PERSON RECI | EIVI |
| CF | INICAL INFORMATION | <u>N:</u> |
| | | |

OES, INC. CLAIMS PROPERT DISCLOSED HEREIN. THIS D PROPRIETARY MATERIAL DE SUCH IS NOT TO BE COPIED WAY WITHOUT PRIOR WRIT INC.

TOLERANCE INFORMATION Dimensions are in Inches

 $\begin{array}{l} \mbox{Fractional \pm 1/16"} \\ \mbox{Two Place Decimals \pm 0.02"} \\ \mbox{Three Place Decimals \pm 0.005"} \\ \mbox{Four Place Decimals \pm 0.0005"} \\ \mbox{Angular \pm 30'} \end{array}$

| DESCR | RIPTION | | | | AUTHOR DATE | | | |
|--|-----------------|--------------|---------------------------------------|--|---------------------|---------|-----|--|
| NITIAL | DESIGN | | | | OES | 10/9/20 | 20 | |
| | | | | | | | | |
| VING THIS DRAWING AND TY RIGHTS TO THE MATERIAL DRAWING INCLUDES UNPUBLISHED EVELOPED BY OES, INC. AND AS D, REPRODUCED OR USED IN ANY TTEN AUTHORIZATION FROM OES. | | DESCF | London, C Tel: (519) Fax: (519) | | | •••• | | |
| I | THIRD ANGLE | | FILENAME M6023BICV | | INIT DRAWIN 10/9/20 | G DATE | REV | |
| 5" | PROJECTIONS | A USE FOR RE | | | EVIEW | | A | |
| 5" 5" | $ \Psi \square$ | SCALI | E NTS | | | 1 OF 1 | | |