

Scoreboard Specifications

Overall size: 16' (W) x 6' (H) x 6" (D)
Approximate Weight: 572 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the INNING Digit.

17" LED Digits for HOME, INNING, GUEST, BALL, STRIKE, OUT, LAST PLAY
2" LED Dots for H, E

10" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, INNING, GUEST
7" White Vinyl Lettering for H, E


This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/14/2021

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional $\pm 1/16"$ Two Place Decimals $\pm 0.02"$ Three Place Decimals $\pm 0.005"$ Four Place Decimals $\pm 0.0005"$ Angular $\pm 30^\circ$</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>		<div><div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div></div>	

DESCRIPTION					
OES ELECTRONIC SCOREBOARDS M7116BxCV-LP					
SIZE B	FILENAME M7116BUXV-LP	INIT DRAWING DATE 3/14/21		REV A	
	USAGE USE FOR REVIEW				
SCALE NTS		DRAWN BY MLI		PAGE 1 OF 1	

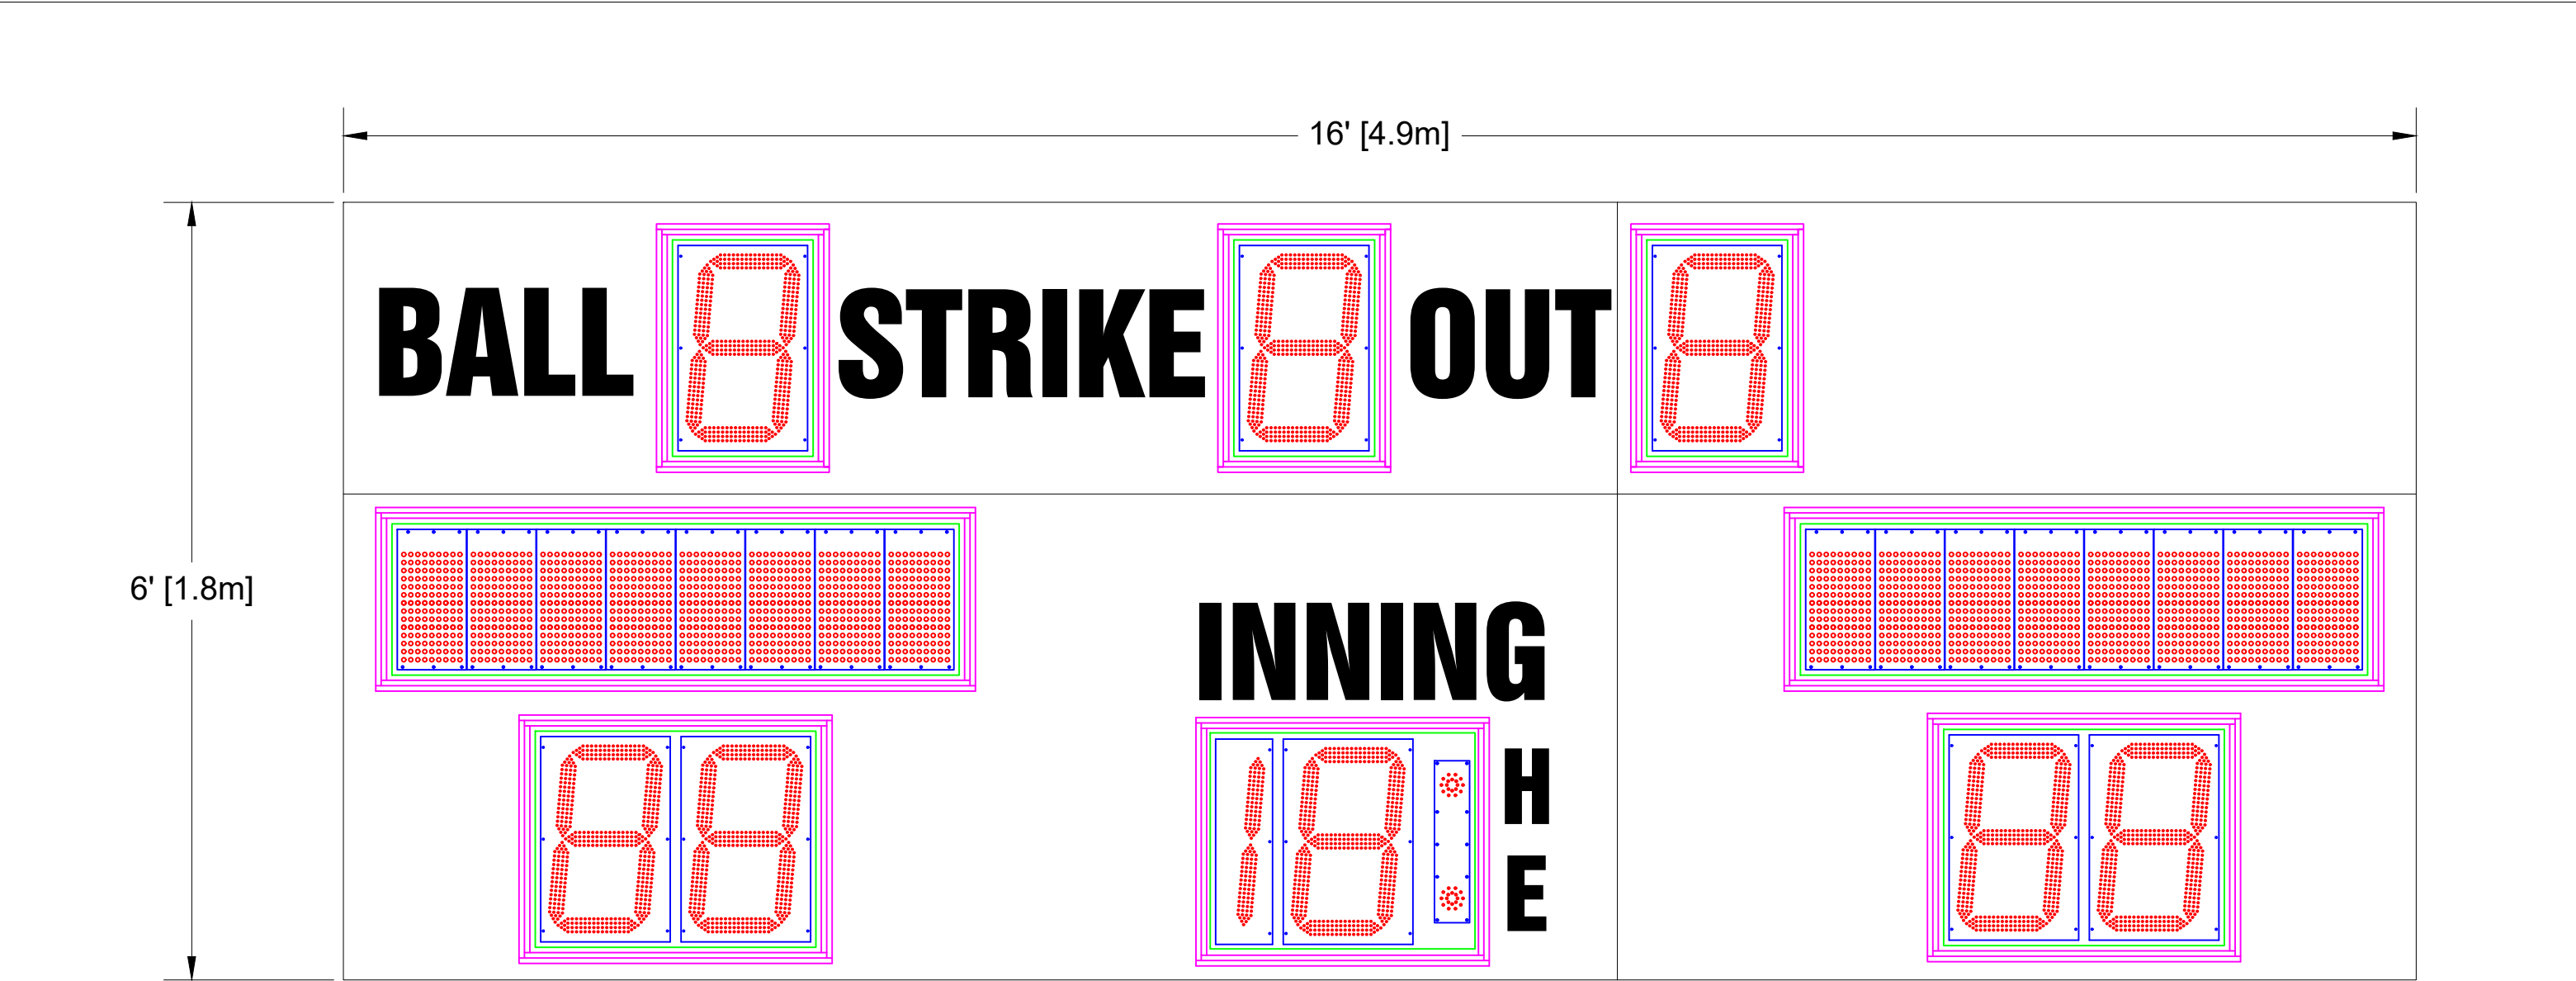

Scoreboard Specifications

Overall size: 16' (W) x 6' (H) x 6" (D)
Approximate Weight: 572 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the INNING Digit.

17" LED Digits for INNING, BALL, STRIKE, OUT
10" Electronic Team Names at 8 CH
2" LED Dots for H, E


10" White Vinyl Lettering for BALL, STRIKE, OUT, INNING
7" White Vinyl Lettering for H, E

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	5/5/2021

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div><div><div>OES</div><div>SCOREBOARDS</div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M7116BxCE			
SIZE B	FILENAME M7116BUXE	INIT DRAWING DATE 5/5/21	REV A
	USAGE USE FOR REVIEW		
SCALE NTS		DRAWN BY MLI	

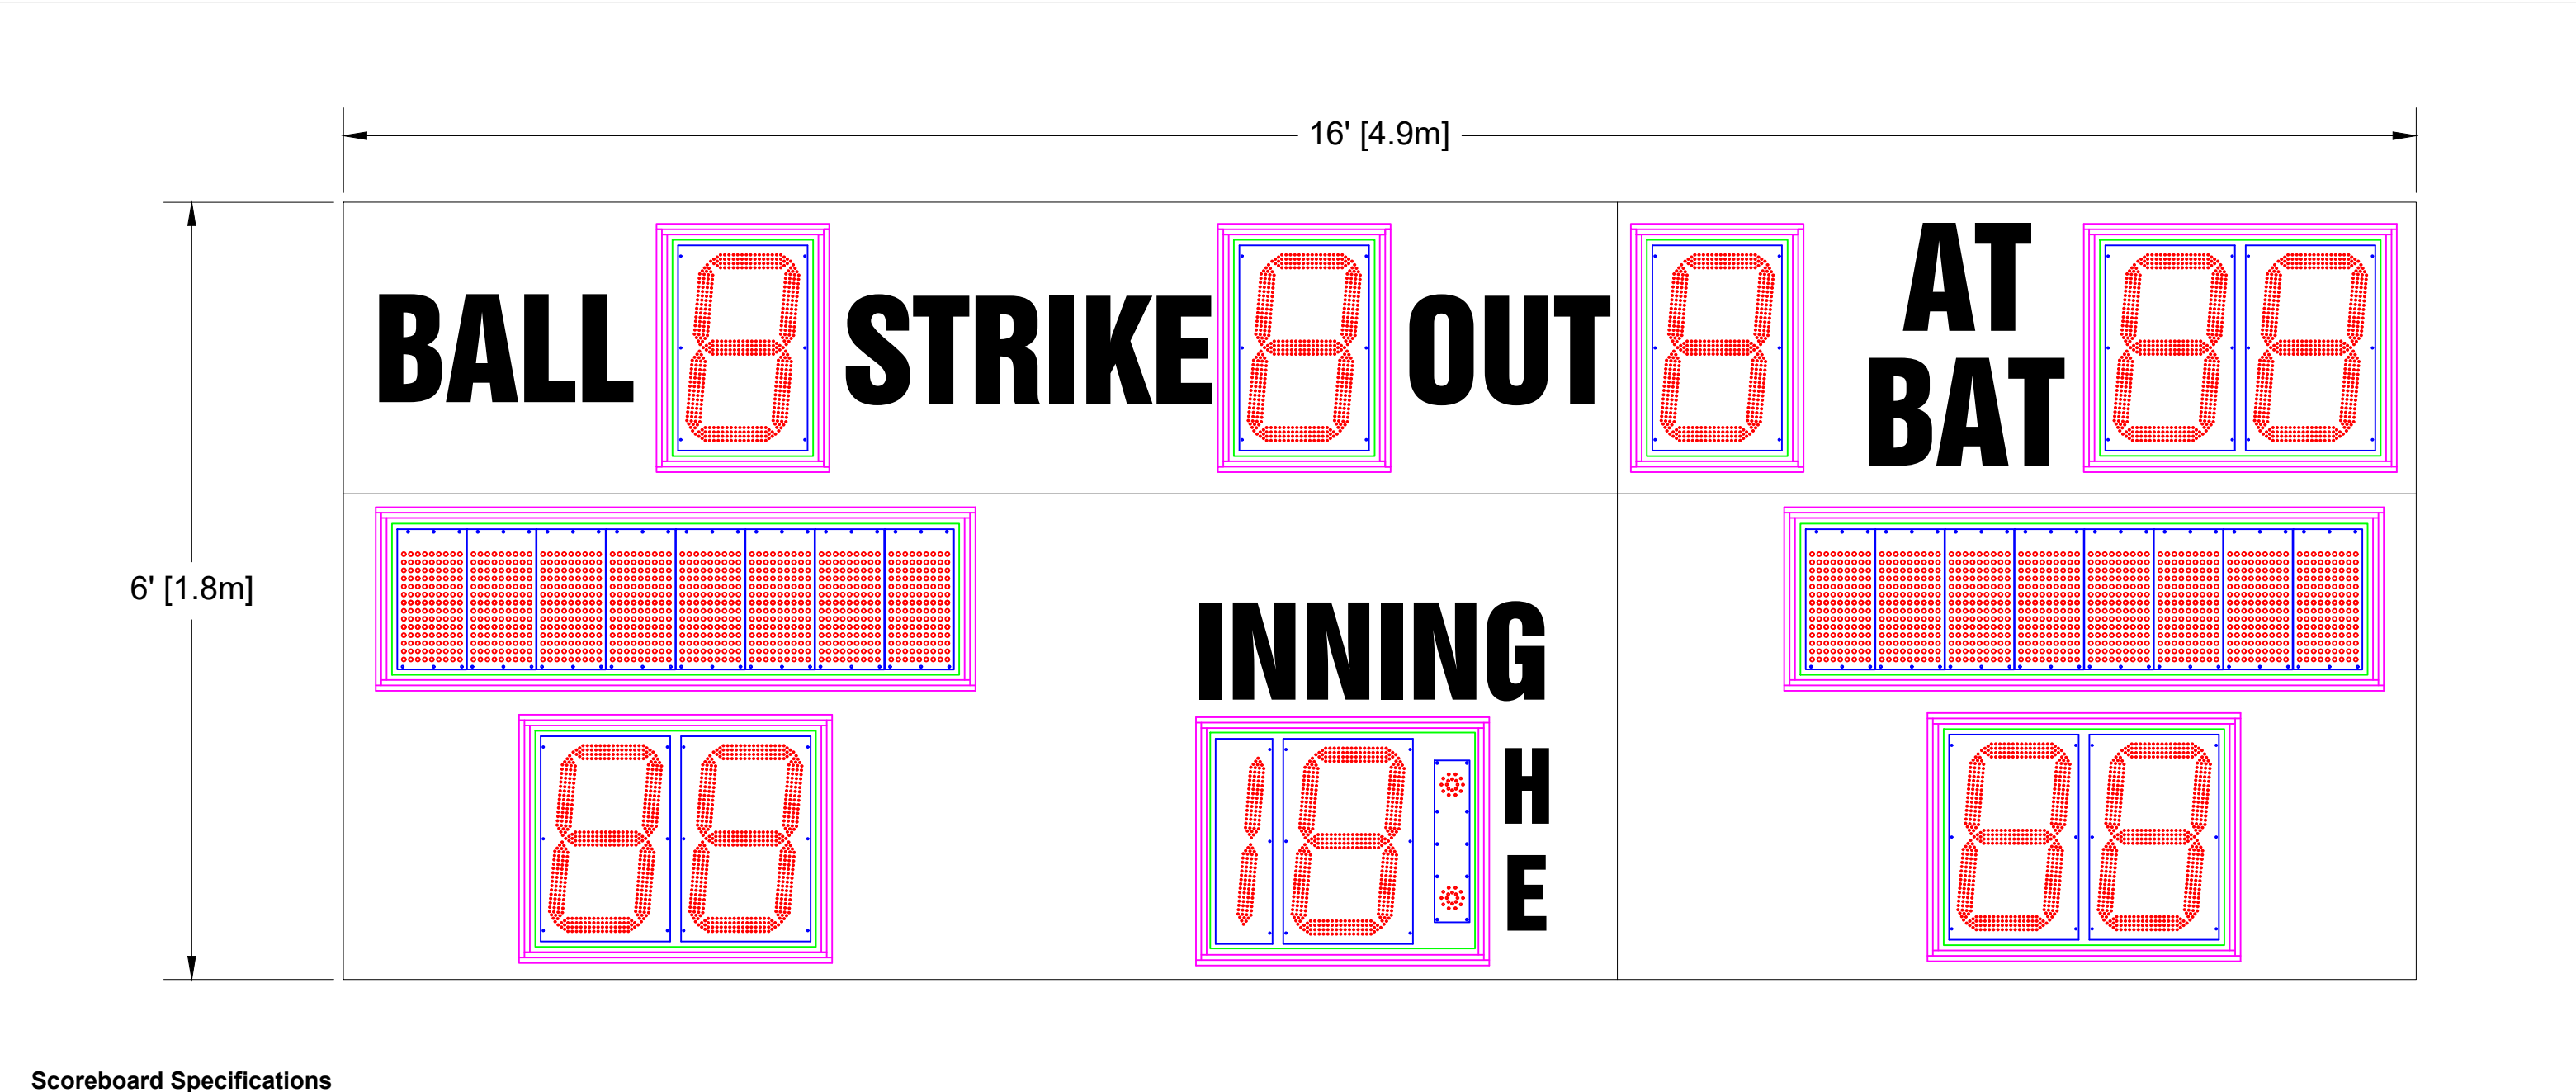

Scoreboard Specifications

Overall size: 16' (W) x 6' (H) x 6" (D)
Approximate Weight: 572 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the INNING Digit.

17" LED Digits for INNING, BALL, STRIKE, OUT, AT BAT
10" Electronic Team Names at 8 CH
2" LED Dots for H, E


10" White Vinyl Lettering for BALL, STRIKE, OUT, INNING, AT BAT
7" White Vinyl Lettering for H, E

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/5/2021

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div><div><div>OES</div><div>SCOREBOARDS</div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div> <div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M7116BxCE-AB</div> <div><div><div>SIZE</div><div>FILENAME</div><div>INIT DRAWING DATE</div><div>REV</div></div><div><div>B</div><div>M7116BUXE-AB</div><div>5/5/21</div><div>A</div></div><div>USAGE</div><div>USE FOR REVIEW</div></div> <div><div>SCALE</div><div>NTS</div><div>DRAWN BY</div><div>MLI</div><div>PAGE</div><div>1 OF 1</div></div>
<div><div>THIRD ANGLE PROJECTIONS</div><div></div></div>		

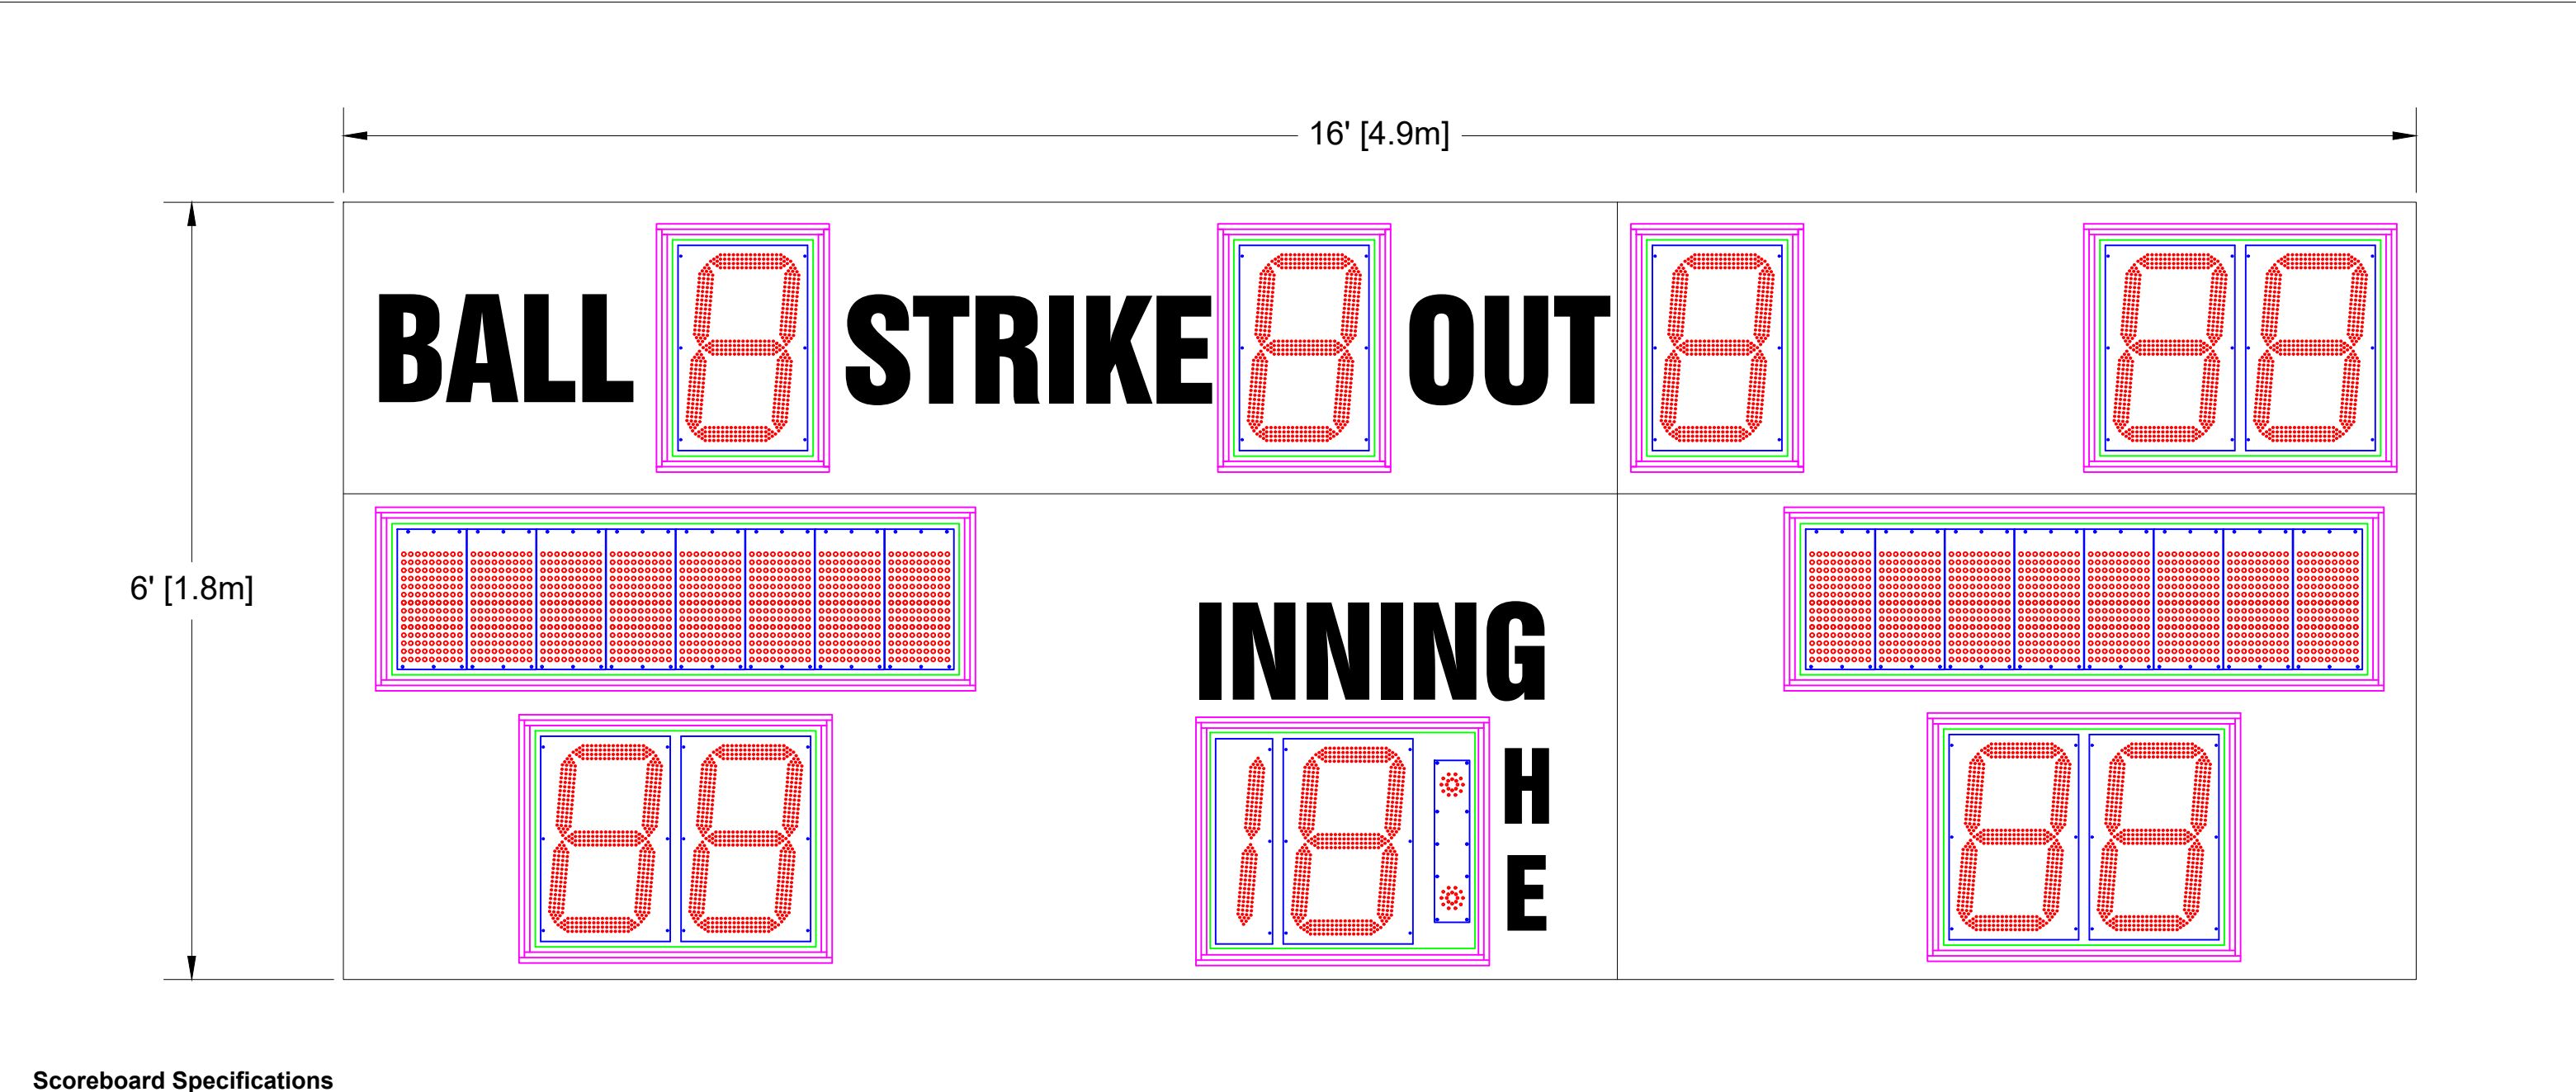

Scoreboard Specifications

Overall size: 16' (W) x 6' (H) x 6" (D)
Approximate Weight: 572 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the INNING Digit.

17" LED Digits for INNING, BALL, STRIKE, OUT, LAST PLAY
10" Electronic Team Names at 8 CH
2" LED Dots for H, E


10" White Vinyl Lettering for BALL, STRIKE, OUT, INNING
7" White Vinyl Lettering for H, E

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/28/2021

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>		<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M7116BxCE-LP</div>	
				SIZE B	FILENAME M7116BUXE-LP
		INIT DRAWING DATE 3/28/21		REV A	
SCALE NTS		DRAWN BY MLI		PAGE 1 OF 1	

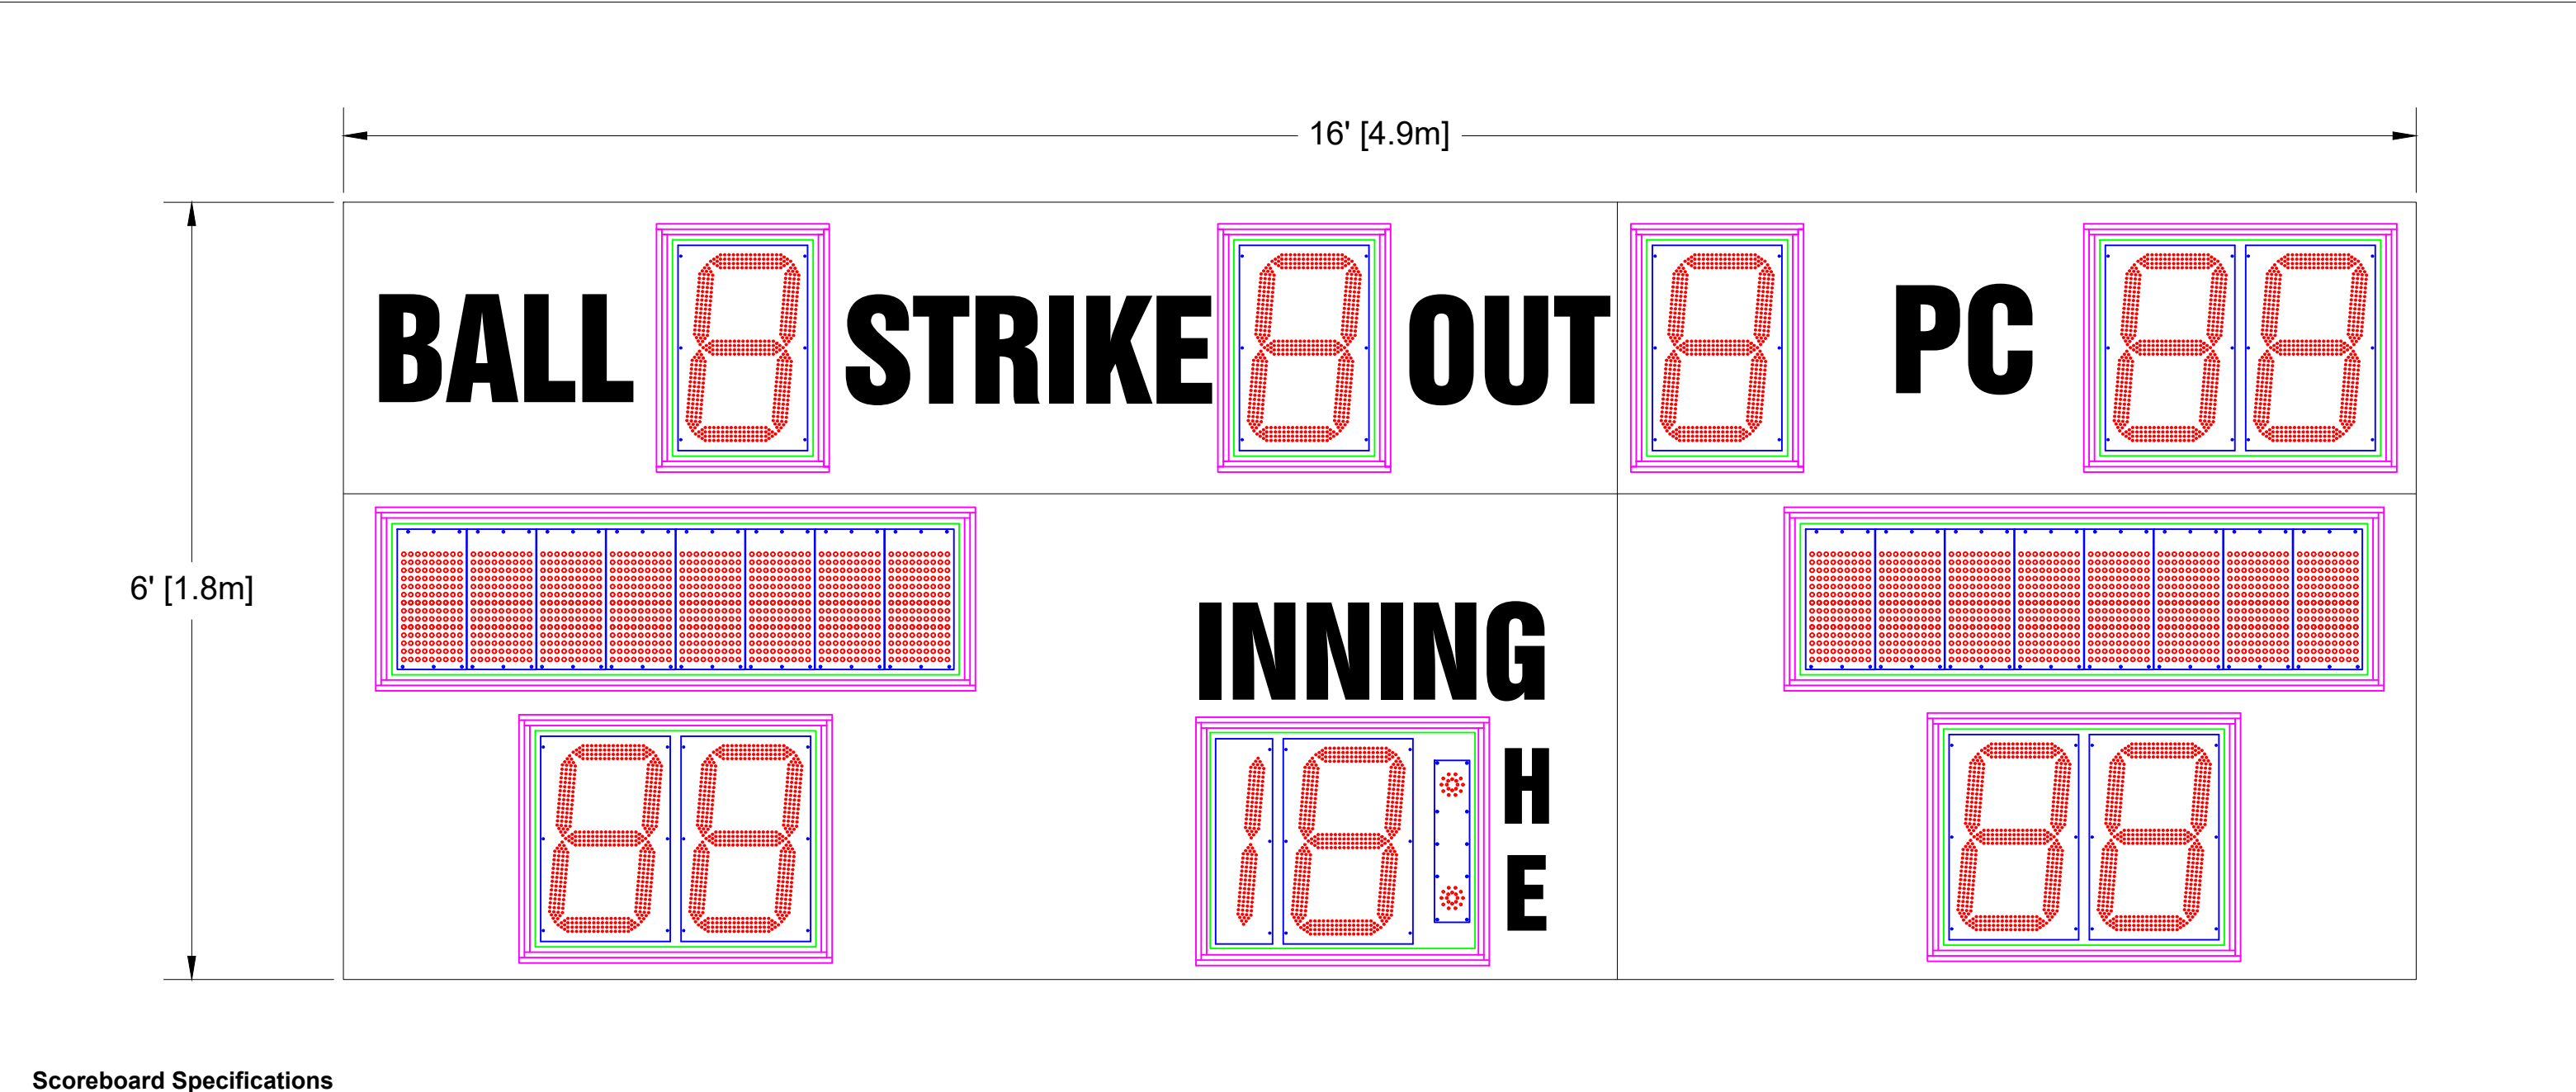

Scoreboard Specifications

Overall size: 16' (W) x 6' (H) x 6" (D)
Approximate Weight: 572 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the INNING Digit.

17" LED Digits for INNING, BALL, STRIKE, OUT, PITCH COUNT
10" Electronic Team Names at 8 CH
2" LED Dots for H, E


10" White Vinyl Lettering for BALL, STRIKE, OUT, INNING, PC
7" White Vinyl Lettering for H, E

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/28/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°	
THIRD ANGLE PROJECTIONS		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M7116BxCE-PC		OES SCOREBOARDS	
SIZE B	FILENAME M7116BUXE-PC	INIT DRAWING DATE 3/28/21	REV A
USAGE USE FOR REVIEW			
SCALE NTS	DRAWN BY MLI	PAGE 1 OF 1	

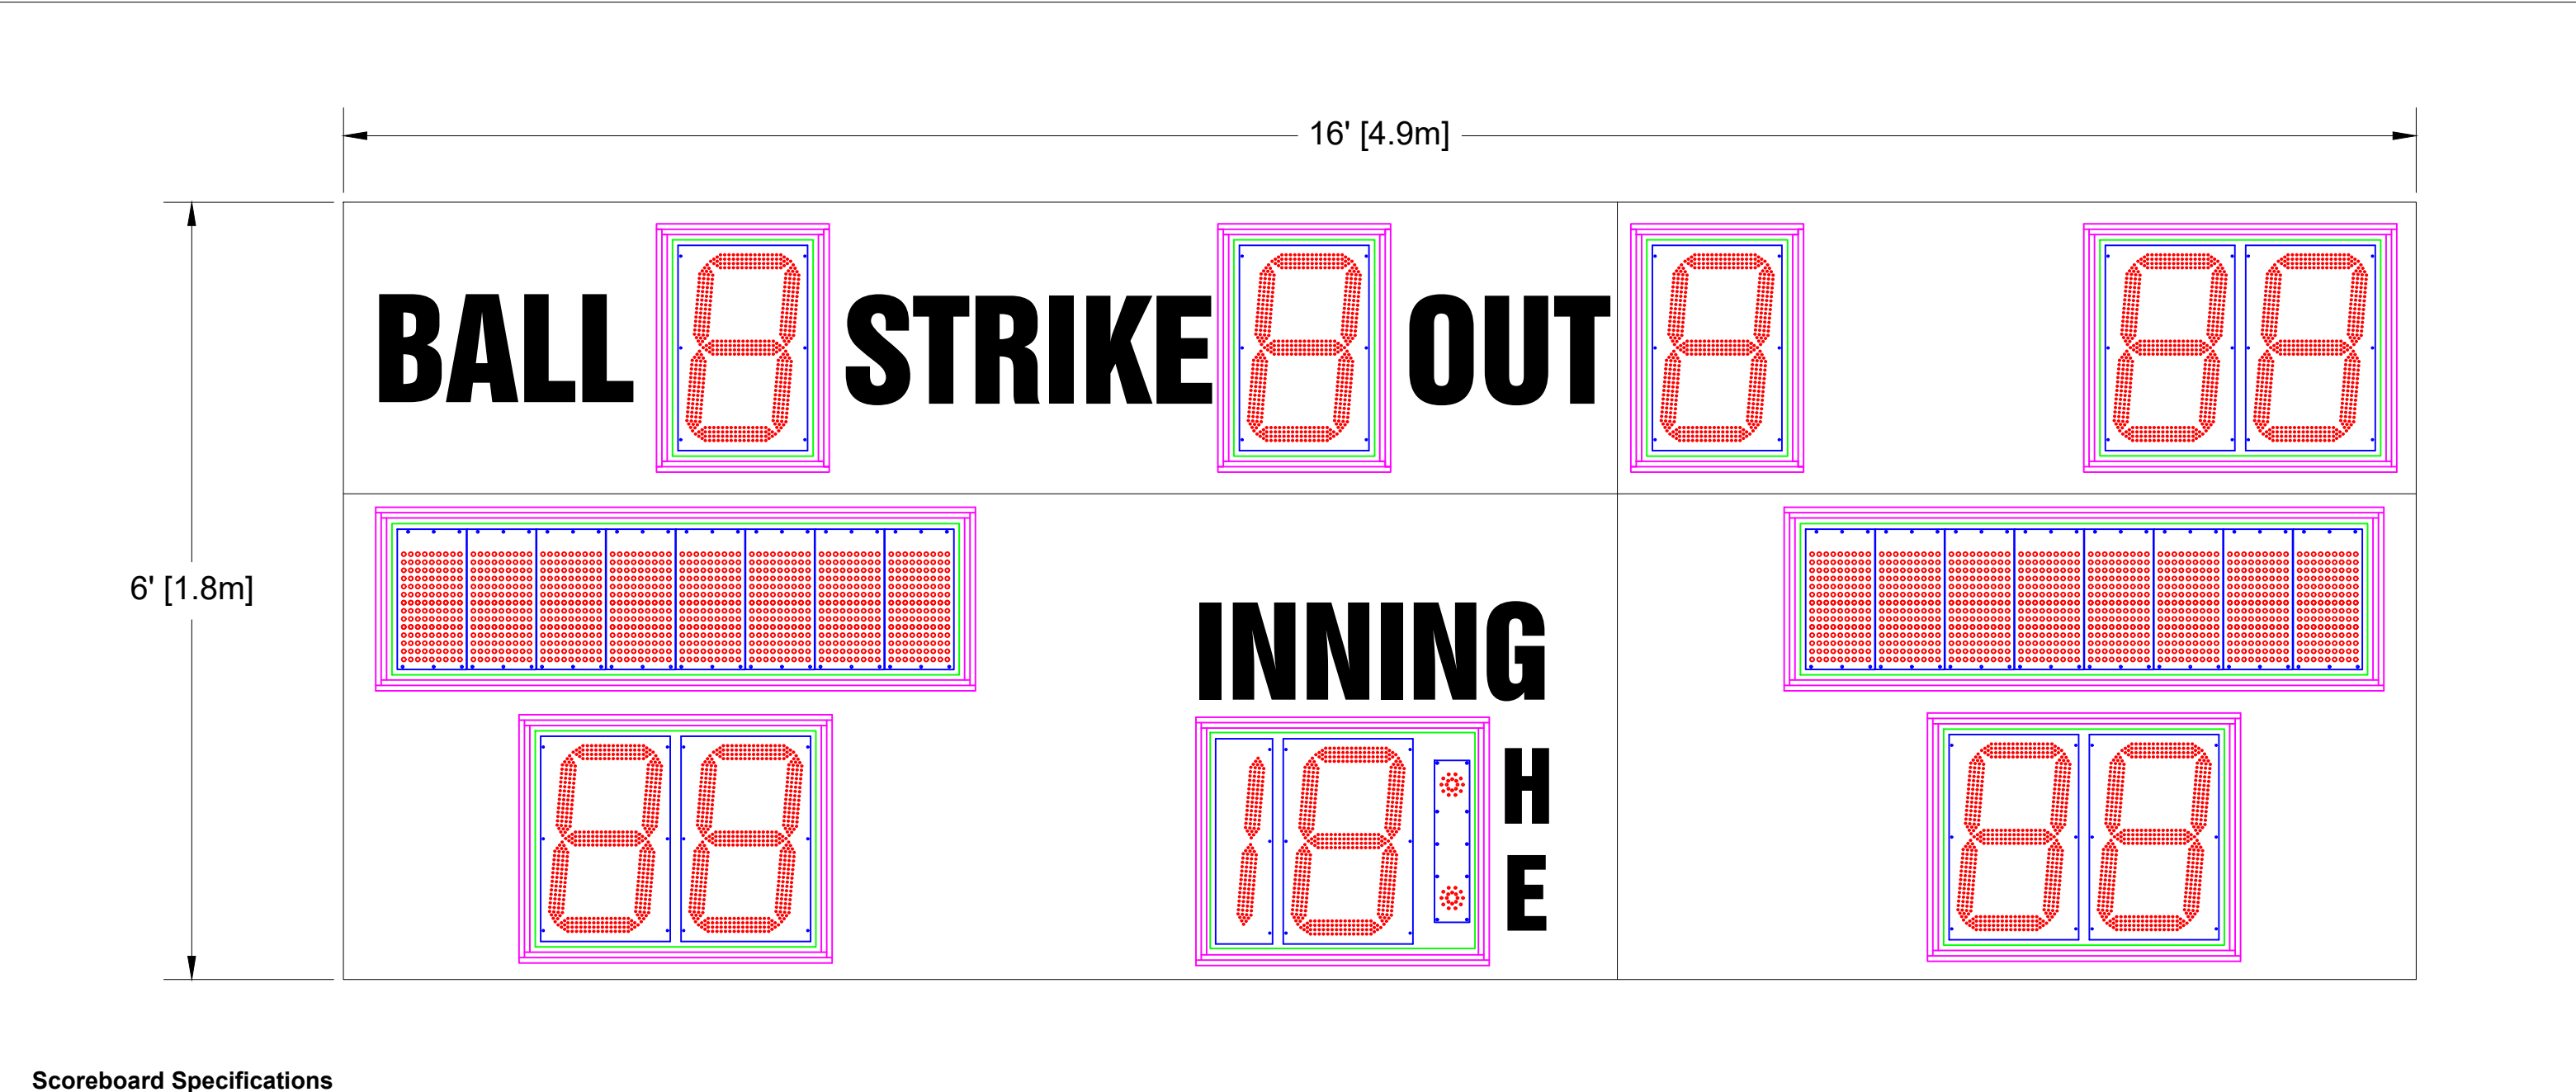

Scoreboard Specifications

Overall size: 16' (W) x 6' (H) x 6" (D)
Approximate Weight: 572 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the INNING Digit.

17" LED Digits for INNING, BALL, STRIKE, OUT, TIMER
10" Electronic Team Names at 8 CH
2" LED Dots for H, E


10" White Vinyl Lettering for BALL, STRIKE, OUT, INNING
7" White Vinyl Lettering for H, E

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/28/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°	
THIRD ANGLE PROJECTIONS		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M7116BxCE-TM		OES SCOREBOARDS	
SIZE B	FILENAME M7116BUXE-TM	INIT DRAWING DATE 3/28/21	REV A
USAGE USE FOR REVIEW			
SCALE NTS	DRAWN BY MLI	PAGE 1 OF 1	

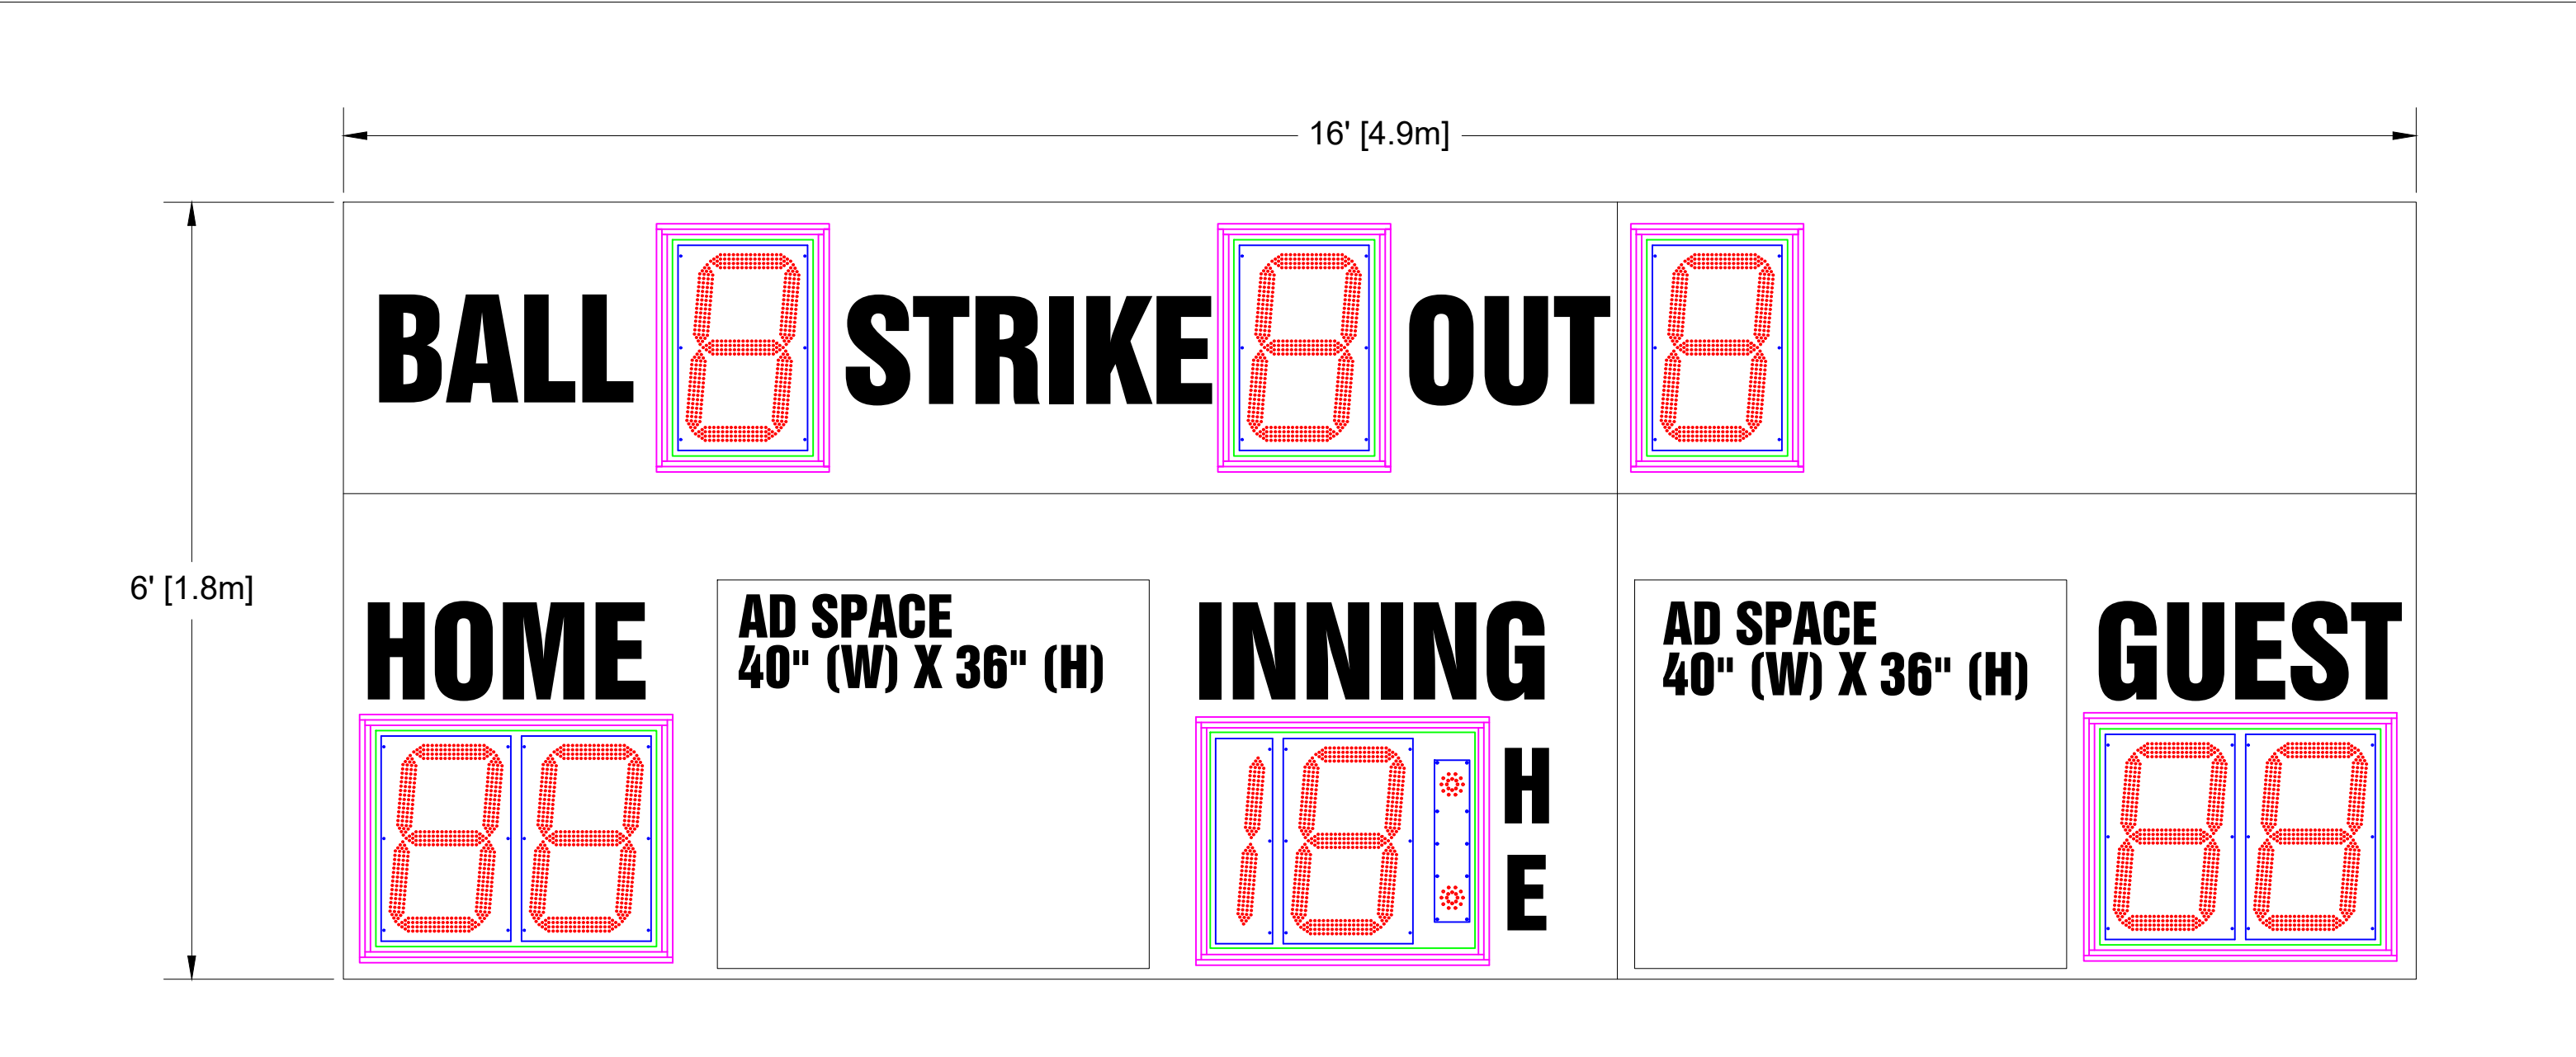

Scoreboard Specifications

Overall size: 16' (W) x 6' (H) x 6" (D)
Approximate Weight: 572 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the INNING Digit.


17" LED Digits for HOME, INNING, GUEST, BALL, STRIKE, OUT
2" LED Dots for H, E

10" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, INNING, GUEST
7" White Vinyl Lettering for H, E

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/15/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES ELECTRONIC SCOREBOARDS M7116BxCV	
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7116BUXV	3/15/21	A
USE FOR REVIEW			
SCALE	NTS	DRAWN BY	PAGE
		MLI	1 OF 1

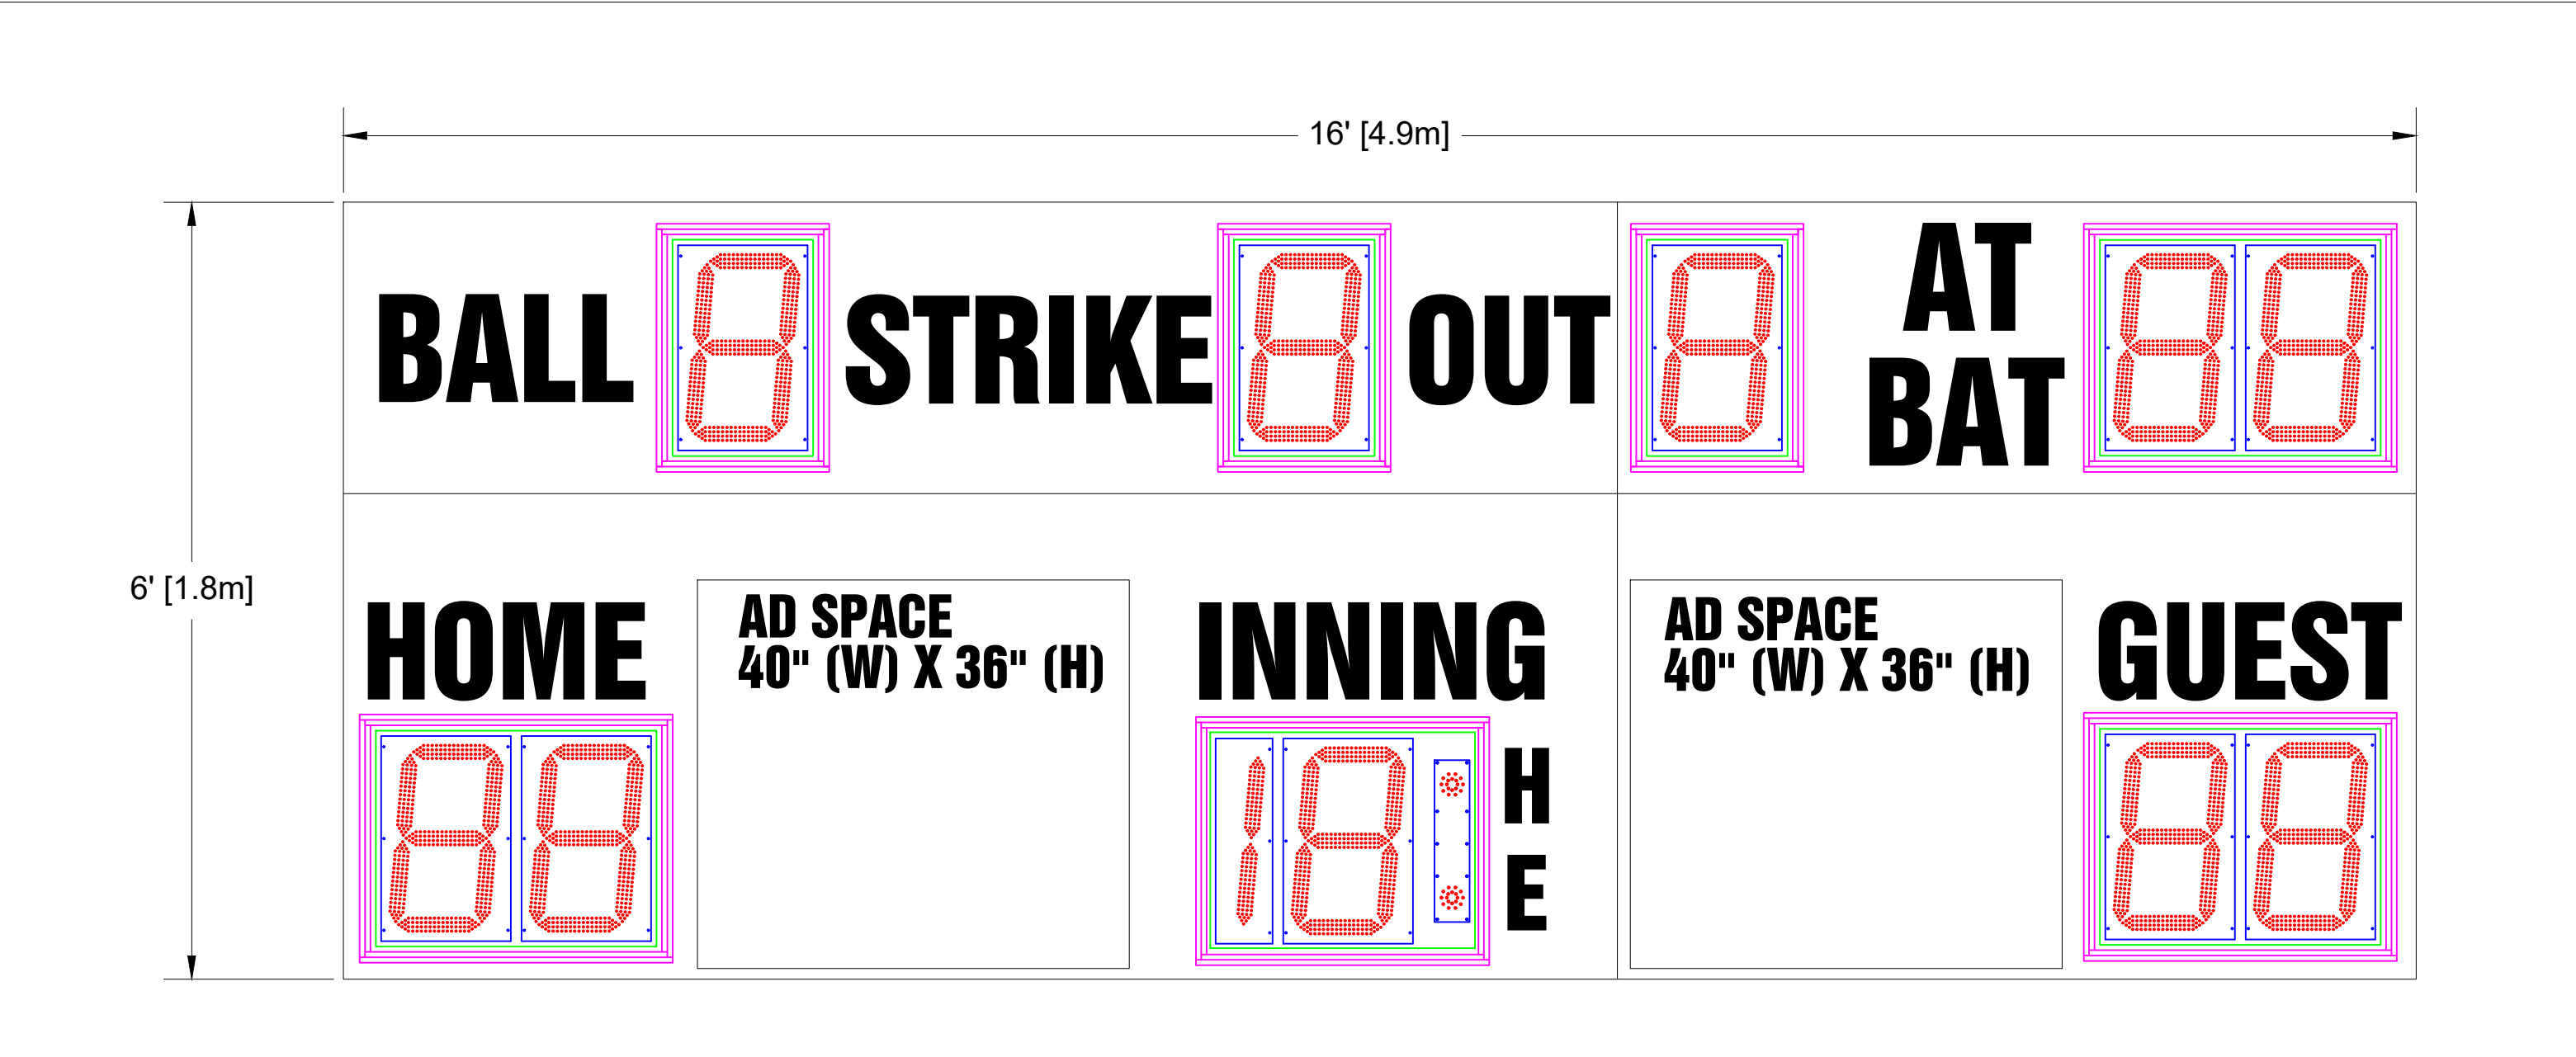

Scoreboard Specifications

Overall size: 16' (W) x 6' (H) x 6" (D)
Approximate Weight: 572 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the INNING Digit.

17" LED Digits for HOME, INNING, GUEST, BALL, STRIKE, OUT, AT BAT
2" LED Dots for H, E

10" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, INNING, GUEST, AT BAT
7" White Vinyl Lettering for H, E


This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/14/2021

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>		<div><div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div></div>	

DESCRIPTION					
OES ELECTRONIC SCOREBOARDS M7116BxCV-AB					
SIZE B	FILENAME M7116BUXV-AB		INIT DRAWING DATE 3/14/21		REV A
	USAGE USE FOR REVIEW				
SCALE NTS		DRAWN BY MLI		PAGE 1 OF 1	

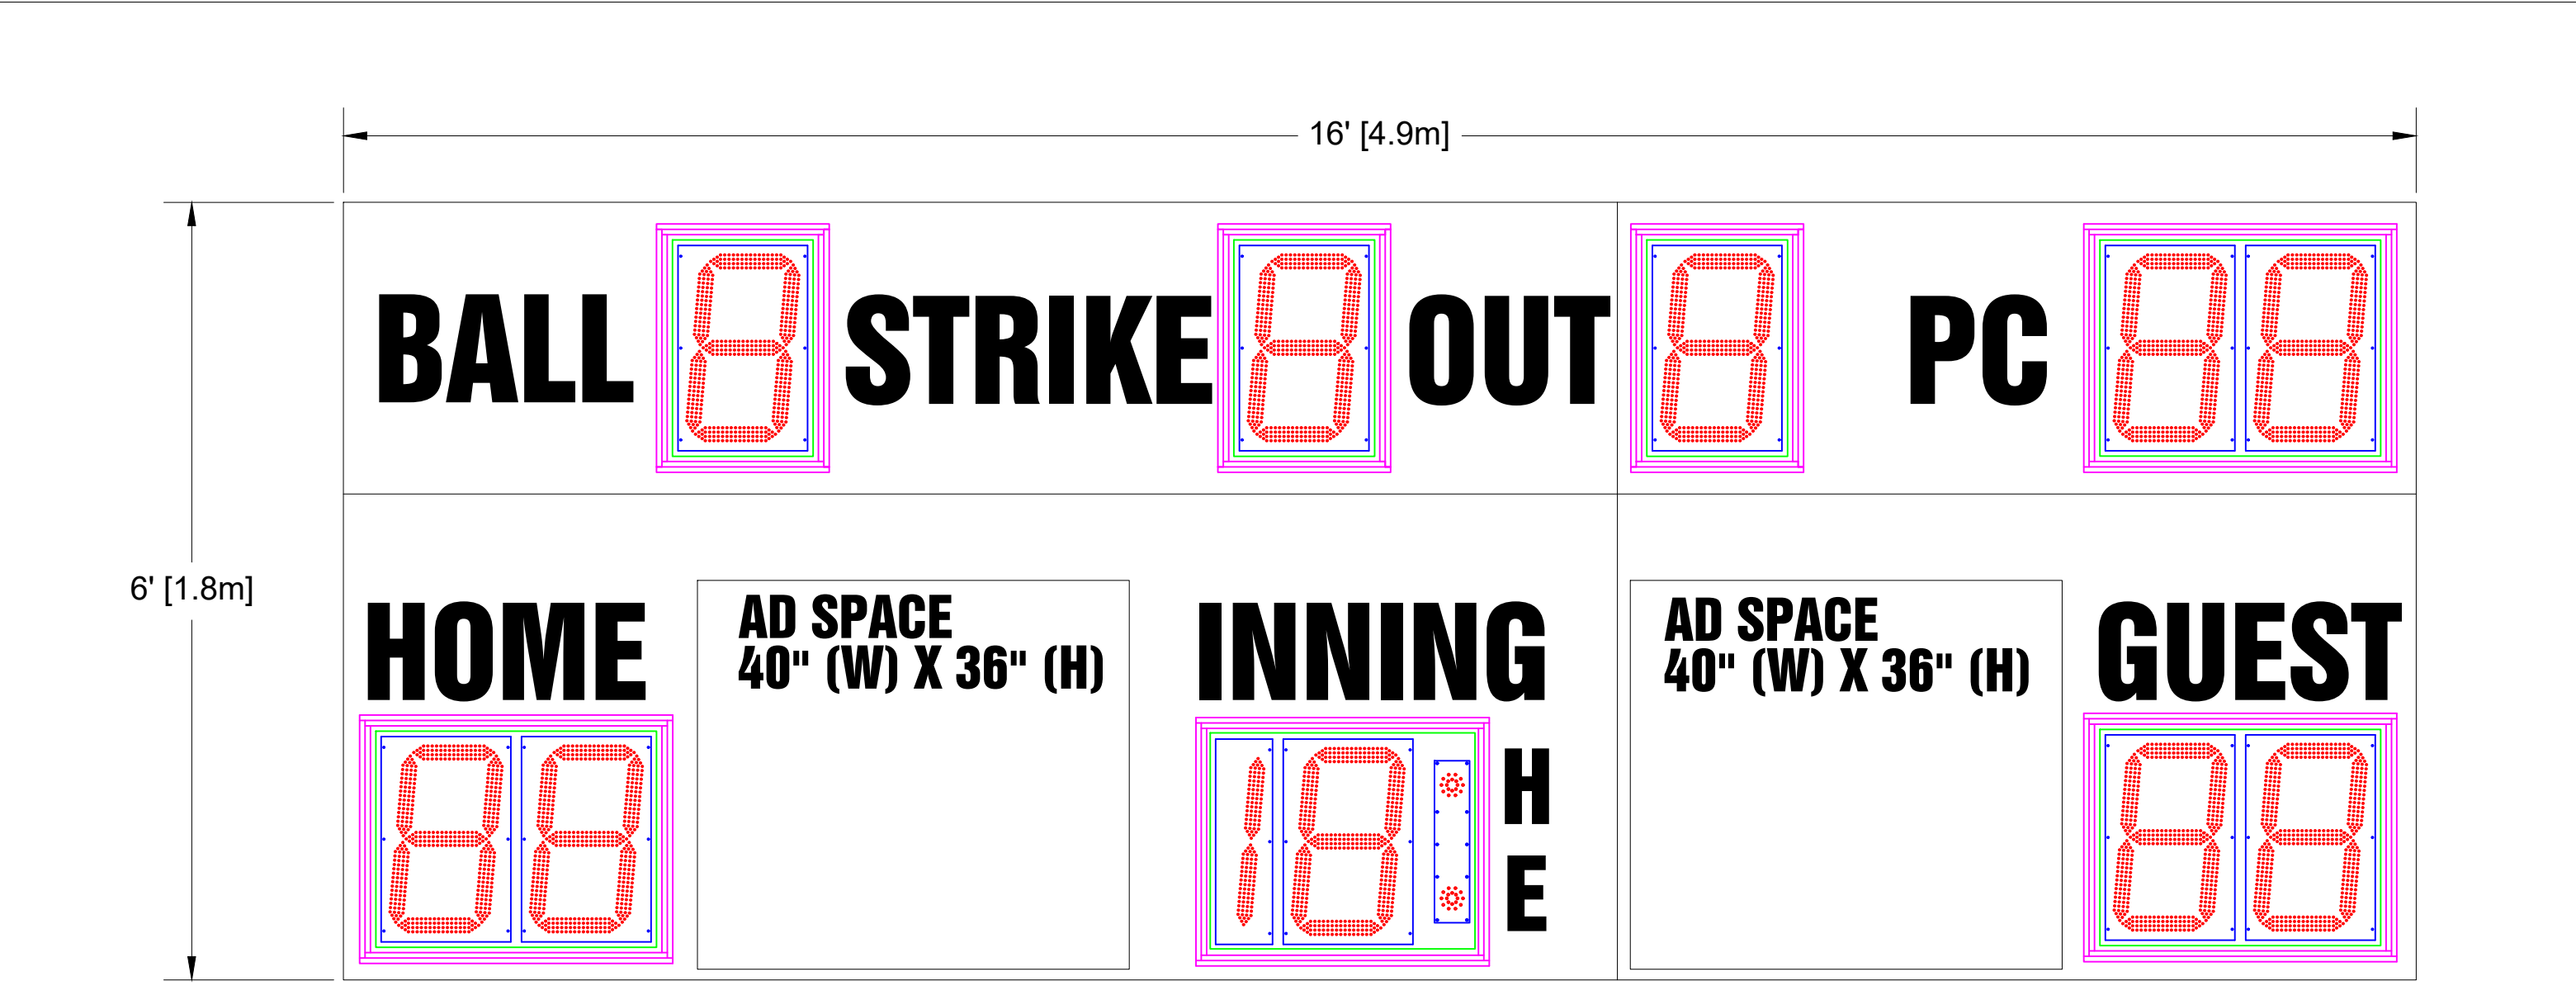

Scoreboard Specifications

Overall size: 16' (W) x 6' (H) x 6" (D)
Approximate Weight: 572 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the INNING Digit.

17" LED Digits for HOME, INNING, GUEST, BALL, STRIKE, OUT, PITCH COUNT
2" LED Dots for H, E


10" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, INNING, GUEST, PITCH COUNT 7" White Vinyl Lettering for H, E

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/11/2021

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional $\pm 1/16"$ Two Place Decimals $\pm 0.02"$ Three Place Decimals $\pm 0.005"$ Four Place Decimals $\pm 0.0005"$ Angular $\pm 30^\circ$</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>		<div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
				DESCRIPTION OES ELECTRONIC SCOREBOARDS M7116BxCV-PC	
				SIZE B	FILENAME M7116BUXV-PC
		USAGE USE FOR REVIEW			
SCALE NTS		DRAWN BY MLI		PAGE 1 OF 1	

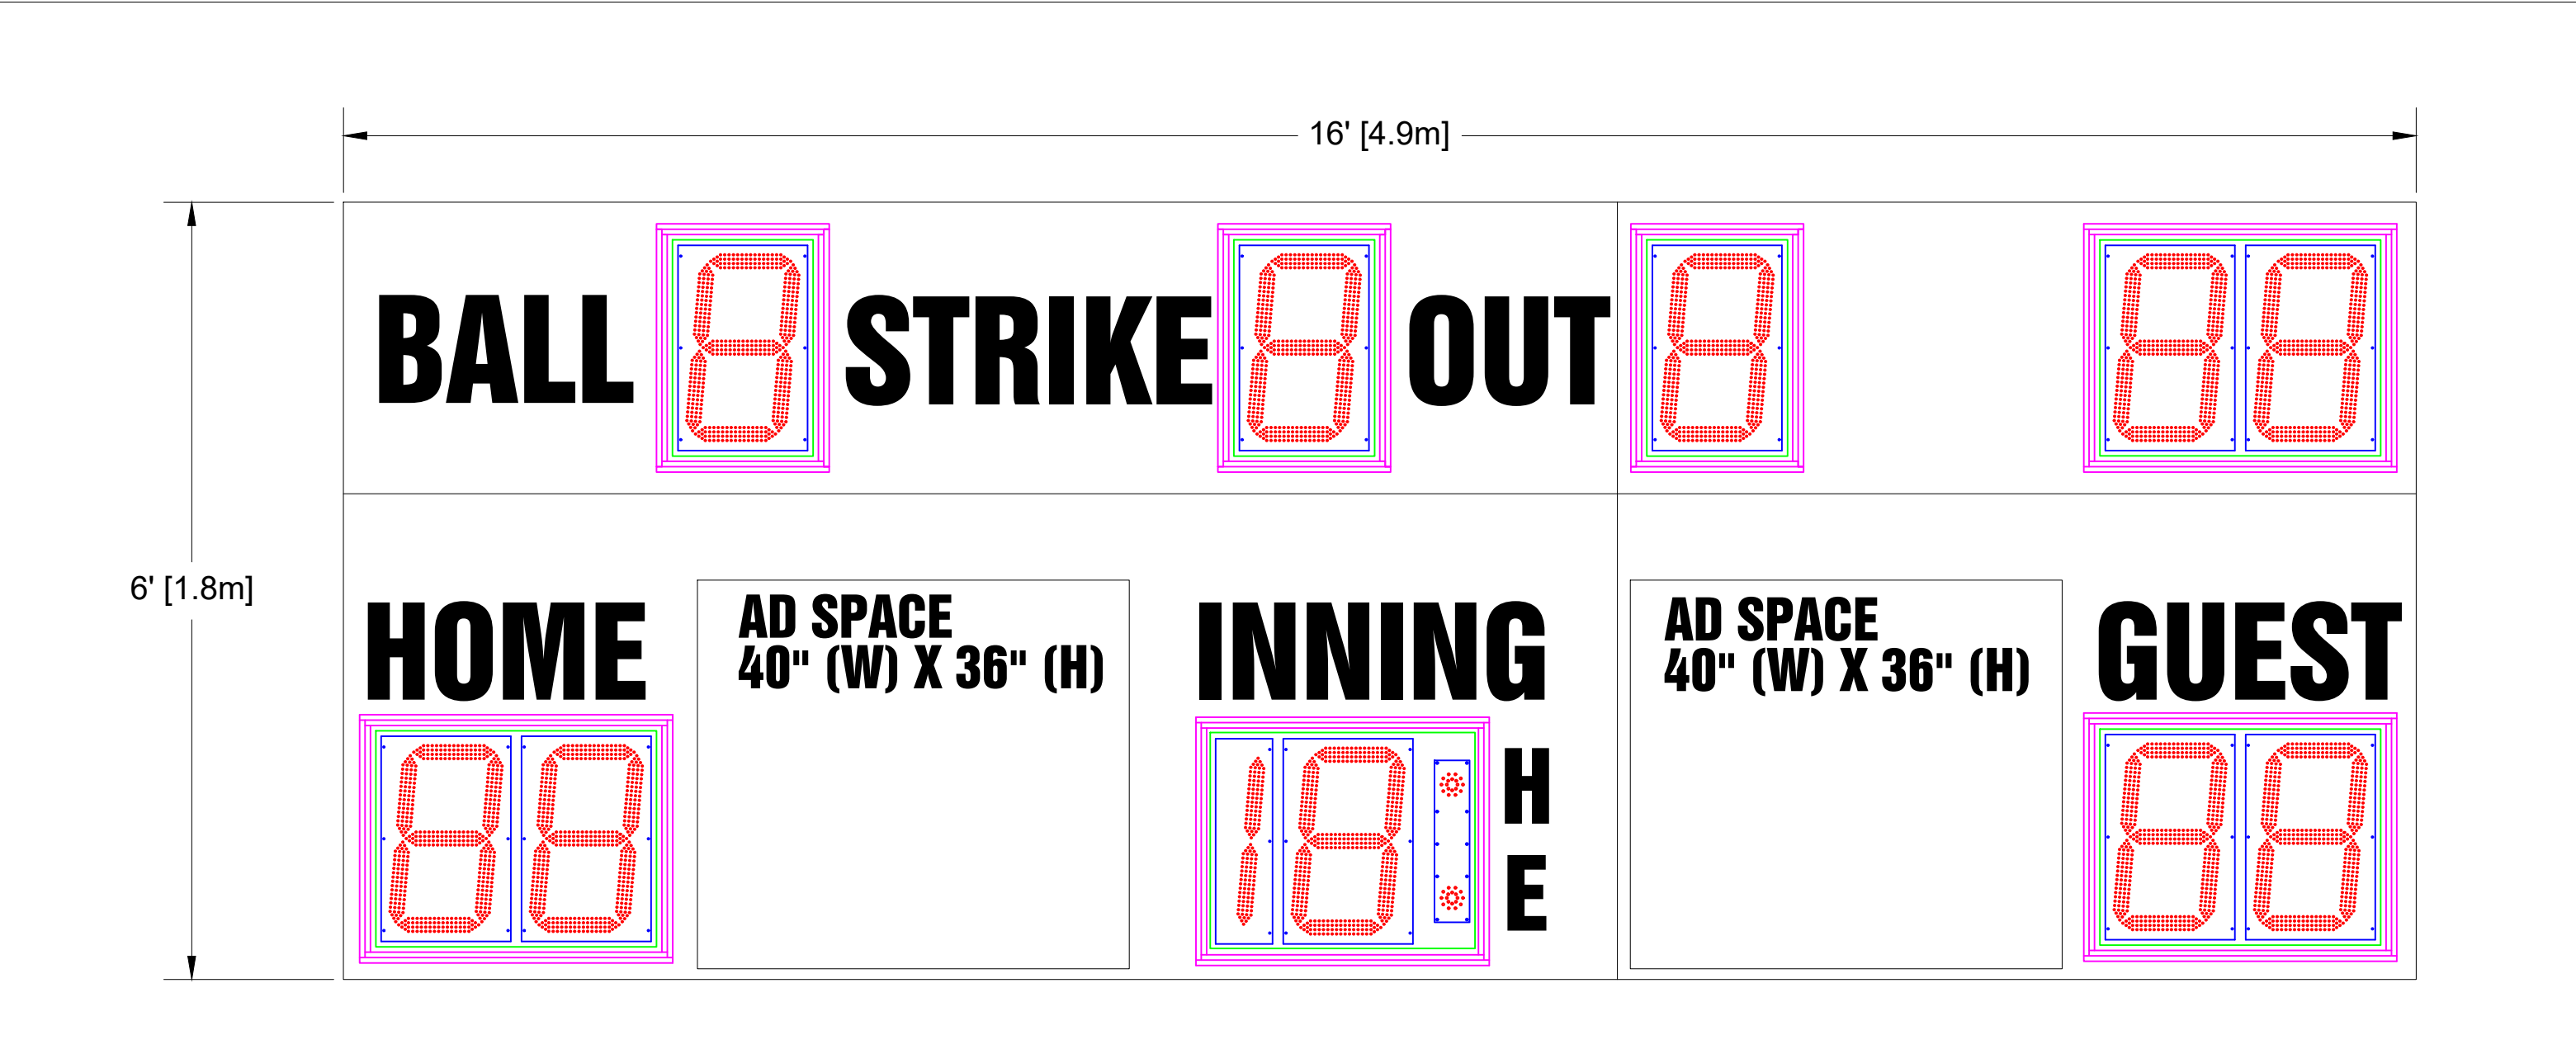

Scoreboard Specifications

Overall size: 16' (W) x 6' (H) x 6" (D)
Approximate Weight: 572 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the INNING Digit.

17" LED Digits for HOME, INNING, GUEST, BALL, STRIKE, OUT, TIMER
2" LED Dots for H, E

10" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, INNING, GUEST
7" White Vinyl Lettering for H, E

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/14/2021

		<div><div></div><div>OES SCOREBOARDS</div></div> <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div><div>TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div><div>THIRD ANGLE PROJECTIONS </div></div>		<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M7116BxCV-TM</div>	
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7116BUXV-TM	3/14/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE
		MLI	1 OF 1