

Scoreboard Specifications



Overall size: 18' (W) x 8" (H) x 6" (D)
Approximate Weight: 449 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the INNING Digit.


22" LED Digits for All Digits
10" Electronic Team Names at 8 CH
2" LED Dots for H, E

10" White Vinyl Lettering for BALL, STRIKE, OUT, INNING
7" White Vinyl Lettering for H, E

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/28/2021

		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M7118BxCE</div>	
<div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30'</div>		<div>THIRD ANGLE PROJECTIONS</div> 	<div>SIZE</div> <div>B</div> <div>FILENAME</div> <div>M7118BUXE</div> <div>INIT DRAWING DATE</div> <div>3/28/21</div> <div>REVISION</div> <div>A</div>
<div>SCALE</div> <div>NTS</div>		<div>DRAWN BY</div> <div>CGTHOMPSON</div> <div>PAGE</div> <div>1 OF 1</div>	

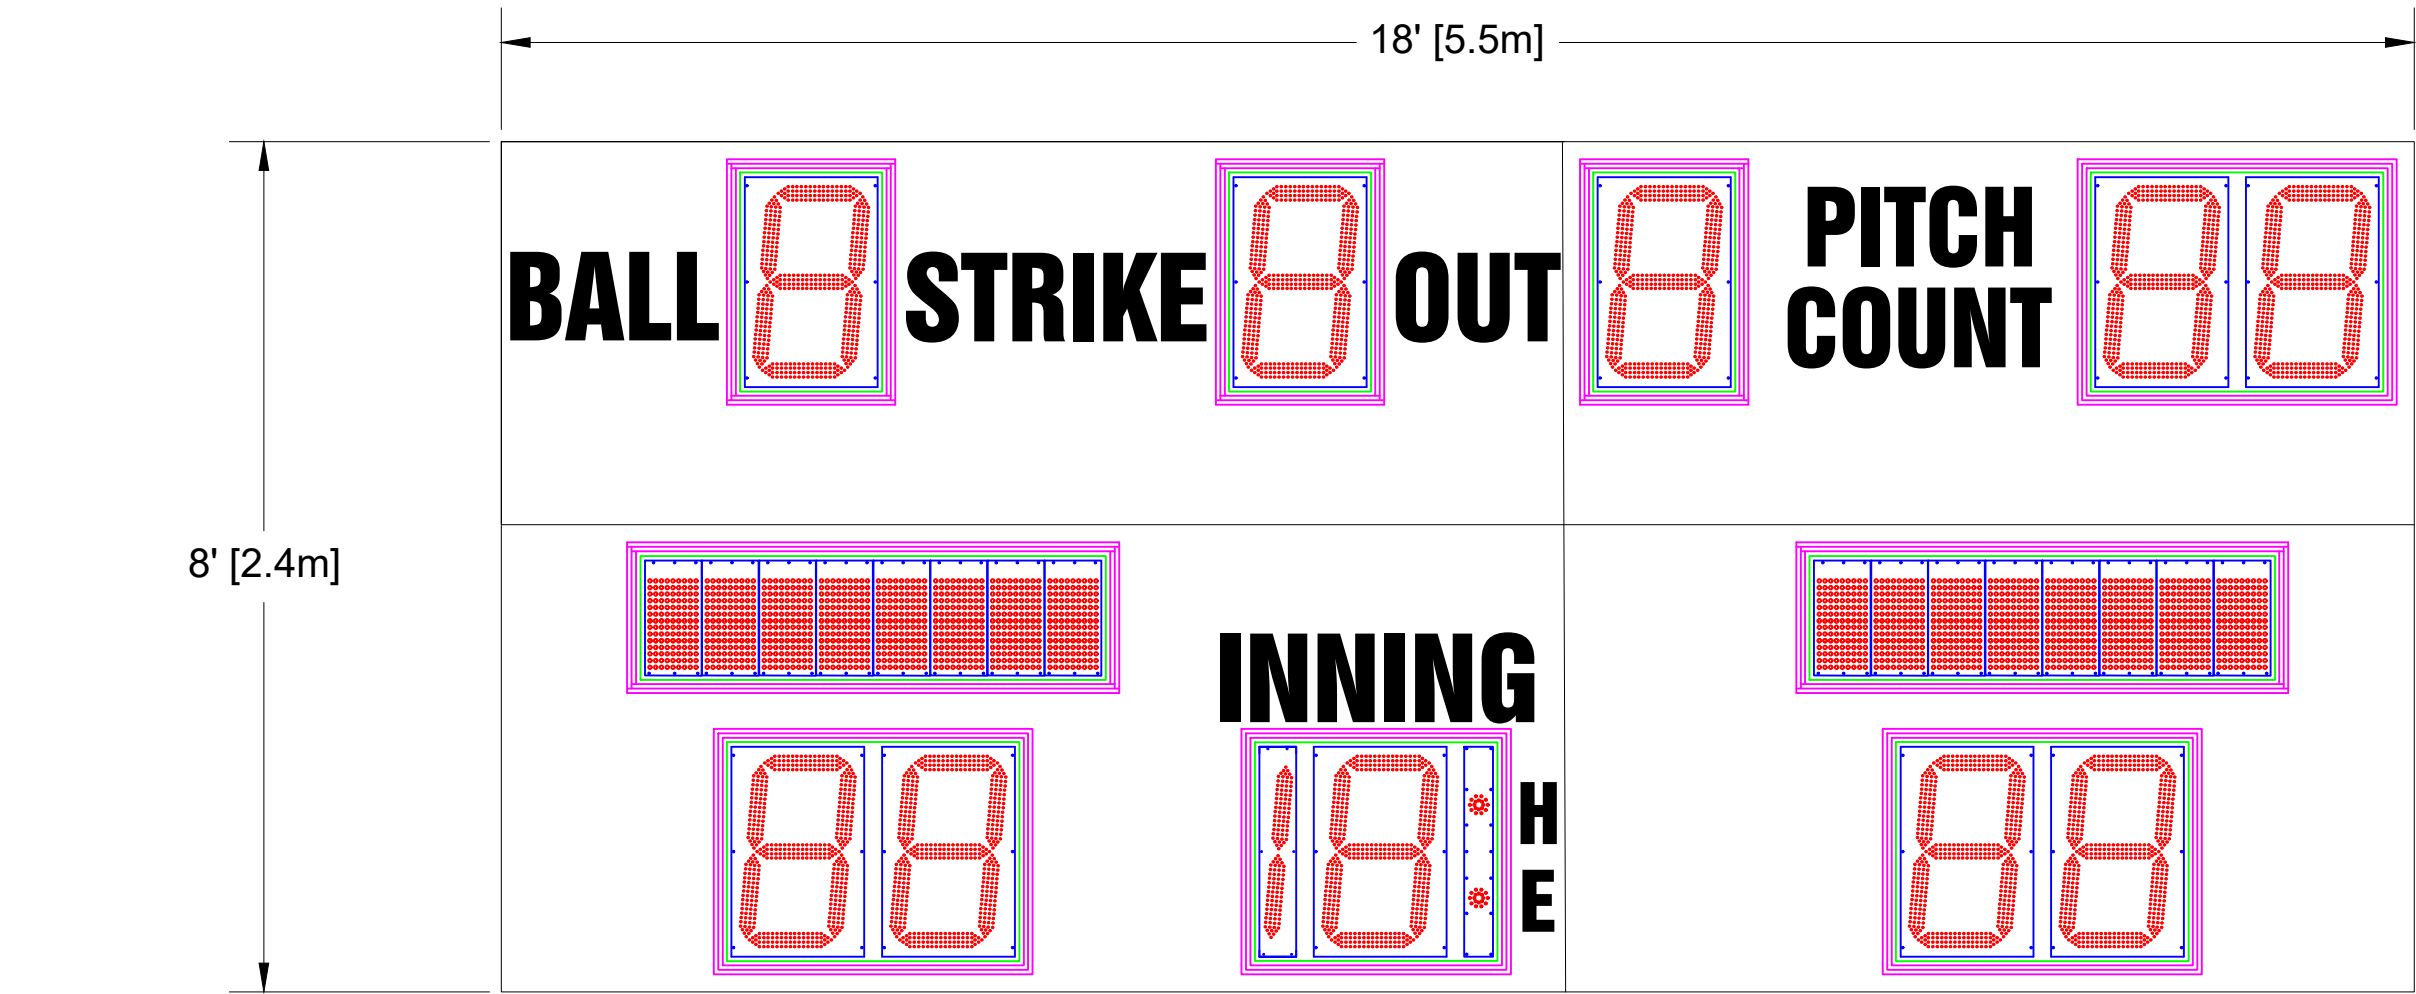

Scoreboard Specifications

Overall size: 18' (W) x 8" (H) x 6" (D)
Approximate Weight: 449 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the INNING Digit.

22" LED Digits for All Digits
10" Electronic Team Names at 8 CH
2" LED Dots for H, E

10" White Vinyl Lettering for BALL, STRIKE, OUT, INNING
9" White Vinyl Lettering for PITCH COUNT
7" White Vinyl Lettering for H, E

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/28/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°


THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION
**OES ELECTRONIC SCOREBOARDS
M7118BxCE-PC**

SIZE	FILENAME M7118BUXE-PC	INIT DRAWING DATE 3/28/21	REV
B	USAGE USE FOR REVIEW		A

SCALE **NTS** DRAWN BY **CGTHOMPSON** PAGE 1 OF 1

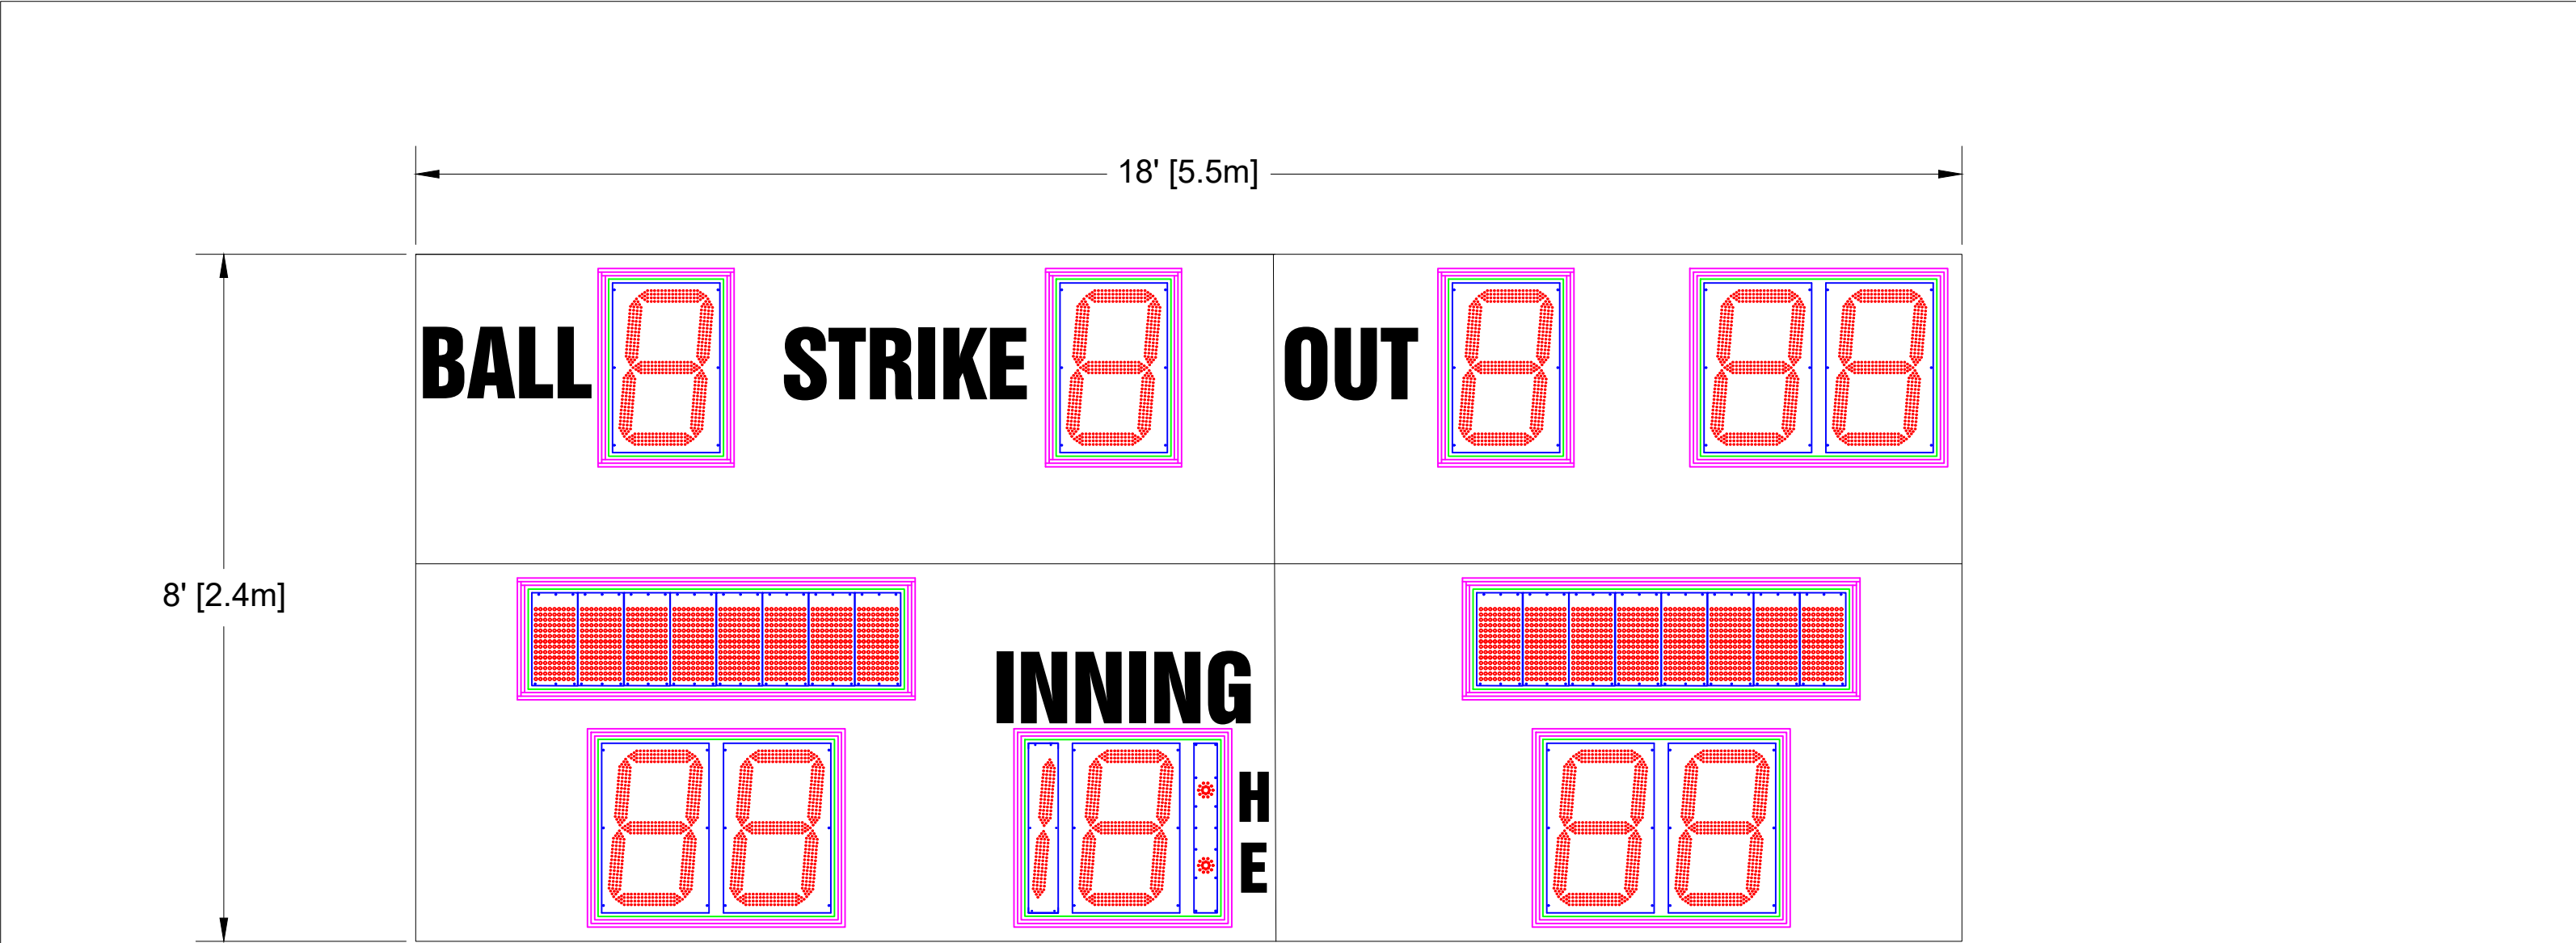

Scoreboard Specifications


Overall size: 18' (W) x 8" (H) x 6" (D)
Approximate Weight: 449 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the INNING Digit.


22" LED Digits for All Digits
10" Electronic Team Names at 8 CH
2" LED Dots for H, E


10" White Vinyl Lettering for BALL, STRIKE, OUT, INNING
7" White Vinyl Lettering for H, E

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/28/2021

		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>			
		DESCRIPTION OES ELECTRONIC SCOREBOARDS M7118BxCE-TM			
SIZE	FILENAME M7118BUXE-TM	INIT DRAWING DATE 3/28/21		REV A	
B	USAGE USE FOR REVIEW				
SCALE	NTS	DRAWN BY	CGTHOMPSON		PAGE 1 OF 1

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		THIRD ANGLE PROJECTIONS 	
TOLERANCE INFORMATION Dimensions are in Inches Fractional $\pm 1/16"$ Two Place Decimals $\pm 0.02"$ Three Place Decimals $\pm 0.005"$ Four Place Decimals $\pm 0.0005"$ Angular $\pm 30'$			

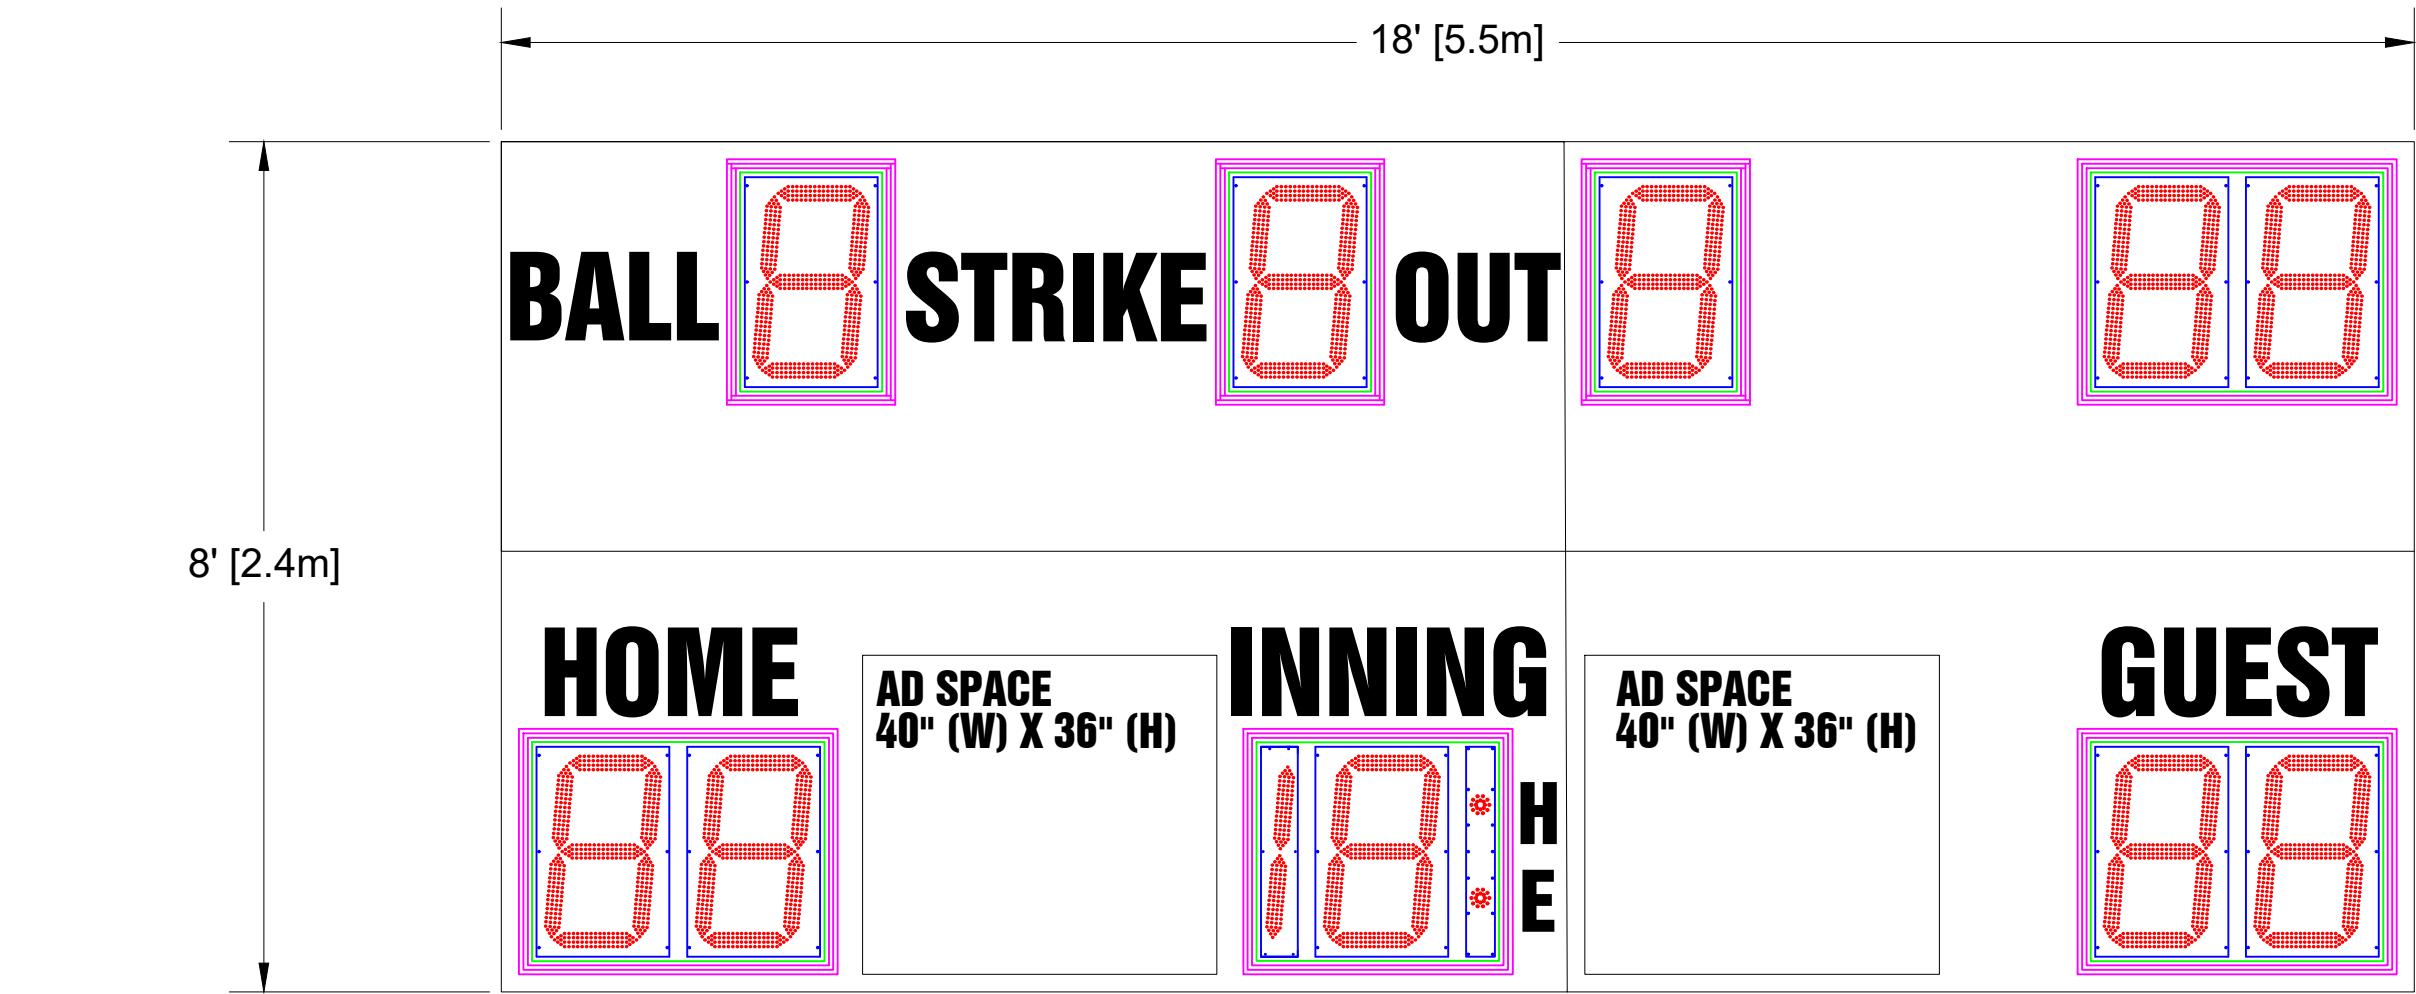

Scoreboard Specifications


Overall size: 18' (W) x 8" (H) x 6" (D)
Approximate Weight: 449 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the INNING Digit

22" LED Digits for All Digits
2" LED Dots for H, E

10" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, INNING, GUEST
7" White Vinyl Lettering for H, E

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/15/2021
		<div><div></div><div><div>OES</div><div>SCOREBOARDS</div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
		DESCRIPTION OES ELECTRONIC SCOREBOARDS M7118BxCV-LP	
SIZE	FILENAME M7118BUXV-LP	INIT DRAWING DATE 3/15/21	REV
B	USAGE USE FOR REVIEW		A
SCALE	NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1

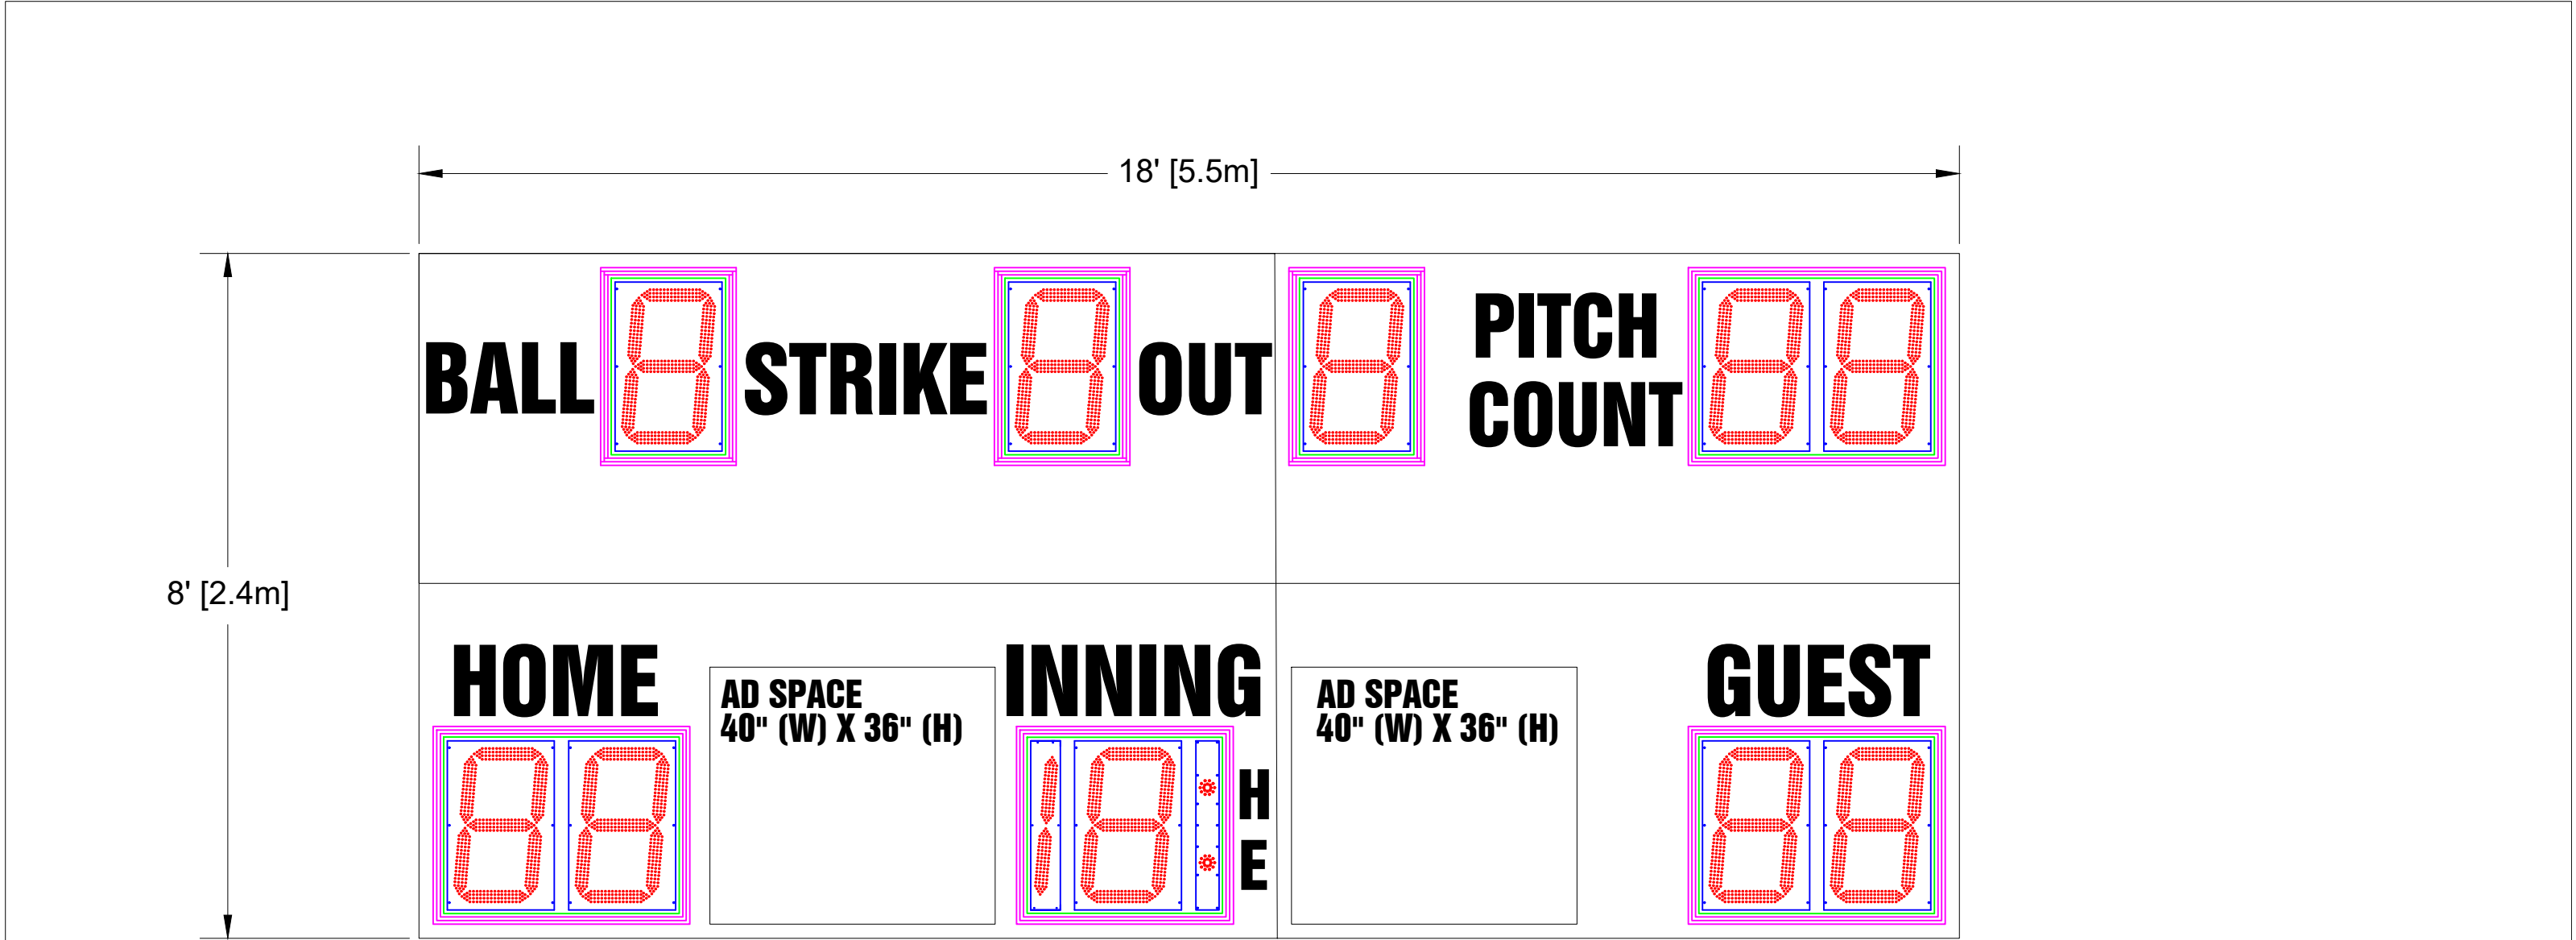

Scoreboard Specifications


Overall size: 18' (W) x 8" (H) x 6" (D)
Approximate Weight: 449 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the INNING Digit.

22" LED Digits for All Digits
2" LED Dots for H, E


10" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, INNING, GUEST
9" White Vinyl Lettering for PITCH COUNT
7" White Vinyl Lettering for H, E


- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/15/2021

		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>
<u>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</u> OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		

DESCRIPTION				
OES ELECTRONIC SCOREBOARDS M7118BxCV-PC				
SIZE	FILENAME	INIT DRAWING DATE	REV	
B	M7118BUXV-PC	3/15/21	A	
	USAGE			
SCALE		DRAWN BY		
NTS		CGTHOMPSON		
PAGE		1 OF 1		

<u>TOLERANCE INFORMATION</u> Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°	<div>THIRD ANGLE PROJECTIONS</div> 
---	--

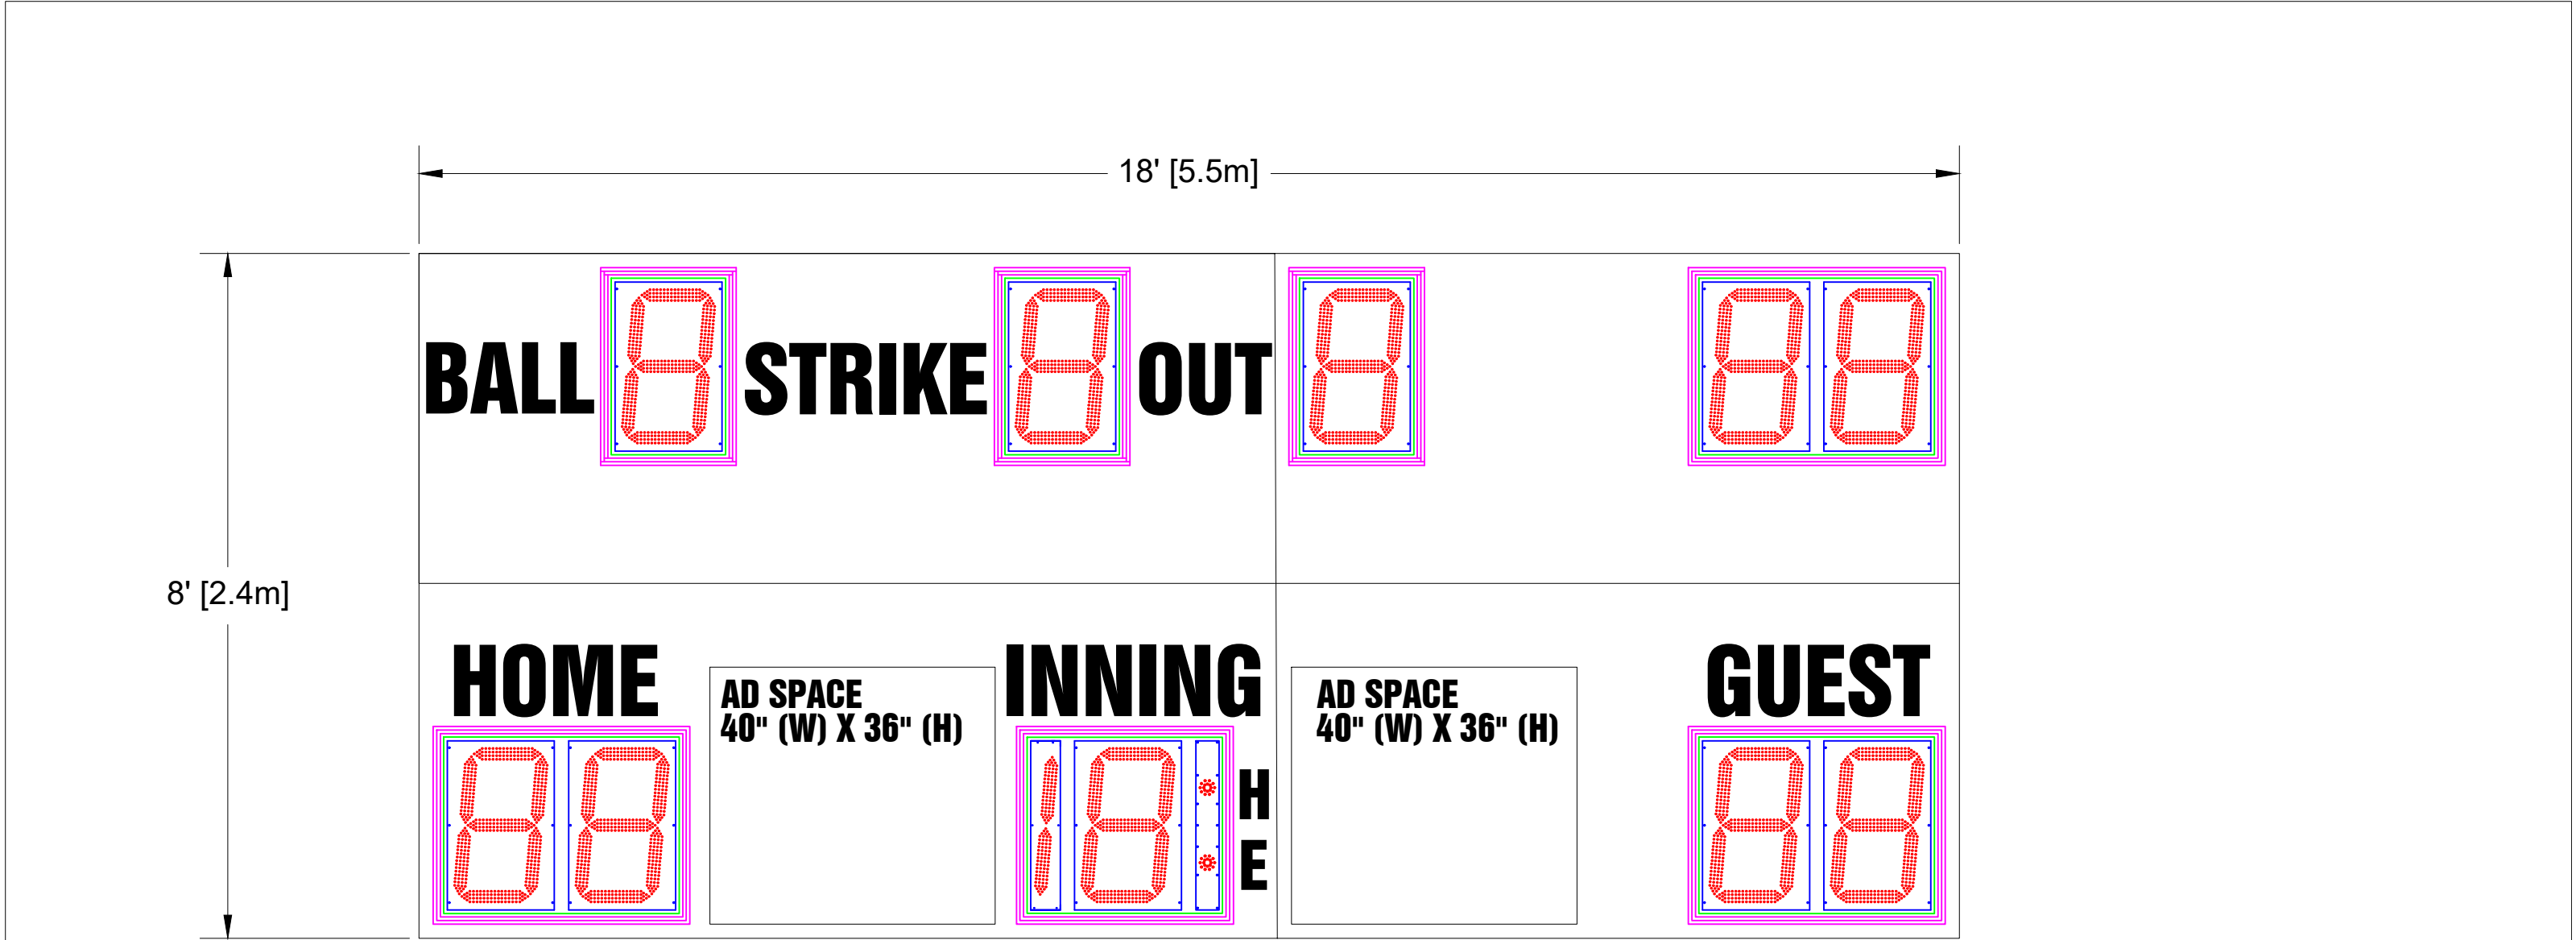



Scoreboard Specifications

Overall size: 18' (W) x 8" (H) x 6" (D)
Approximate Weight: 449 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the INNING Digit.

22" LED Digits for All Digits
2" LED Dots for H, E

10" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, INNING, GUEST
7" White Vinyl Lettering for H, E

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/15/2021
		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		DESCRIPTION OES ELECTRONIC SCOREBOARDS M7118BxCV-TM	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	SIZE B FILENAME M7118BUXV-TM INIT DRAWING DATE 3/15/21 REV A
SCALE NTS		DRAWN BY CGTHOMPSON PAGE 1 OF 1	