

Scoreboard Specifications


Overall size: 20' (W) x 7' (H) x 6" (D)
Approximate Weight: 773 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 6th Inning Digit.

- 17" LED Digits for BALL, STRIKE, OUT
 - 14" LED Digits for INNINGS, RUNS
 - 10" Electronic Tean Names at 8 CH
- 9" White Vinyl Lettering for INNINGS, RUNS
12" White Vinyl Lettering for BALL, STRIKE, OUT
This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/16/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES ELECTRONIC SCOREBOARDS M7120AxCE	
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7120AUXE	3/16/21	A
USE FOR REVIEW			
SCALE	NTS	DRAWN BY	PAGE
		MLI	1 OF 1

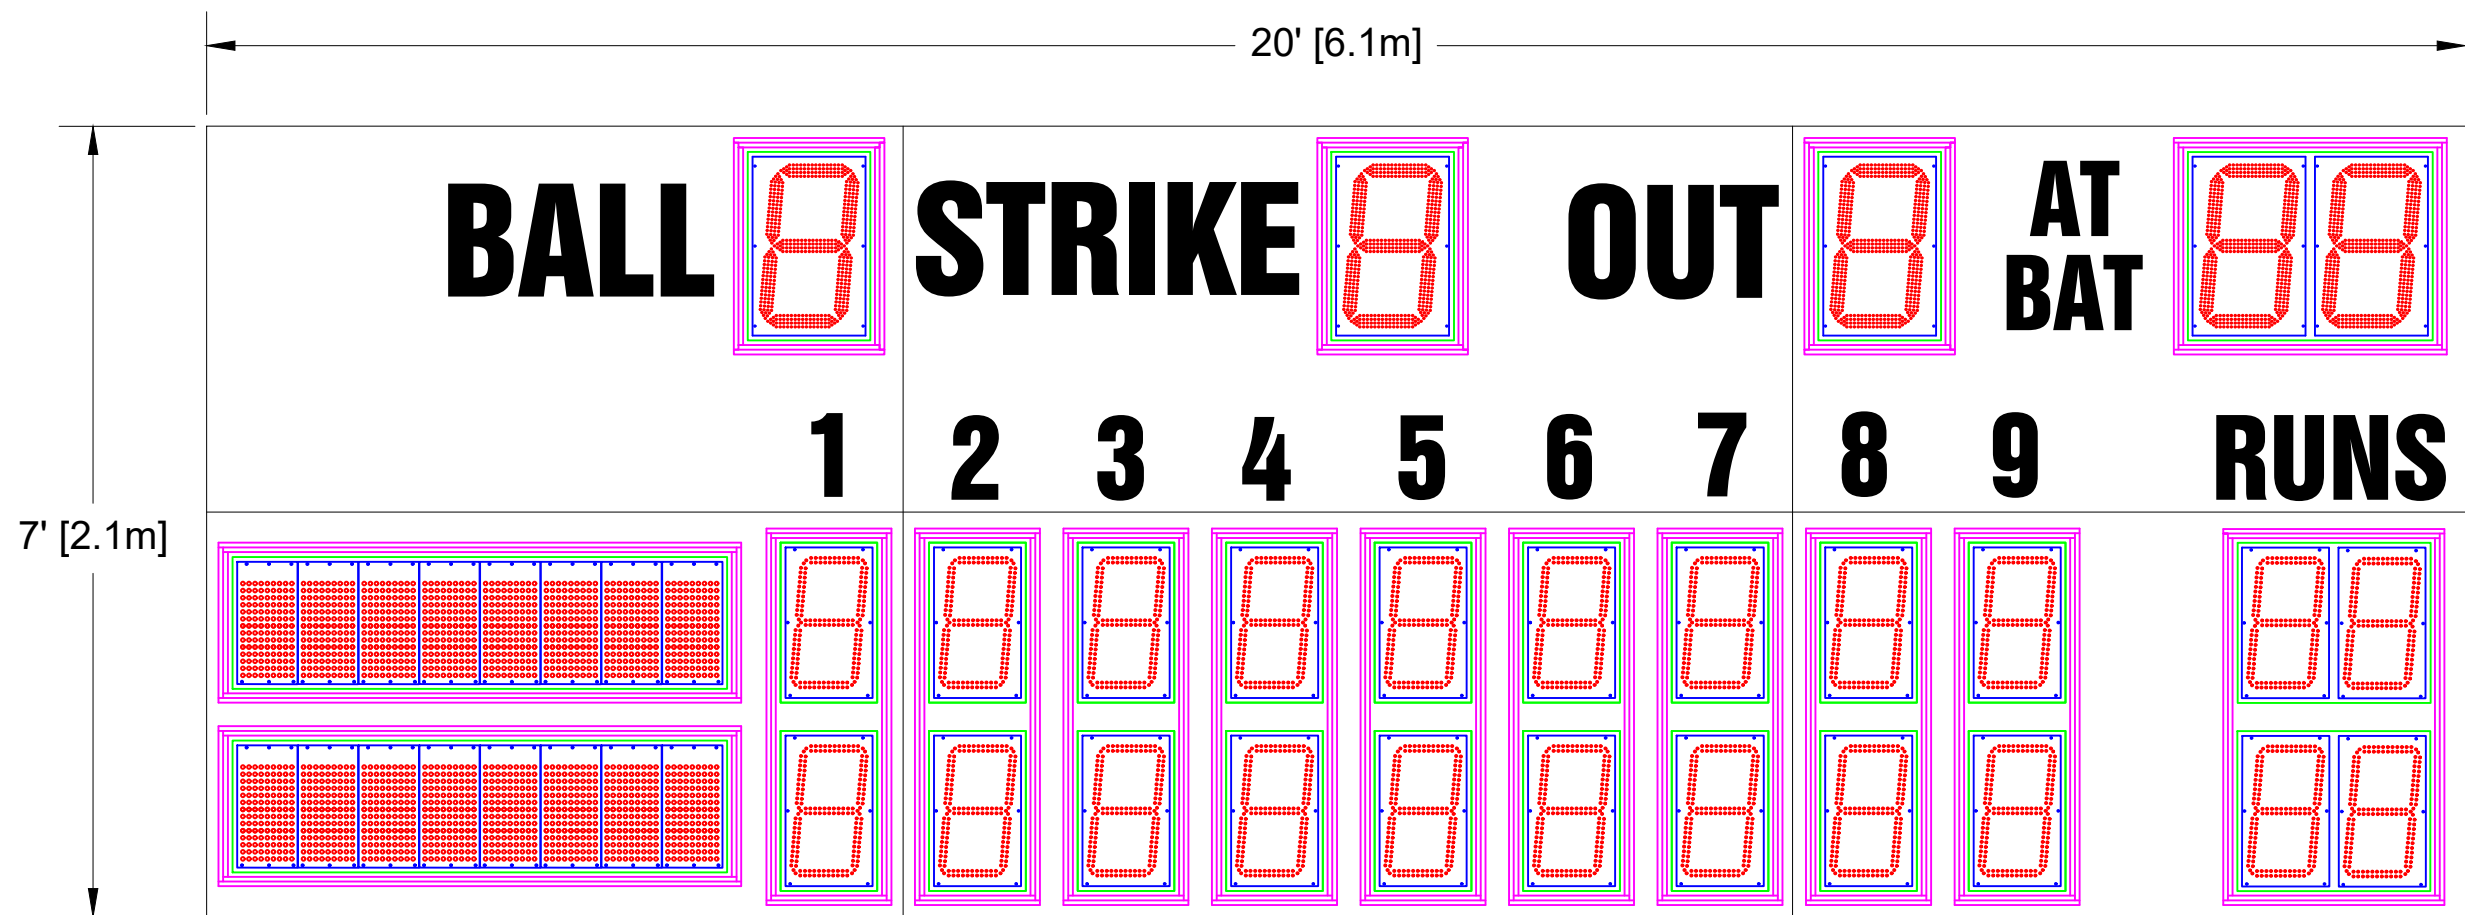

Scoreboard Specifications

Overall size: 20' (W) x 7' (H) x 6" (D)
Approximate Weight: 773 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.



Incoming Mains Power and Data Location: Behind the 6th Inning Digit.


17" LED Digits for BALL, STRIKE, OUT, AT BAT
14" LED Digits for INNINGS, RUNS
10" Electronic Team Names at 8 CH

8" White Vinyl Lettering for AT BAT
9" White Vinyl Lettering for INNINGS, RUNS
12" White Vinyl Lettering for BALL, STRIKE, OUT
This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/16/2021

		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		DESCRIPTION OES ELECTRONIC SCOREBOARDS M7120AxCE-AB	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		SIZE B	FILENAME M7120AUXE-AB USAGE USE FOR REVIEW
THIRD ANGLE PROJECTIONS 		INIT DRAWING DATE 3/16/21	REV A
SCALE NTS		DRAWN BY MLI	PAGE 1 OF 1

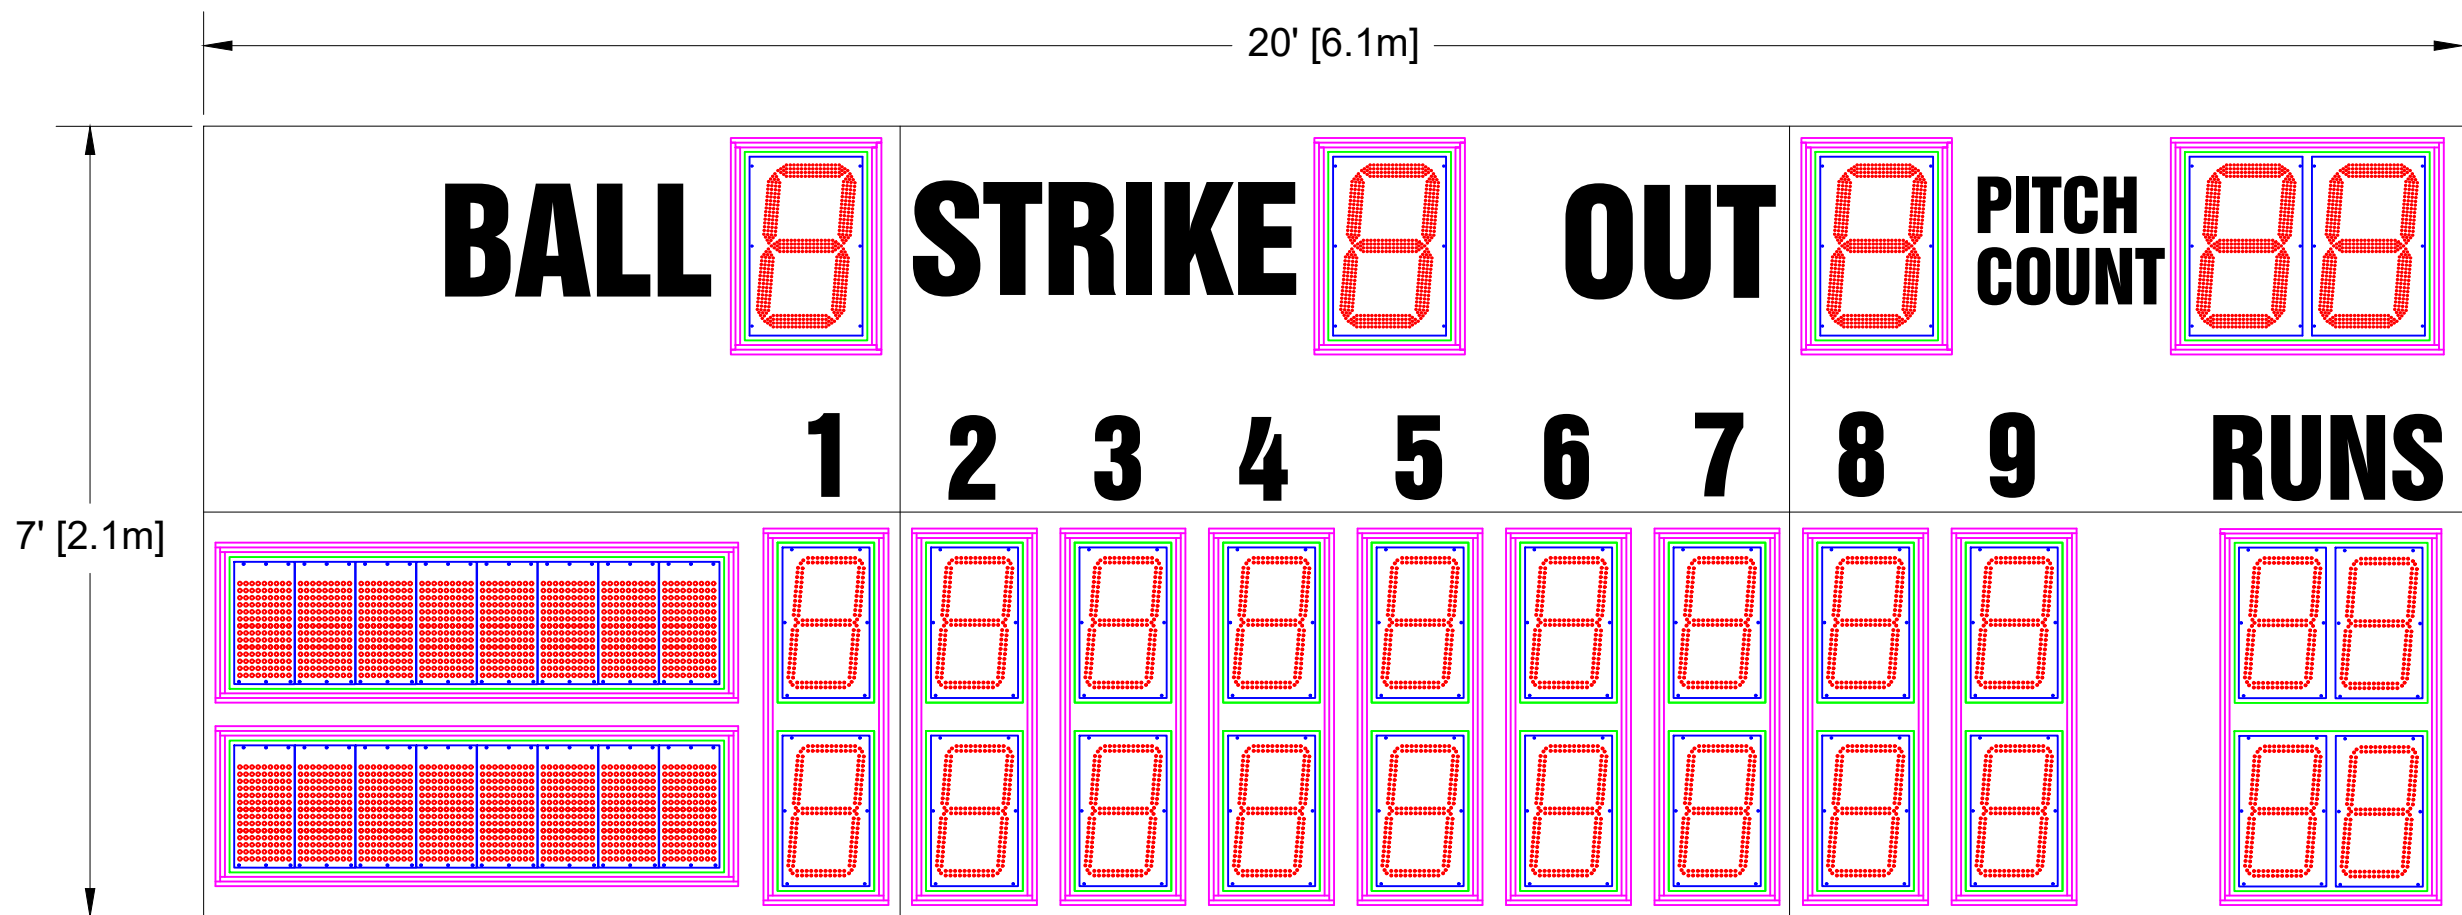

Scoreboard Specifications

Overall size: 20' (W) x 7' (H) x 6" (D)
Approximate Weight: 773 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 6th Inning Digit.


17" LED Digits for BALL, STRIKE, OUT, PITCH COUNT
14" LED Digits for INNINGS, RUNS
10" Electronic Team Names at 8 CH

6" White Vinyl Lettering for PITCH COUNT
9" White Vinyl Lettering for INNINGS, RUNS
12" White Vinyl Lettering for BALL, STRIKE, OUT

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/16/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES SCOREBOARDS	
DESCRIPTION		OES ELECTRONIC SCOREBOARDS M7120AxCE-PC	
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7120AUXE-PC	3/16/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE
		MLI	1 OF 1

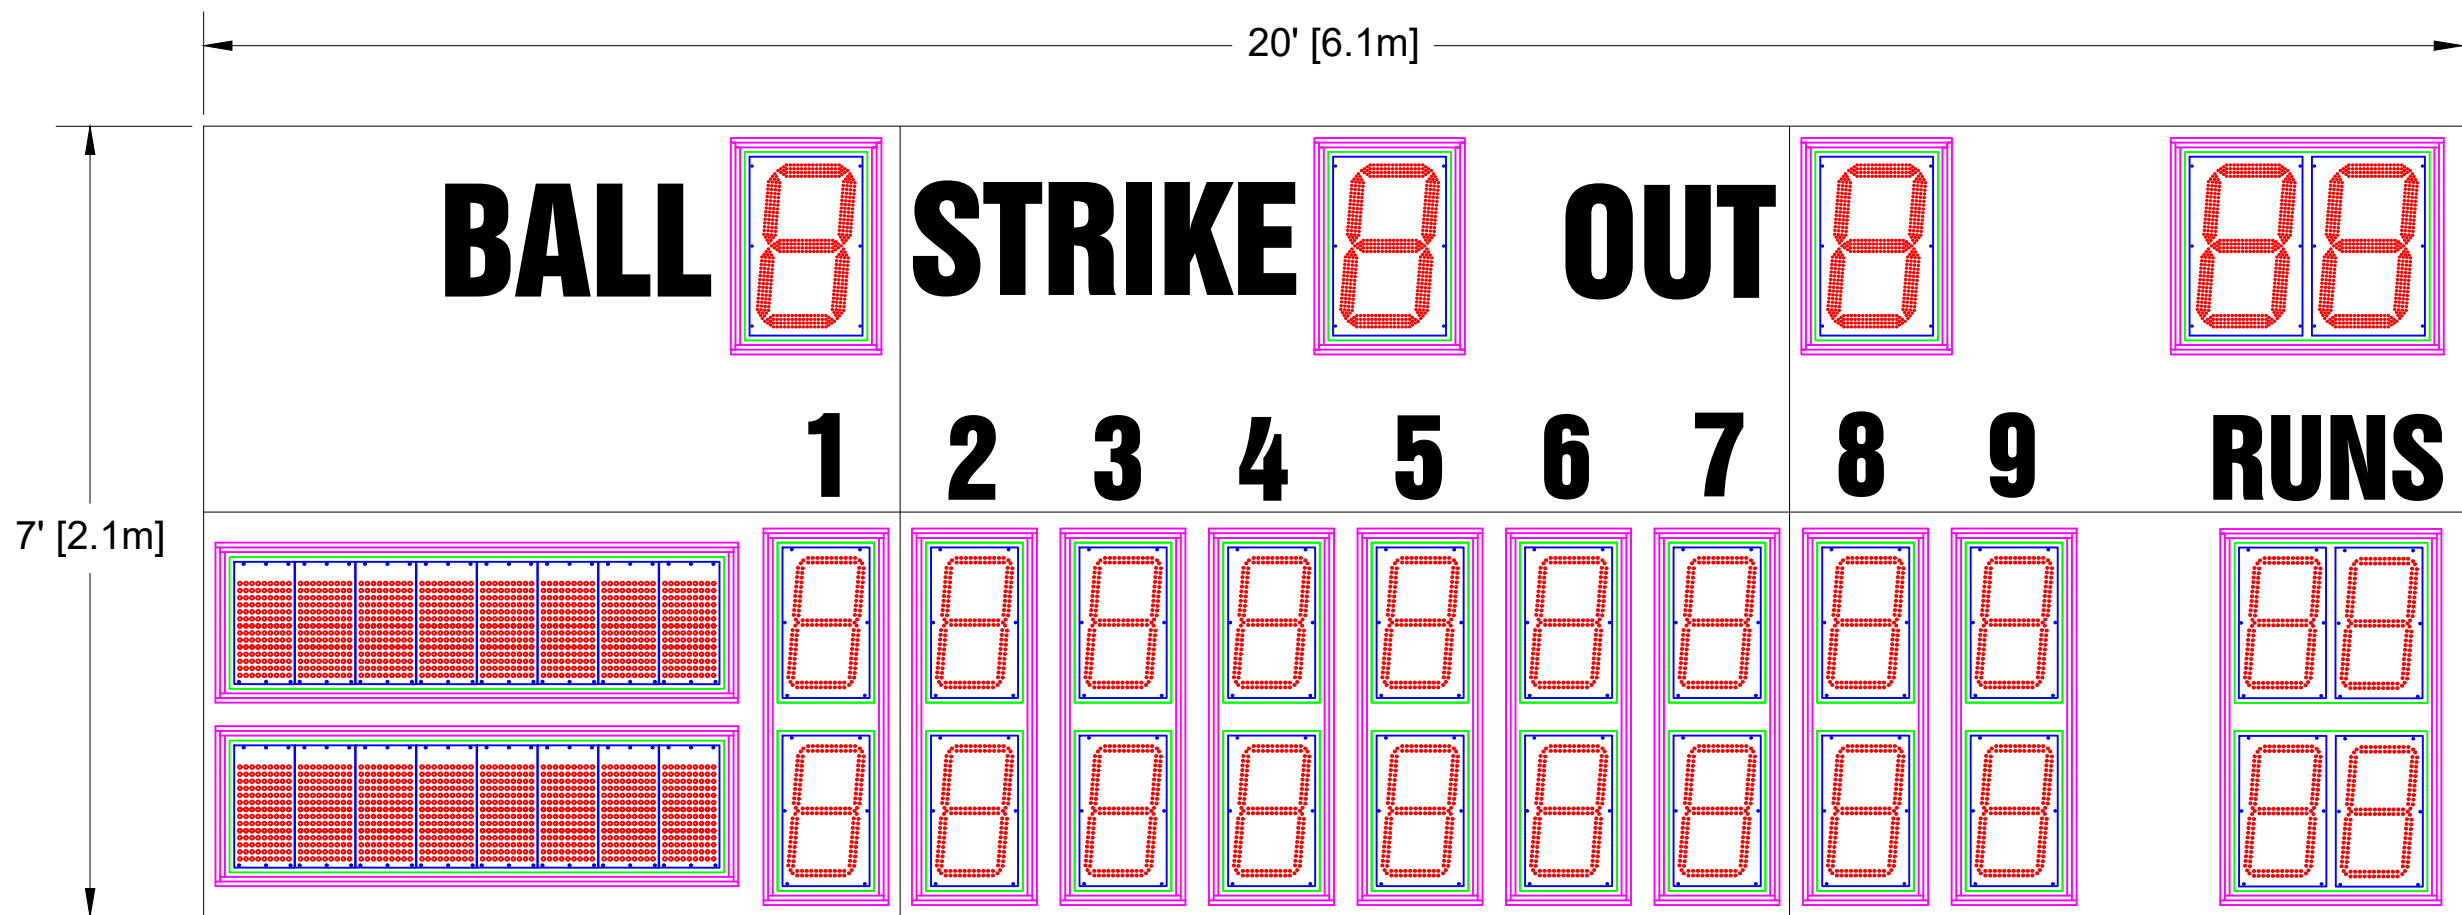

Scoreboard Specifications

Overall size: 20' (W) x 7' (H) x 6" (D)
Approximate Weight: 773 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 6th Inning Digit.


17" LED Digits for BALL, STRIKE, OUT, TIMER
14" LED Digits for INNINGS, RUNS
10" Electronic Tean Names at 8 CH

9" White Vinyl Lettering for INNINGS, RUNS
12" White Vinyl Lettering for BALL, STRIKE, OUT

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/25/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M7120AxCE-TM		SIZE B	REV A
FILENAME M7120AUXE-TM		INIT DRAWING DATE 3/25/21	USE FOR REVIEW
SCALE NTS		DRAWN BY MLI	PAGE 1 OF 1

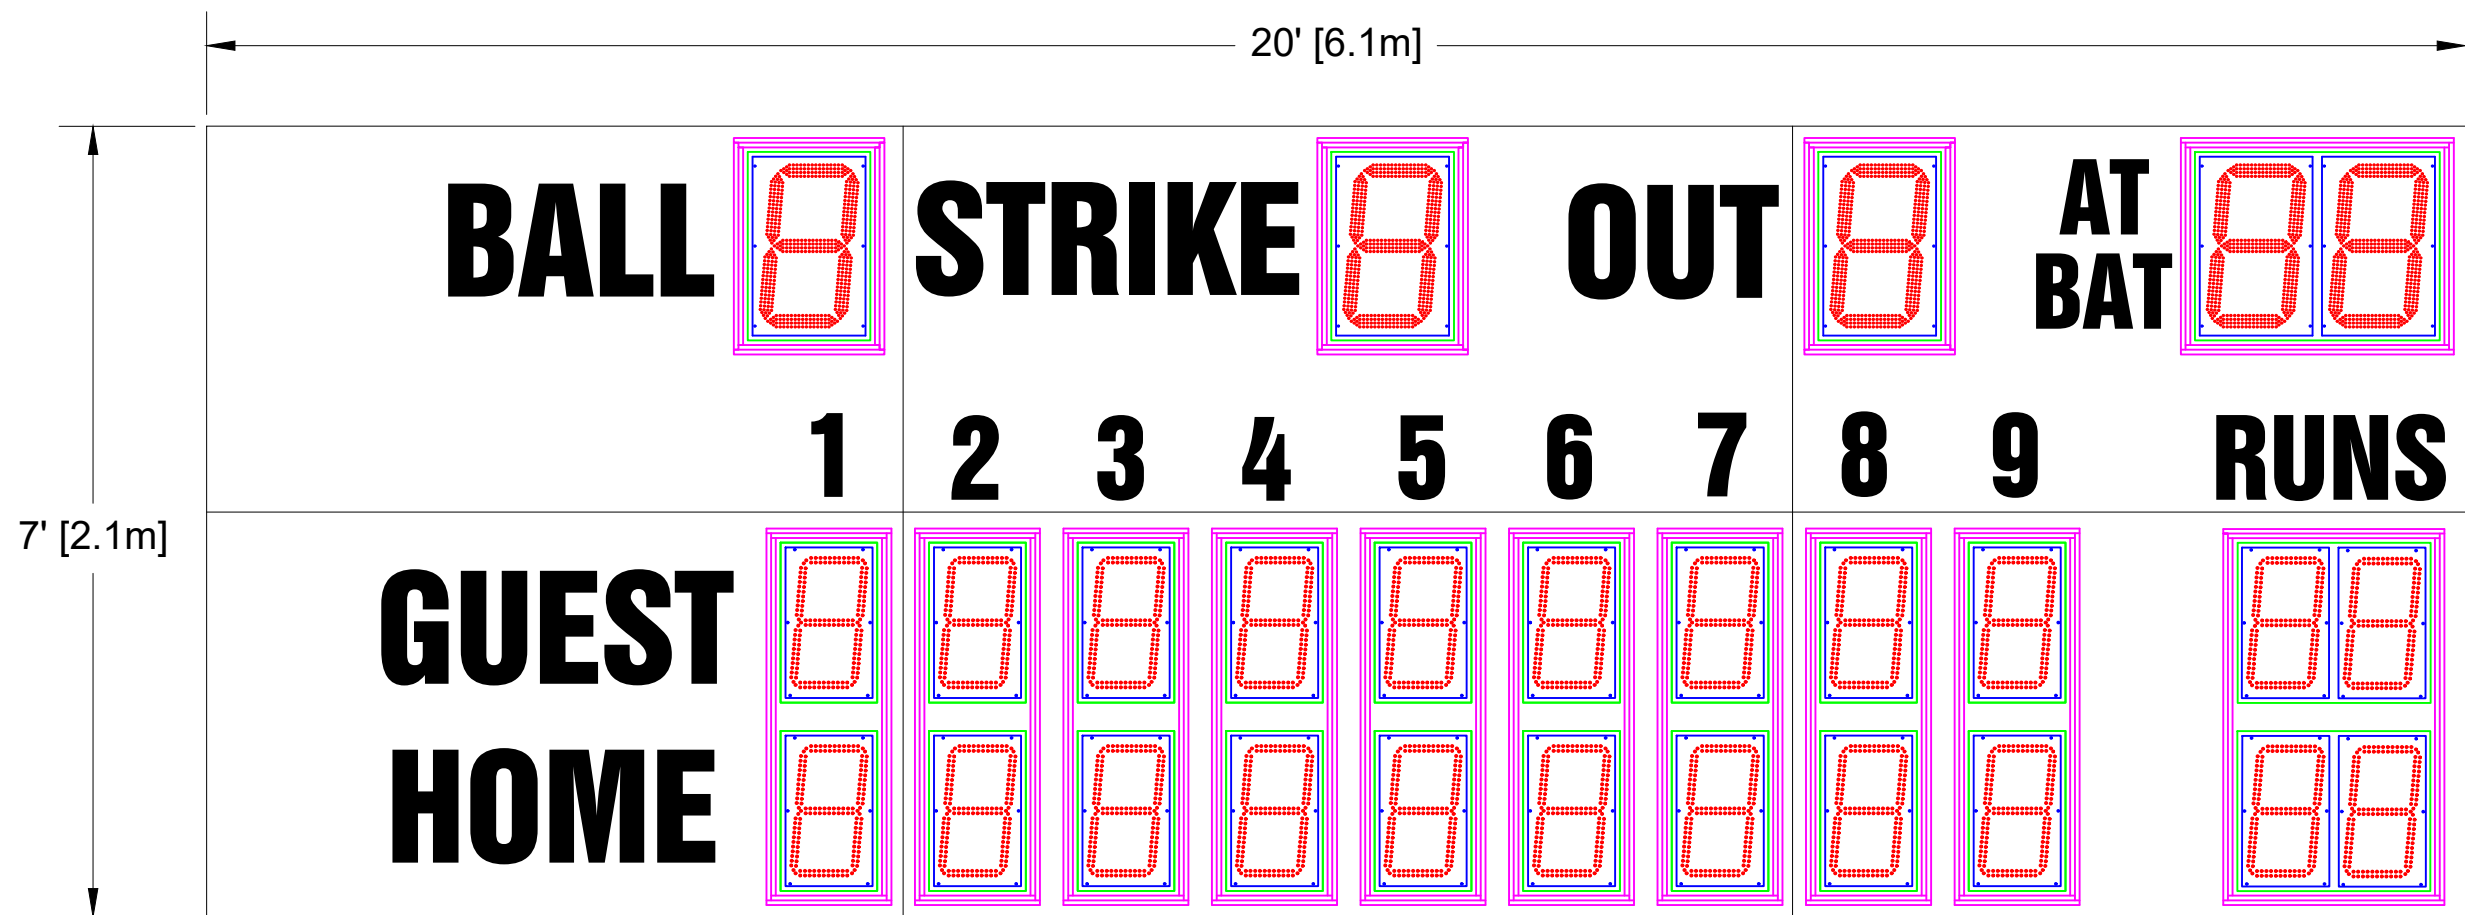

Scoreboard Specifications

Overall size: 20' (W) x 7' (H) x 6" (D)

Approximate Weight: 773 lbs

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 6th Inning Digit.

17" LED Digits for BALL, STRIKE, OUT, AT BAT

14" LED Digits for INNINGS, RUNS

8" White Vinyl Lettering for AT BAT

9" White Vinyl Lettering for INNINGS, RUNS


12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME

This Layout is for internal reference only.

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	1/18/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES SCOREBOARDS	
DESCRIPTION		OES ELECTRONIC SCOREBOARDS M7120AxCV-AB	
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7120AUXV-AB	1/18/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE
CGTHOMPSON		1 OF 1	

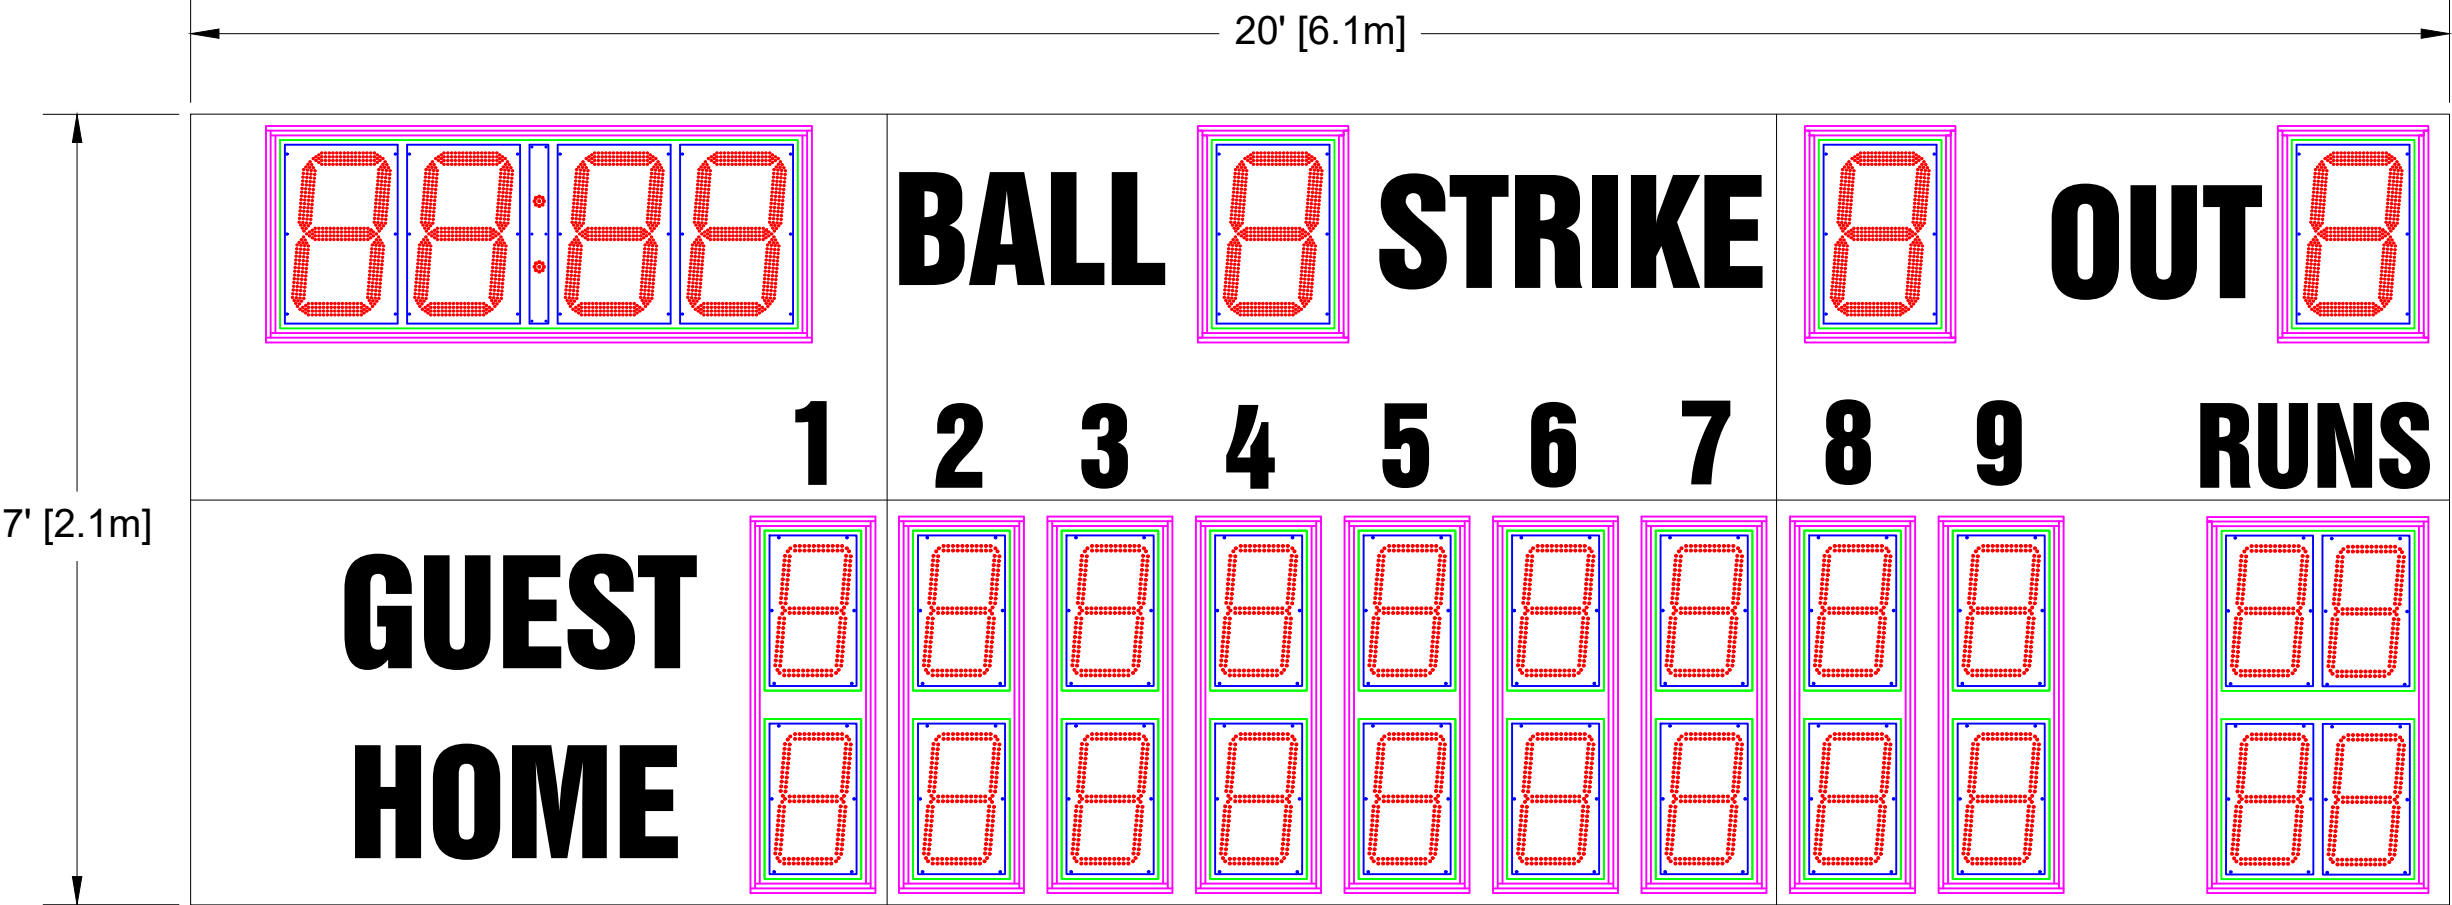

Scoreboard Specifications

Overall size: 20' (W) x 7' (H) x 6" (D)
Approximate Weight: 773 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 6th Inning Digit.

17" LED Digits for BALL, STRIKE, OUT, TIME
14" LED Digits for INNINGS, RUNS

9" White Vinyl Lettering for INNINGS, RUNS
12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/25/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M7120AxCV-CL		SIZE B	REV A
FILENAME M7120AUXV-CL		INIT DRAWING DATE 3/25/21	USE FOR REVIEW
SCALE NTS		DRAWN BY MLI	PAGE 1 OF 1

