

Scoreboard Specifications

Overall size: 21' (W) x 6' (H) x 6" (D)

Approximate Weight: 820 lbs

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the [8TH INNING] Digit(s).

14" LED Digits for AT BAT, BALL, STRIKE, OUT, LAST PLAY

10" LED Digits for INNINGS, RUNS, HITS, ERR

10" Electronic Team Names at 8 CH



10" White Vinyl Lettering for BALL, STRIKE, OUT,


7" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR, AT BAT

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	1/23/2021

				4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		DESCRIPTION OES ELECTRONIC SCOREBOARDS M7121AxCE-AB			
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 		SIZE FILENAME M7121AUXE-AB B USAGE	INIT DRAWING DATE 1/23/21 REV A
SCALE NTS		DRAWN BY CGTHOMPSON		PAGE 1 OF 1	

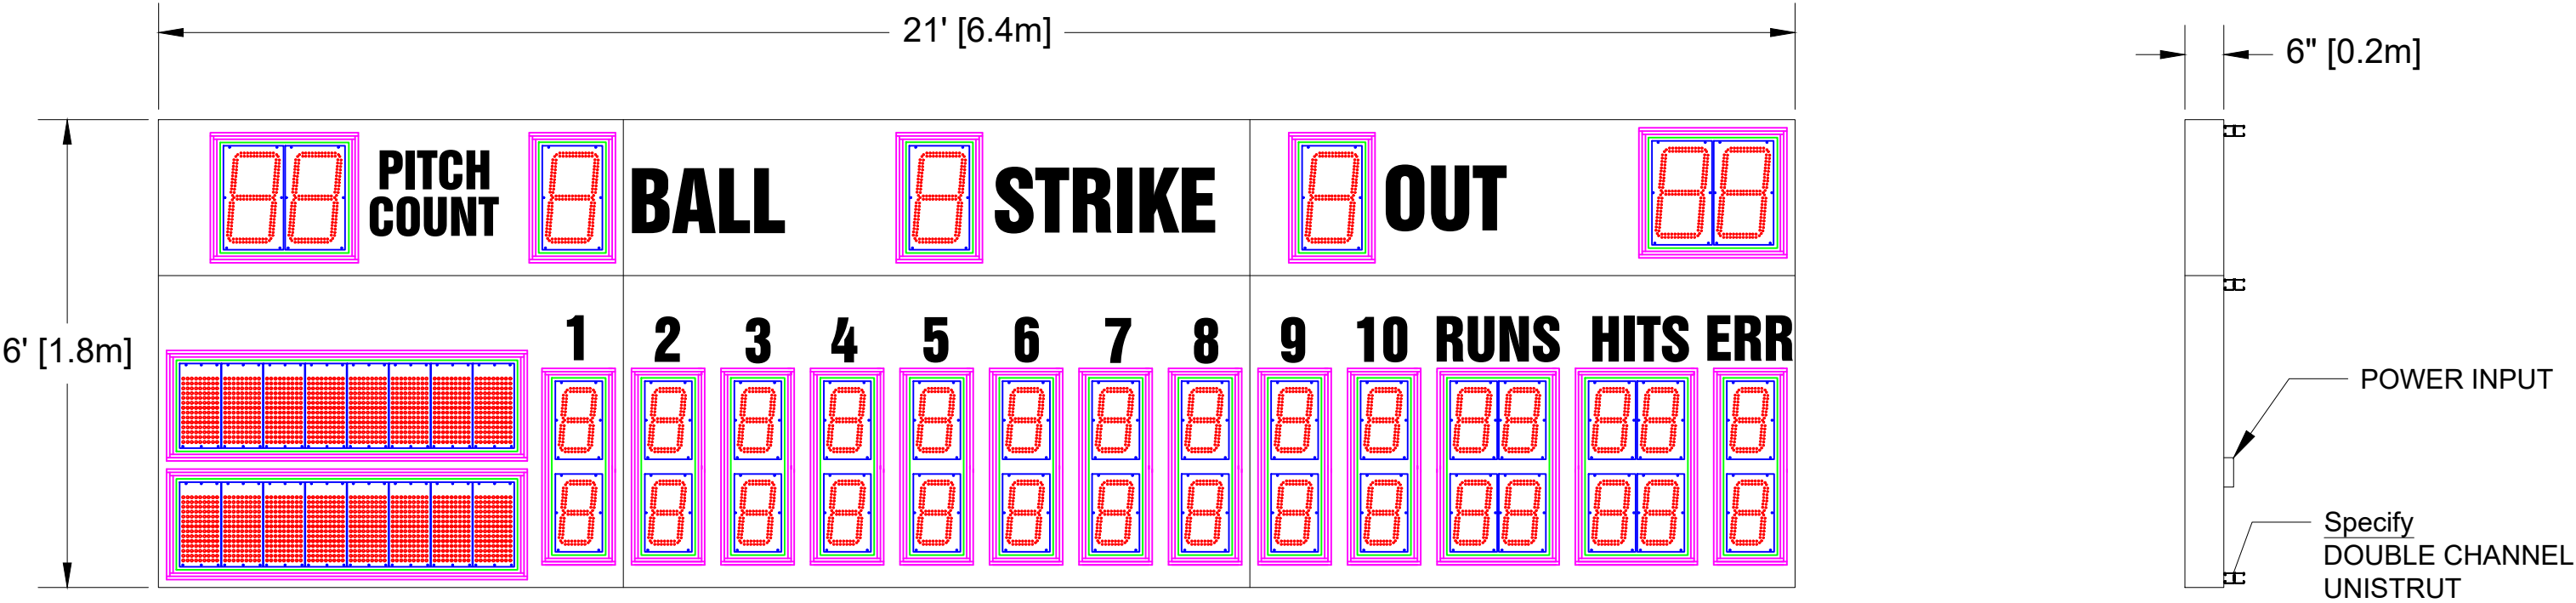

Scoreboard Specifications

Overall size: 21' (W) x 6' (H) x 6" (D)
Approximate Weight: 820 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the [8TH INNING] Digit(s).

14" LED Digits for PITCH COUNT, BALL, STRIKE, OUT, LAST PLAY
10" LED Digits for INNINGS, RUNS, HITS, ERR

10" Electronic Team Names at 8 CH

10" White Vinyl Lettering for BALL, STRIKE, OUT,
7" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR
6" White Vinyl Lettering for PITCH COUNT

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/16/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.


TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION OES ELECTRONIC SCOREBOARDS M7121AxCE-PC			
SIZE B	FILENAME M7121AUXE-PC	INIT DRAWING DATE 3/16/21	REV A
USAGE USE FOR REVIEW			
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	

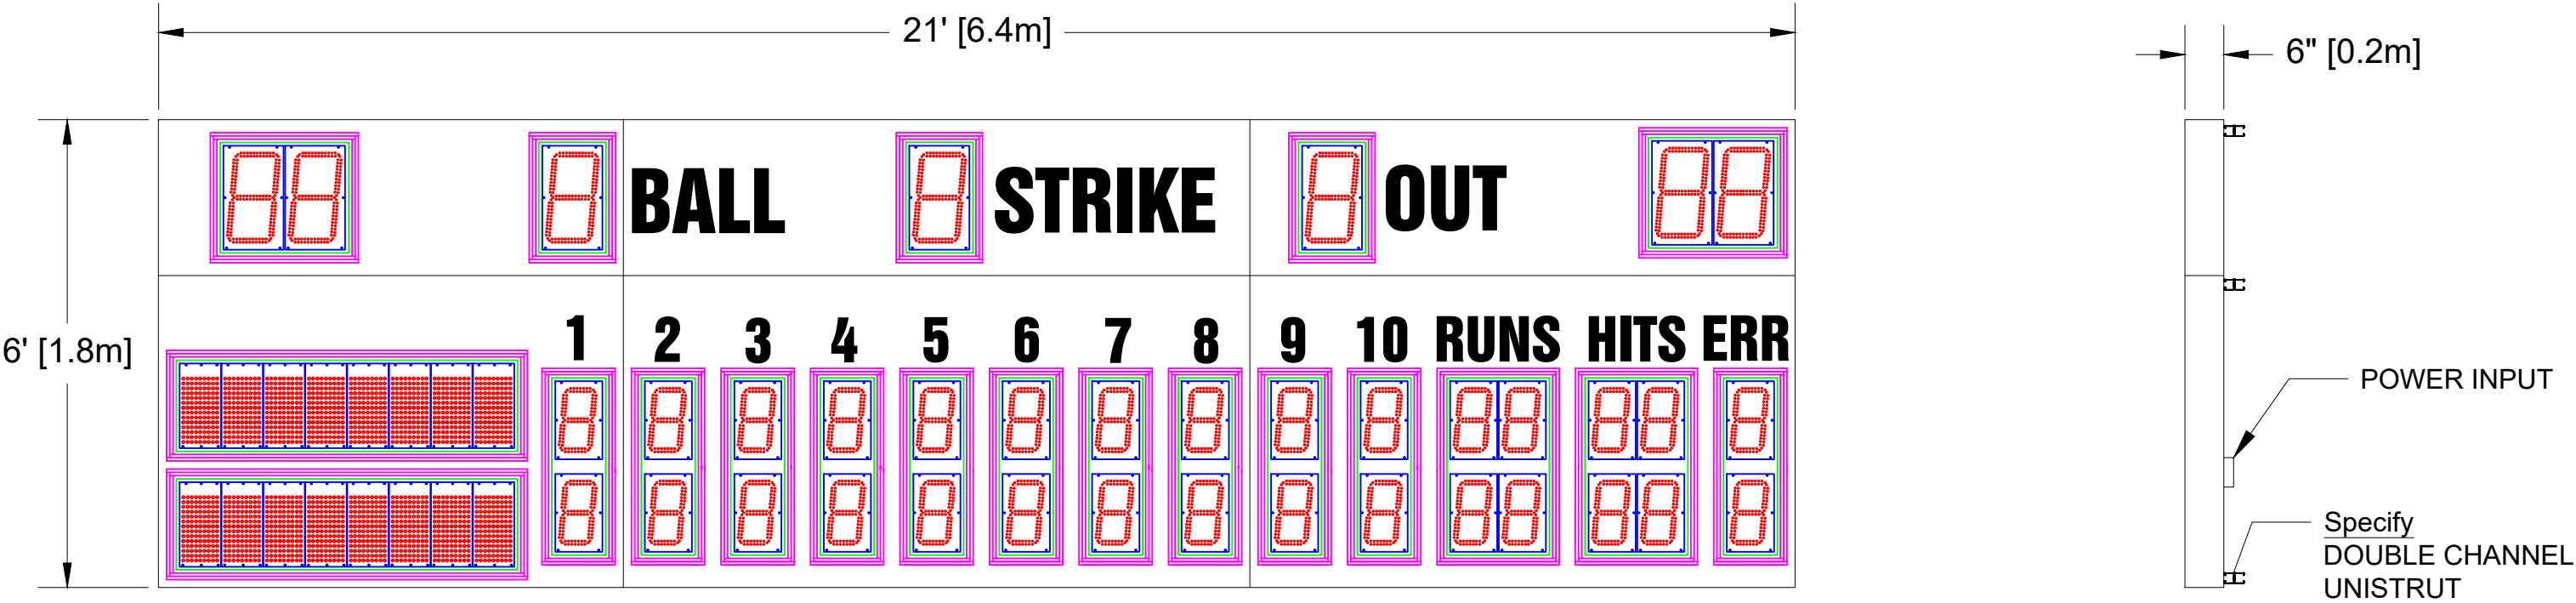

Scoreboard Specifications

Overall size: 21' (W) x 6' (H) x 6" (D)
Approximate Weight: 820 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the [8TH INNING] Digit(s).



14" LED Digits for TIMER, BALL, STRIKE, OUT, LAST PLAY
10" LED Digits for INNINGS, RUNS, HITS, ERR


10" Electronic Team Names at 8 CH

10" White Vinyl Lettering for BALL, STRIKE, OUT,
7" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/16/2021

		<div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>			
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		DESCRIPTION			
		OES ELECTRONIC SCOREBOARDS M7121AxCE-TM			
TOLERANCE INFORMATION Dimensions are in Inches		SIZE	FILENAME M7121AUXE-TM	INIT DRAWING DATE 3/16/21	REV
<div>Fractional $\pm 1/16"$ Two Place Decimals $\pm 0.02"$ Three Place Decimals $\pm 0.005"$ Four Place Decimals $\pm 0.0005"$ Angular $\pm 30'$</div>		B	USAGE		
			USE FOR REVIEW		
<div></div>		SCALE		NTS	DRAWN BY CGTHOMPSON
				PAGE	1 OF 1

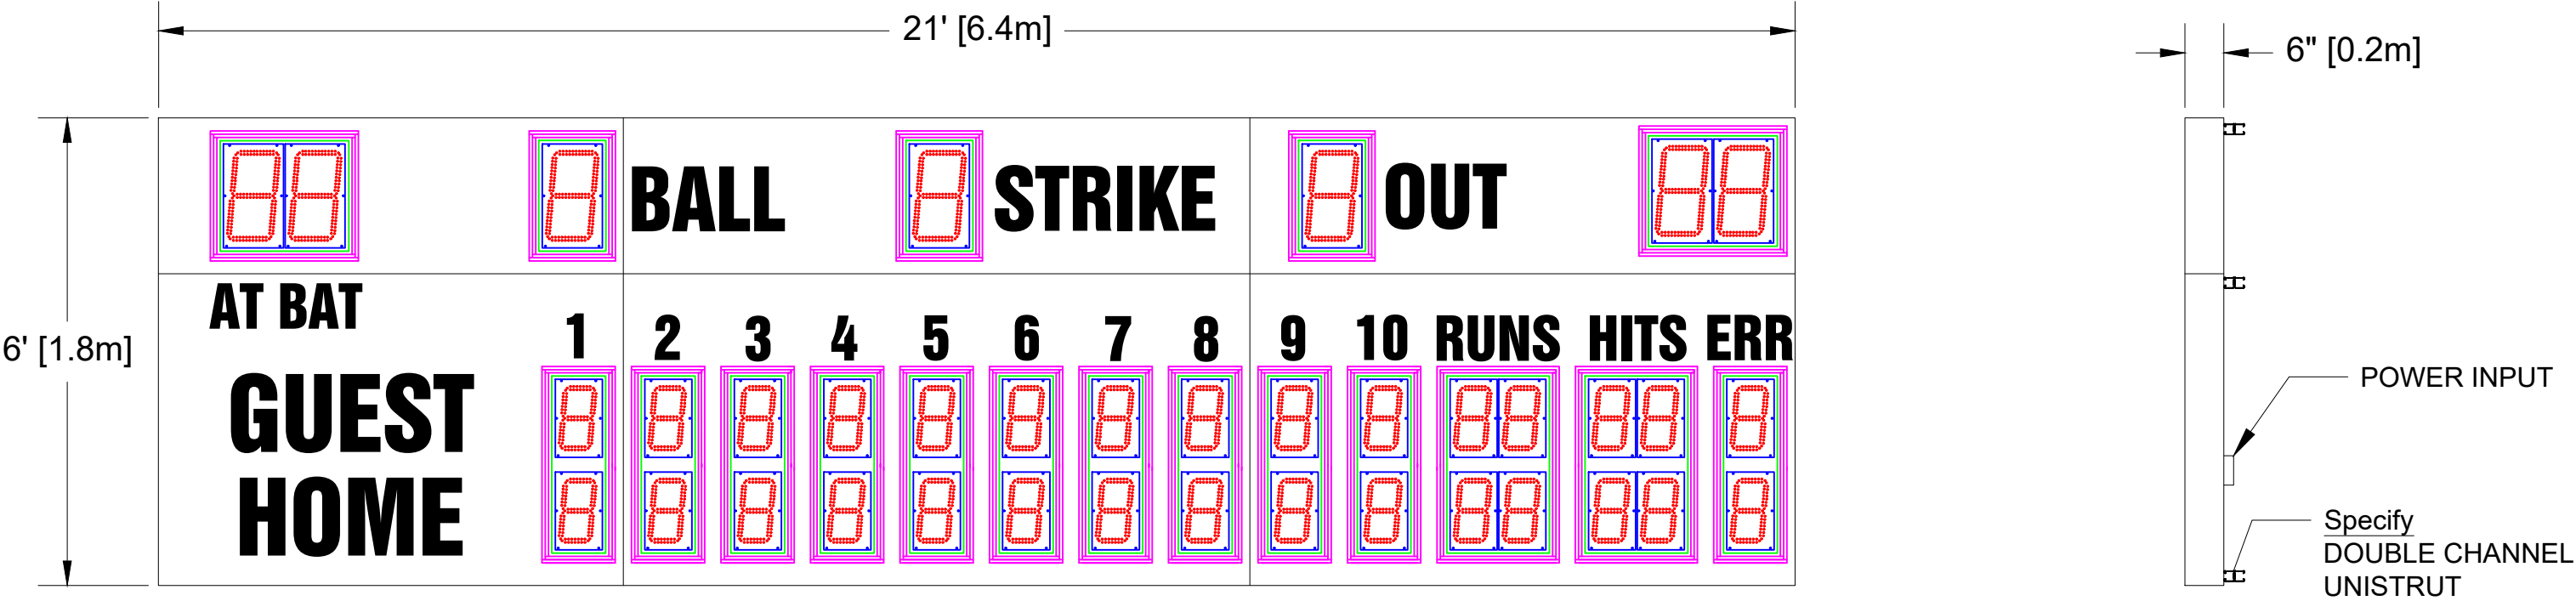

Scoreboard Specifications

Overall size: 21' (W) x 6' (H) x 6" (D)
Approximate Weight: 820 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the 8TH INNING Digit.

14" LED Digits for AT BAT, BALL, STRIKE, OUT, LAST PLAY
10" LED Digits for INNINGS, RUNS, HITS, ERR

12" White Vinyl Lettering for HOME GUEST
10" White Vinyl Lettering for BALL, STRIKE, OUT,
7" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR, AT BAT

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/25/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.


TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M7121AxCV-AB			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7121AUXV-AB	3/25/21	A
	USAGE		
SCALE		DRAWN BY	
NTS		CGTHOMPSON	
PAGE		1 OF 1	

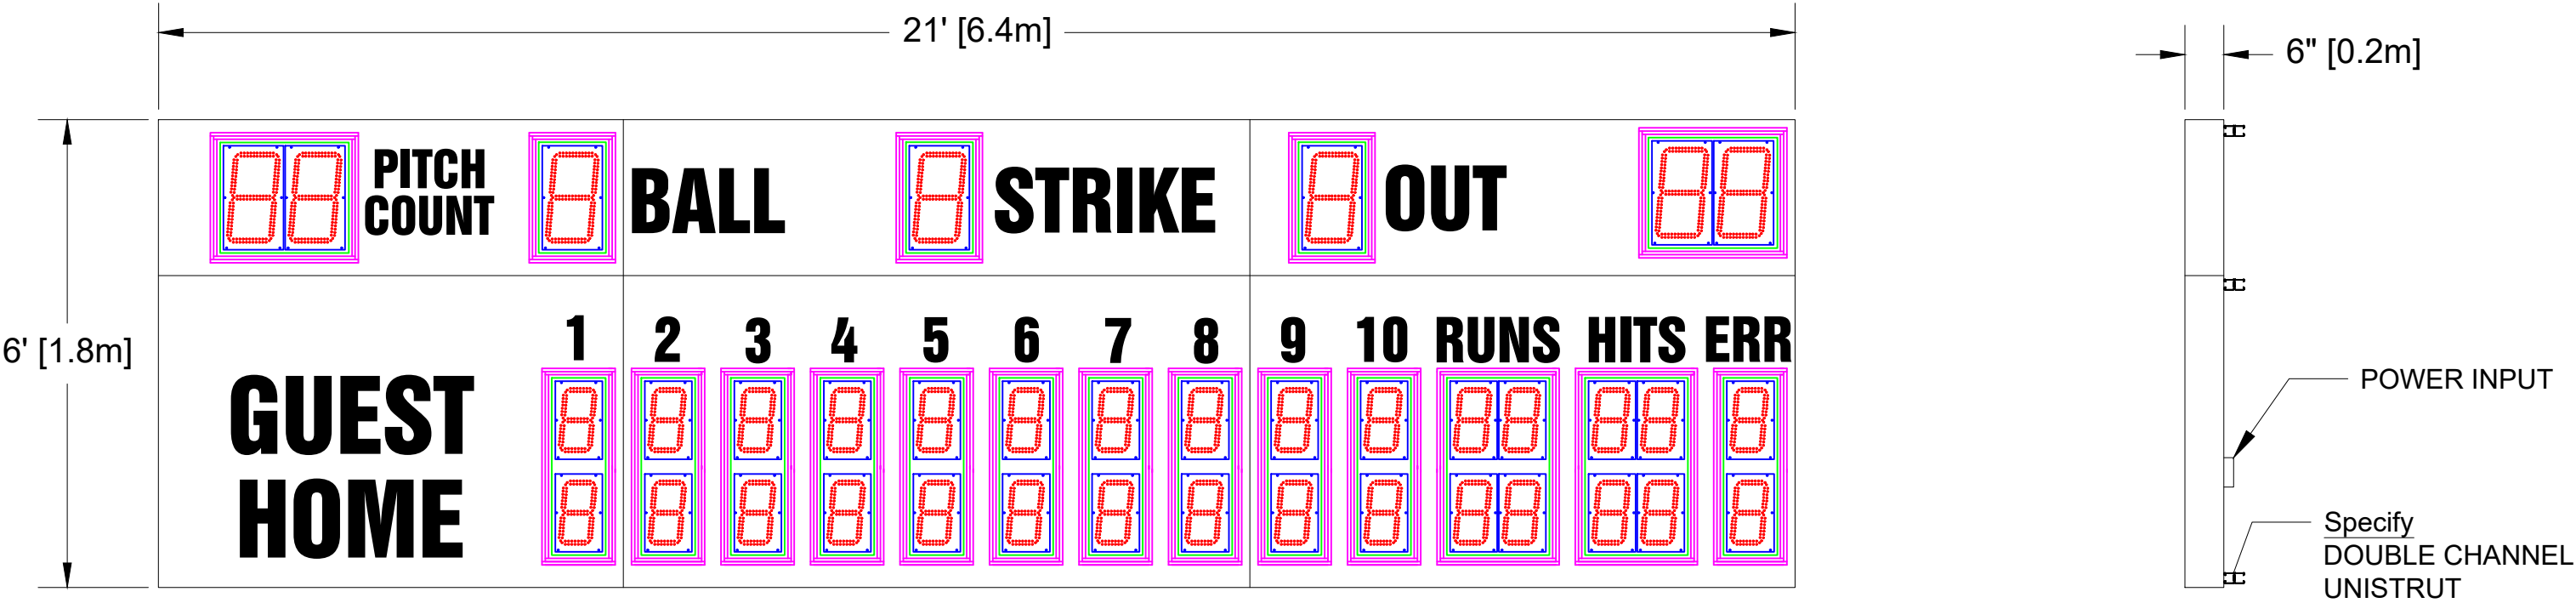

Scoreboard Specifications

Overall size: 21' (W) x 6' (H) x 6" (D)
Approximate Weight: 820 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the 8TH INNING Digit.

14" LED Digits for PITCH COUNT, BALL, STRIKE, OUT, LAST PLAY
10" LED Digits for INNINGS, RUNS, HITS, ERR

12" White Vinyl Lettering for HOME GUEST
10" White Vinyl Lettering for BALL, STRIKE, OUT,
7" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR
6" White Vinyl Lettering for PITCH COUNT

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/16/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS


4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION

OES ELECTRONIC SCOREBOARDS
M7121AxCV-PC

SIZE	FILENAME M7121AUXV-PC	INIT DRAWING DATE 3/16/21	REV A
B	USAGE USE FOR REVIEW		

SCALE	NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1
-------	-----	------------------------	-------------

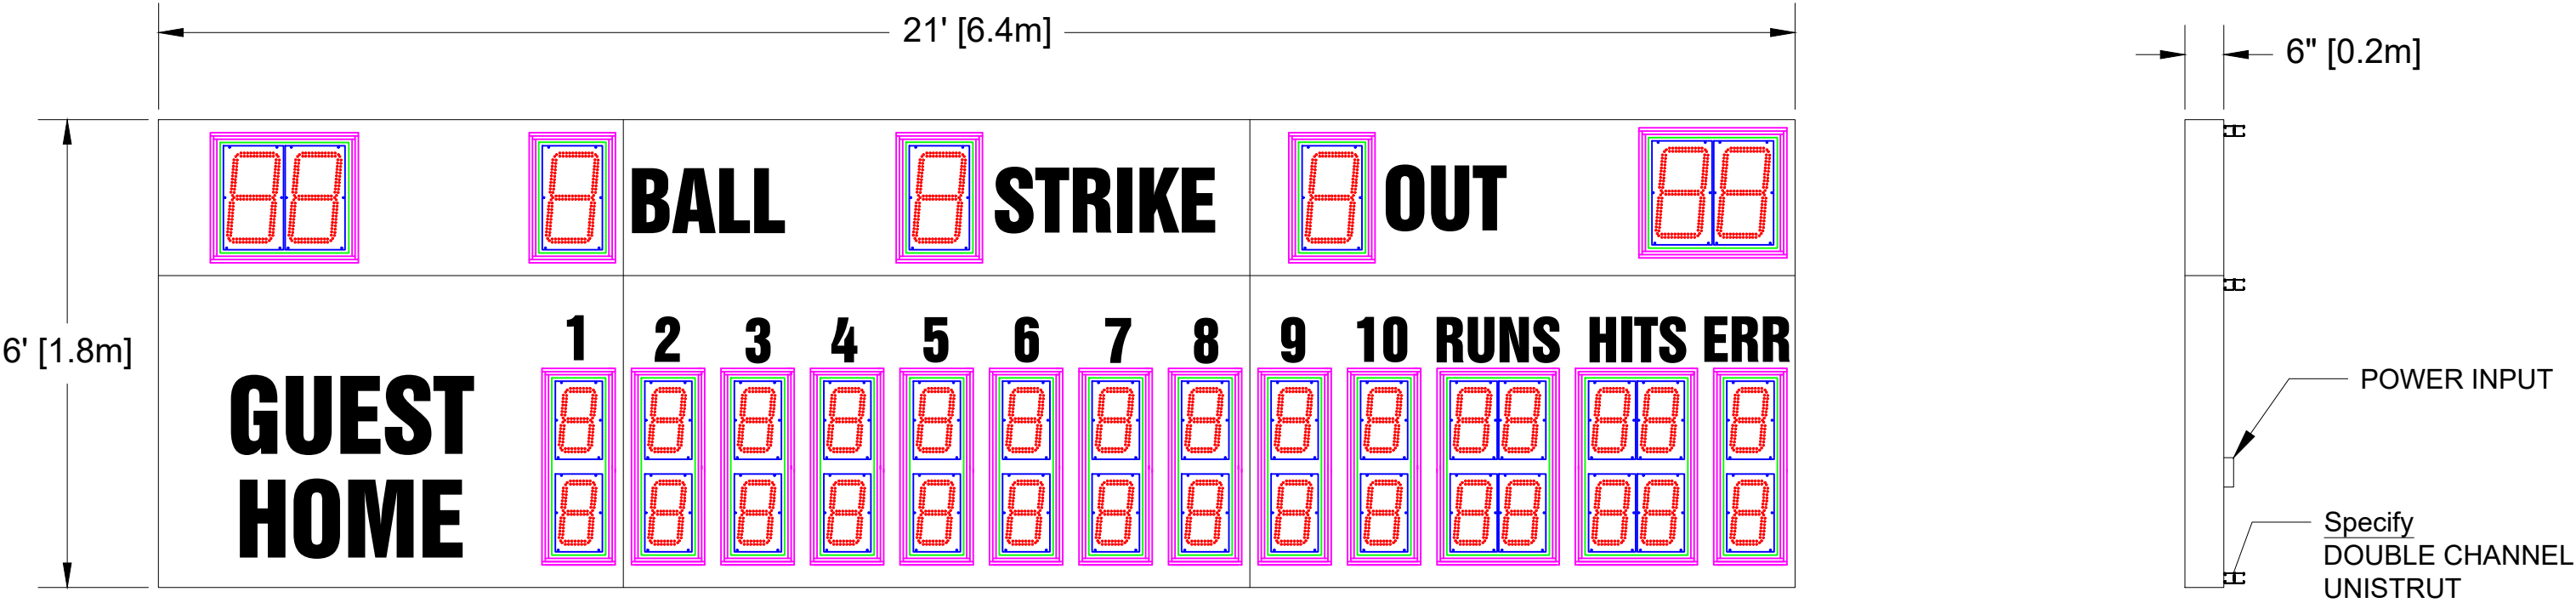

Scoreboard Specifications

Overall size: 21' (W) x 6' (H) x 6" (D)
Approximate Weight: 820 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the 8TH INNING Digit.

14" LED Digits for TIMER, BALL, STRIKE, OUT, LAST PLAY
10" LED Digits for INNINGS, RUNS, HITS, ERR

12" White Vinyl Lettering for HOME GUEST
10" White Vinyl Lettering for BALL, STRIKE, OUT,
7" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/16/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M7121AxCV-TM			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7121AUXV-TM	3/16/21	A
	USAGE		
SCALE		NTS	
DRAWN BY		CGTHOMPSON	
PAGE		1 OF 1	