

Scoreboard Specifications

Overall size: 21' (W) x 7' (H) x 6" (D)  
Approximate Weight: 957 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the RUNS Digit.

- 17" LED Digits for BALL, STRIKE, OUT, AT BAT
- 14" LED Digits for INNINGS, RUNS, HITS, ERR
- 10" Electronic Tean Names at 8 CH
- 12" White Vinyl Lettering for BALL, STRIKE, OUT
- 9" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR, AT BAT

This Layout is for internal reference only.  
All LED digits include the following:

- \* Shatter Resistant Lexan cover
- \* Conformal coating to protect from environmental conditions
- \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/16/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION  
Dimensions are in Inches


Fractional ± 1/16"  
Two Place Decimals ± 0.02"  
Three Place Decimals ± 0.005"  
Four Place Decimals ± 0.0005"  
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,  
London, ON, N6L 1P7  
Tel: (519) 652-5833  
Fax: (519) 652-3795  
Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M7121BxCE-AB			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7121BUXE-AB	3/16/21	A
	USAGE		
USE FOR REVIEW			

SCALE	NTS	DRAWN BY	CGTHOMPSON	PAGE	1 OF 1
-------	-----	----------	------------	------	--------

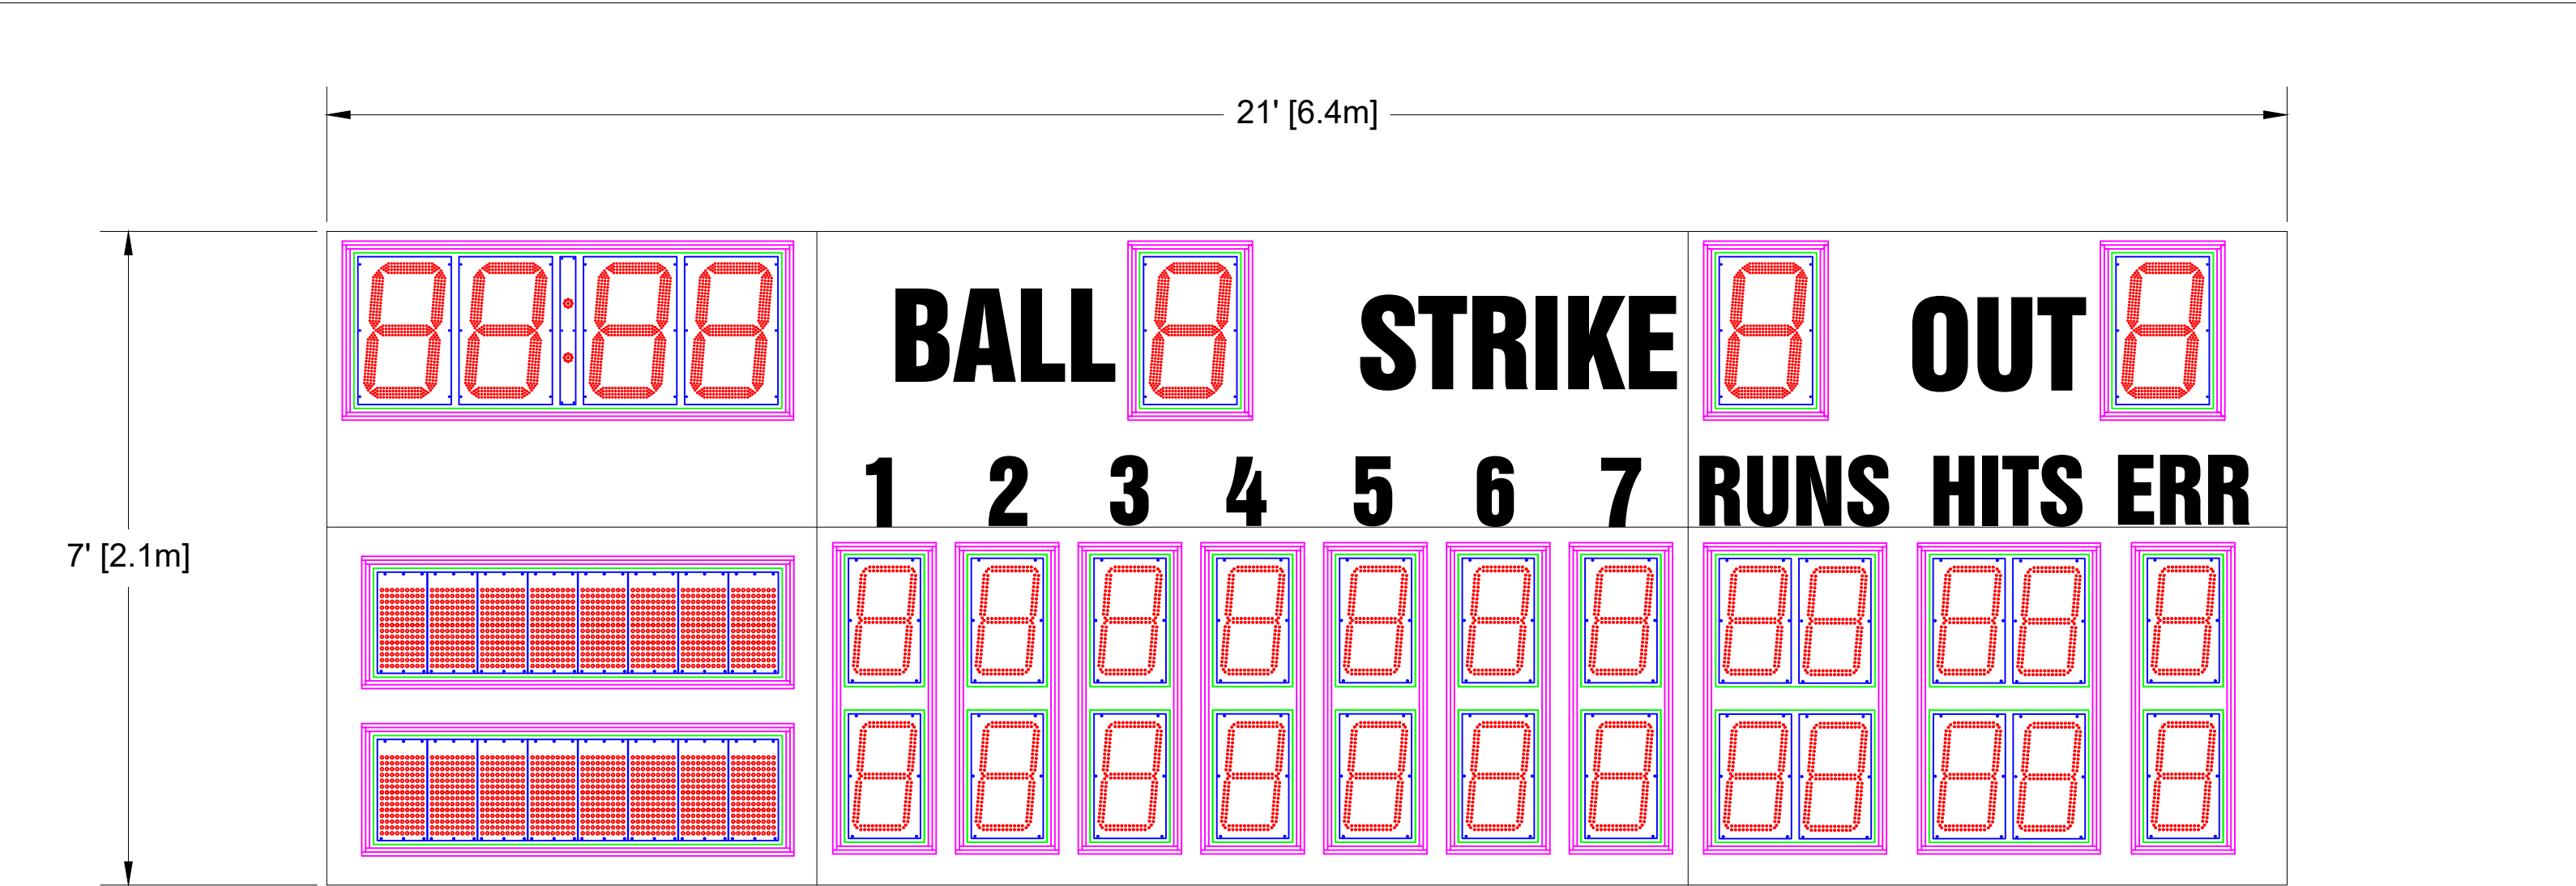

**Scoreboard Specifications**


Overall size: 21' (W) x 7' (H) x 6" (D)  
Approximate Weight: 957 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the RUNS Digit.

17" LED Digits for BALL. STRIKE, OUT, TIME  
14" LED Digits for INNINGS, RUNS, HITS, ERR  
10" Electronic Team Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT  
9" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR		DATE	
A		INITIAL DESIGN		OES		3/26/2021	
<p><u>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</u></p> <p>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</p> <p><u>TOLERANCE INFORMATION</u> Dimensions are in Inches</p> <p>Fractional <math>\pm 1/16"</math> Two Place Decimals <math>\pm 0.02"</math> Three Place Decimals <math>\pm 0.005"</math> Four Place Decimals <math>\pm 0.0005"</math> Angular <math>\pm 30'</math></p>		<p></p> <p>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</p>					
		DESCRIPTION		OES ELECTRONIC SCOREBOARDS M7121BxCE-CL			
		SIZE		FILENAME M7121BUXE-CL		INIT DRAWING DATE 3/26/21	
		B		USAGE		REV A	
				USE FOR REVIEW			
		SCALE		NTS		DRAWN BY MLI	
						PAGE 1 OF 1	

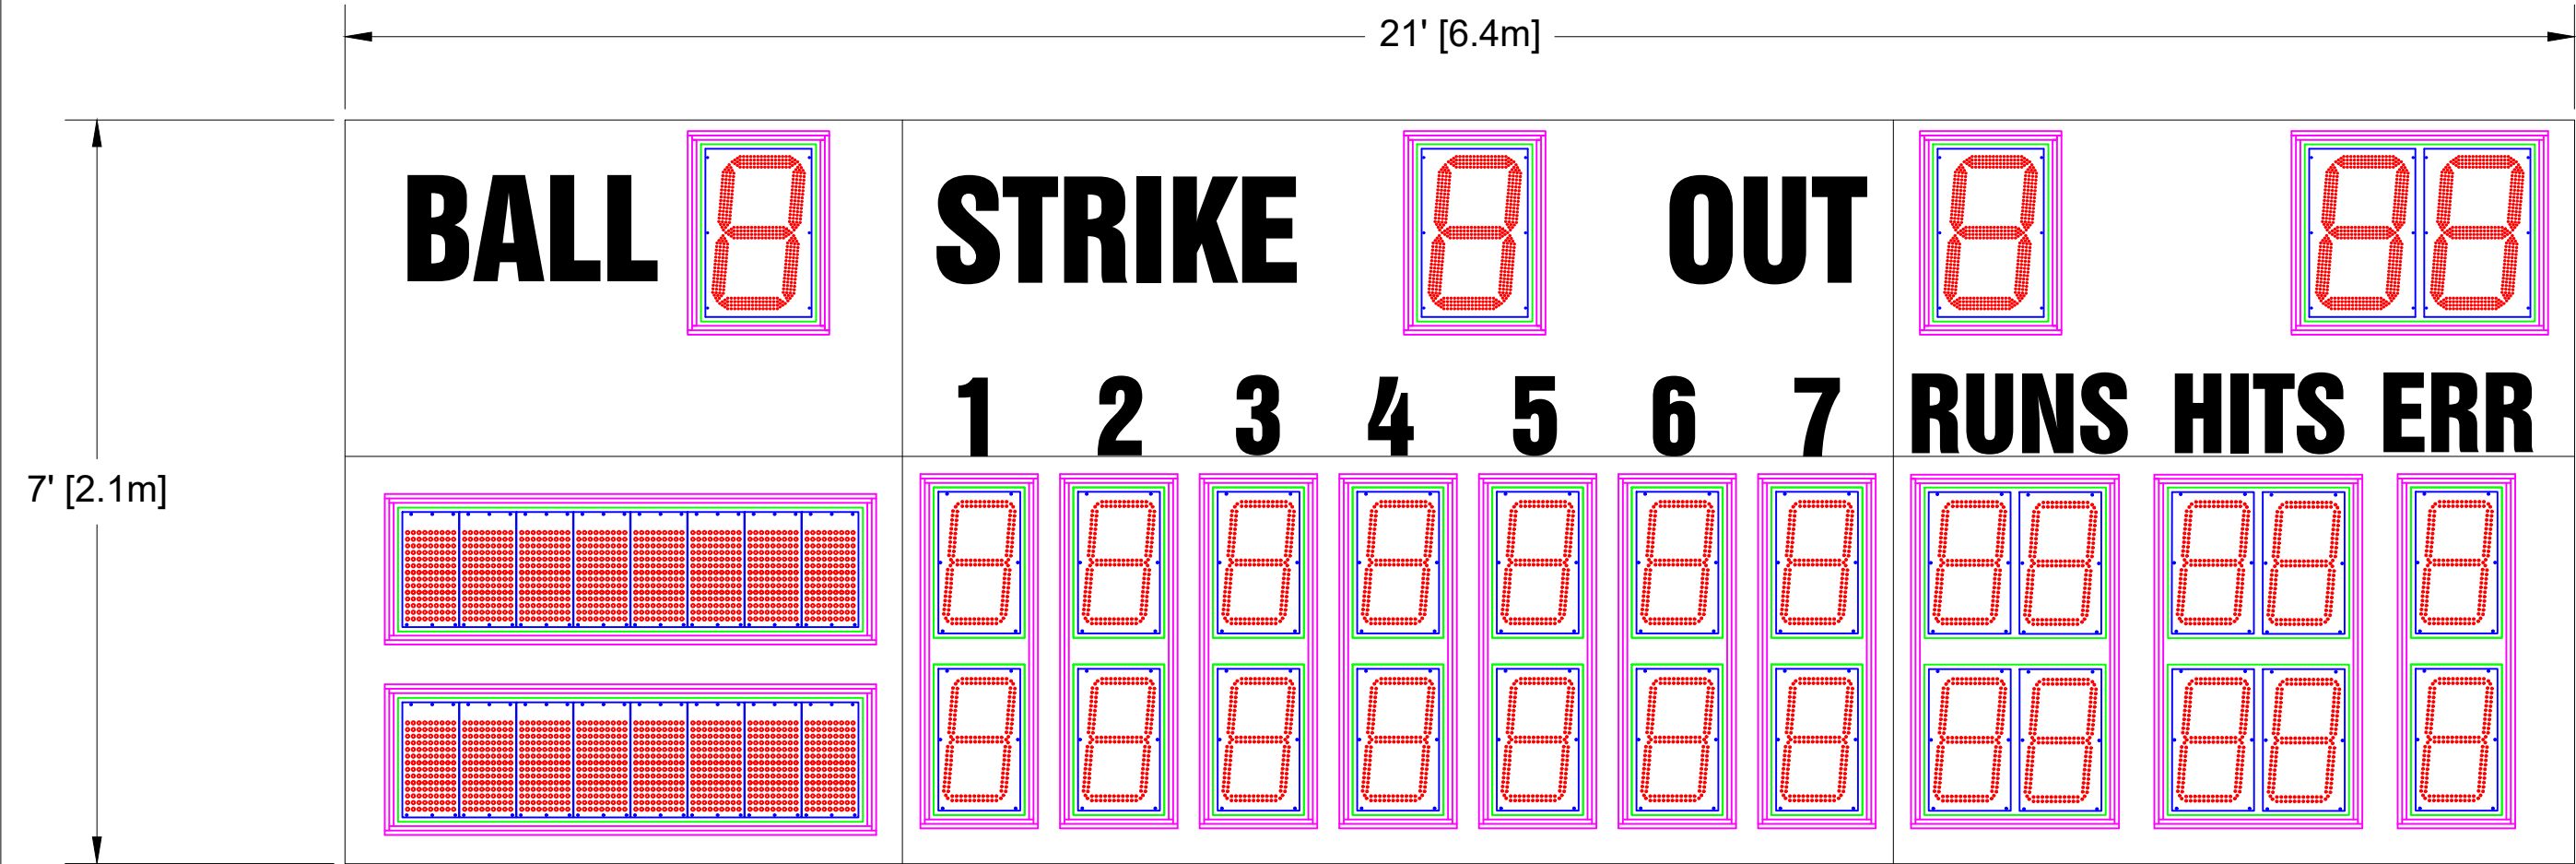

Scoreboard Specifications

Overall size: 21' (W) x 7' (H) x 6" (D)  
Approximate Weight: 957 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the RUNS Digit.

17" LED Digits for BALL, STRIKE, OUT, LAST PLAY  
14" LED Digits for INNINGS, RUNS, HITS, ERR  
10" Electronic Tean Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT  
9" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR

This Layout is for internal reference only.  
All LED digits include the following:

- \* Shatter Resistant Lexan cover
- \* Conformal coating to protect from environmental conditions
- \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	12/23/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION  
Dimensions are in Inches


Fractional ± 1/16"  
Two Place Decimals ± 0.02"  
Three Place Decimals ± 0.005"  
Four Place Decimals ± 0.0005"  
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,  
London, ON, N6L 1P7  
Tel: (519) 652-5833  
Fax: (519) 652-3795  
Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M7121BxCE-LP			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7121BUXE-LP	12/23/21	A
	USAGE		
USE FOR REVIEW			

SCALE	NTS	DRAWN BY	MLI	PAGE	1 OF 1
-------	-----	----------	-----	------	--------

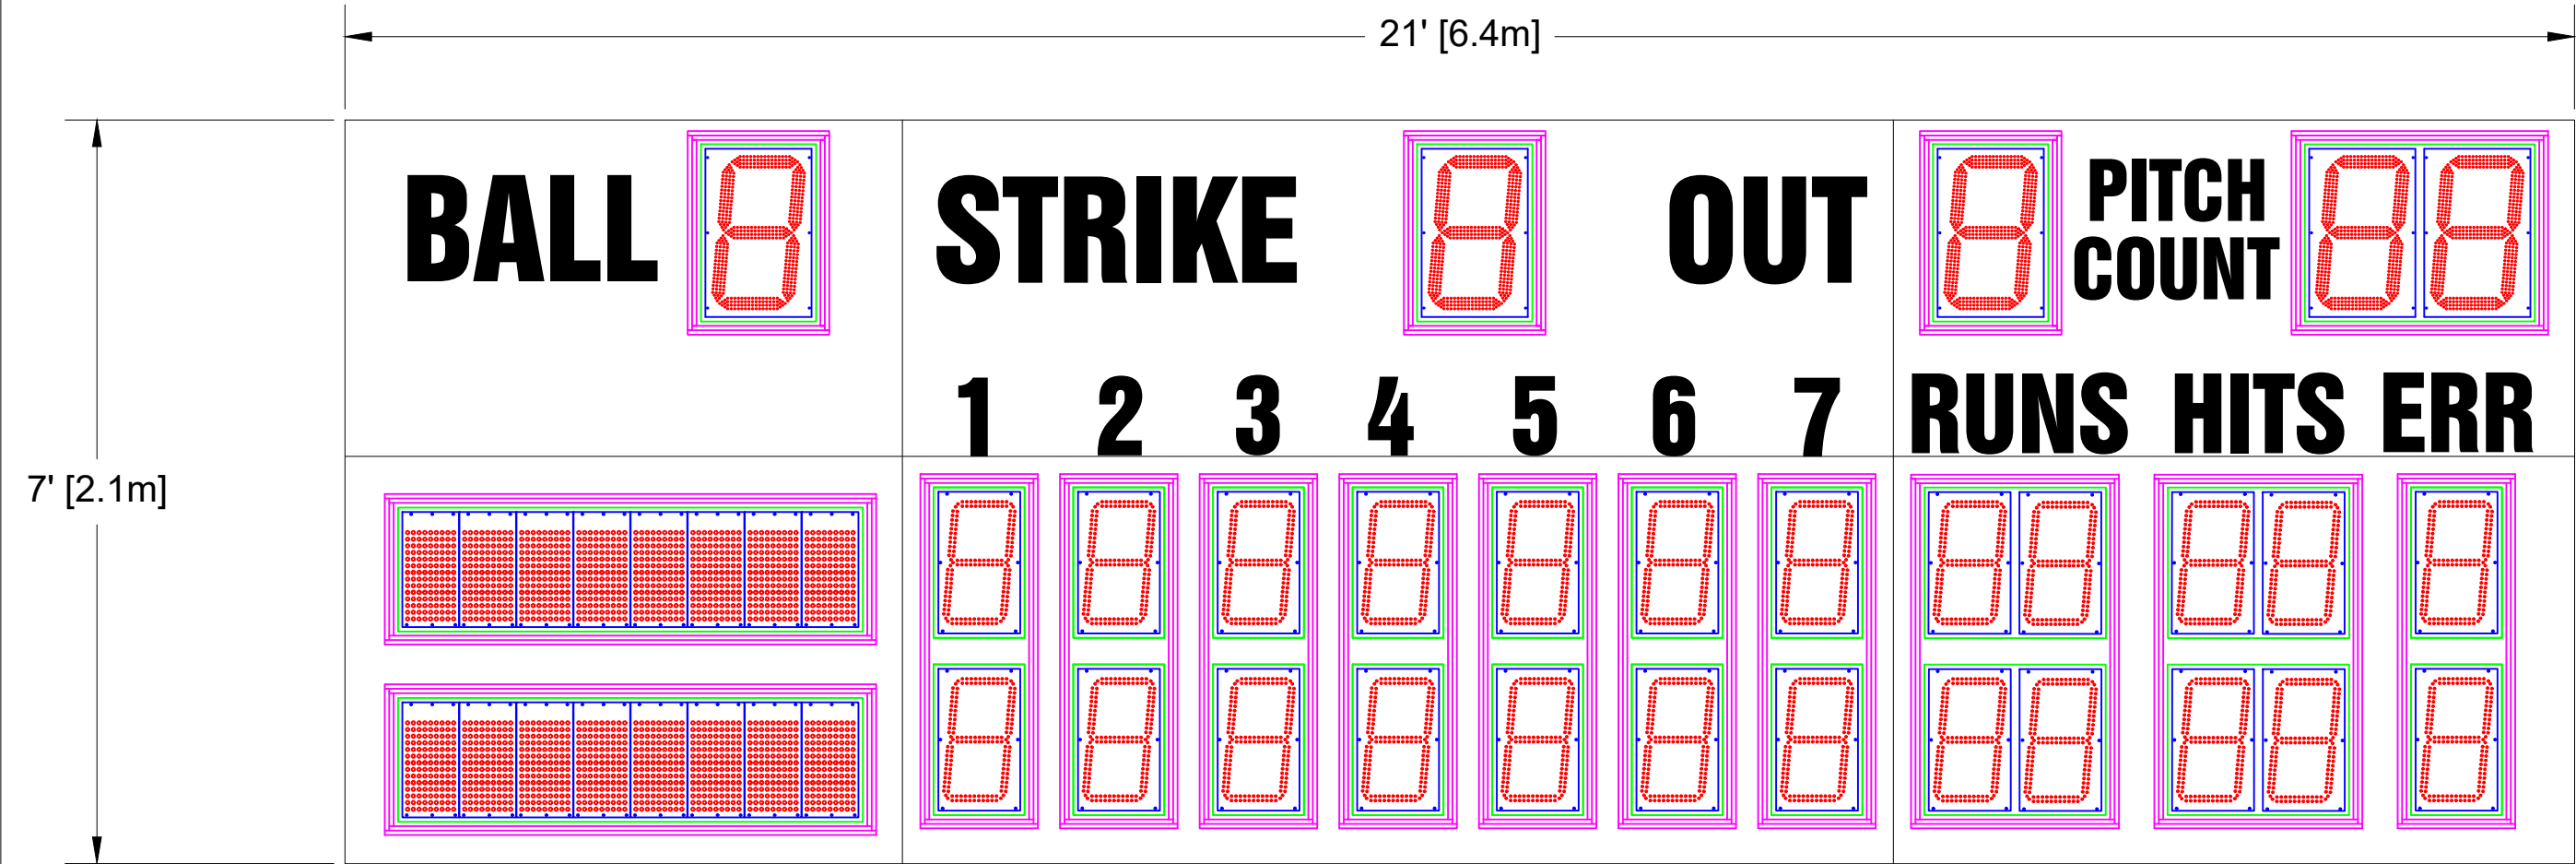

### Scoreboard Specifications

Overall size: 21' (W) x 7' (H) x 6" (D)

Approximate Weight: 957 lbs

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the RUNS Digit.

17" LED Digits for BALL, STRIKE, OUT, PITCH COUNT

14" LED Digits for INNINGS, RUNS, HITS, ERR

10" Electronic Tean Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT

9" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR



7" White Vinyl Lettering for PITCH COUNT


This Layout is for internal reference only.

All LED digits include the following:

- \* Shatter Resistant Lexan cover
- \* Conformal coating to protect from environmental conditions
- \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/26/2021

				4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		DESCRIPTION			
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		OES ELECTRONIC SCOREBOARDS M7121BxCE-PC			
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS		SIZE	INIT DRAWING DATE
<p>Fractional ± 1/16"</p> <p>Two Place Decimals ± 0.02"</p> <p>Three Place Decimals ± 0.005"</p> <p>Four Place Decimals ± 0.0005"</p> <p>Angular ± 30°</p> 		B		FILENAME M7121BUXE-PC	3/26/21
				USAGE	
				USE FOR REVIEW	
		SCALE	NTS	DRAWN BY	PAGE 1 OF 1
				MLI	

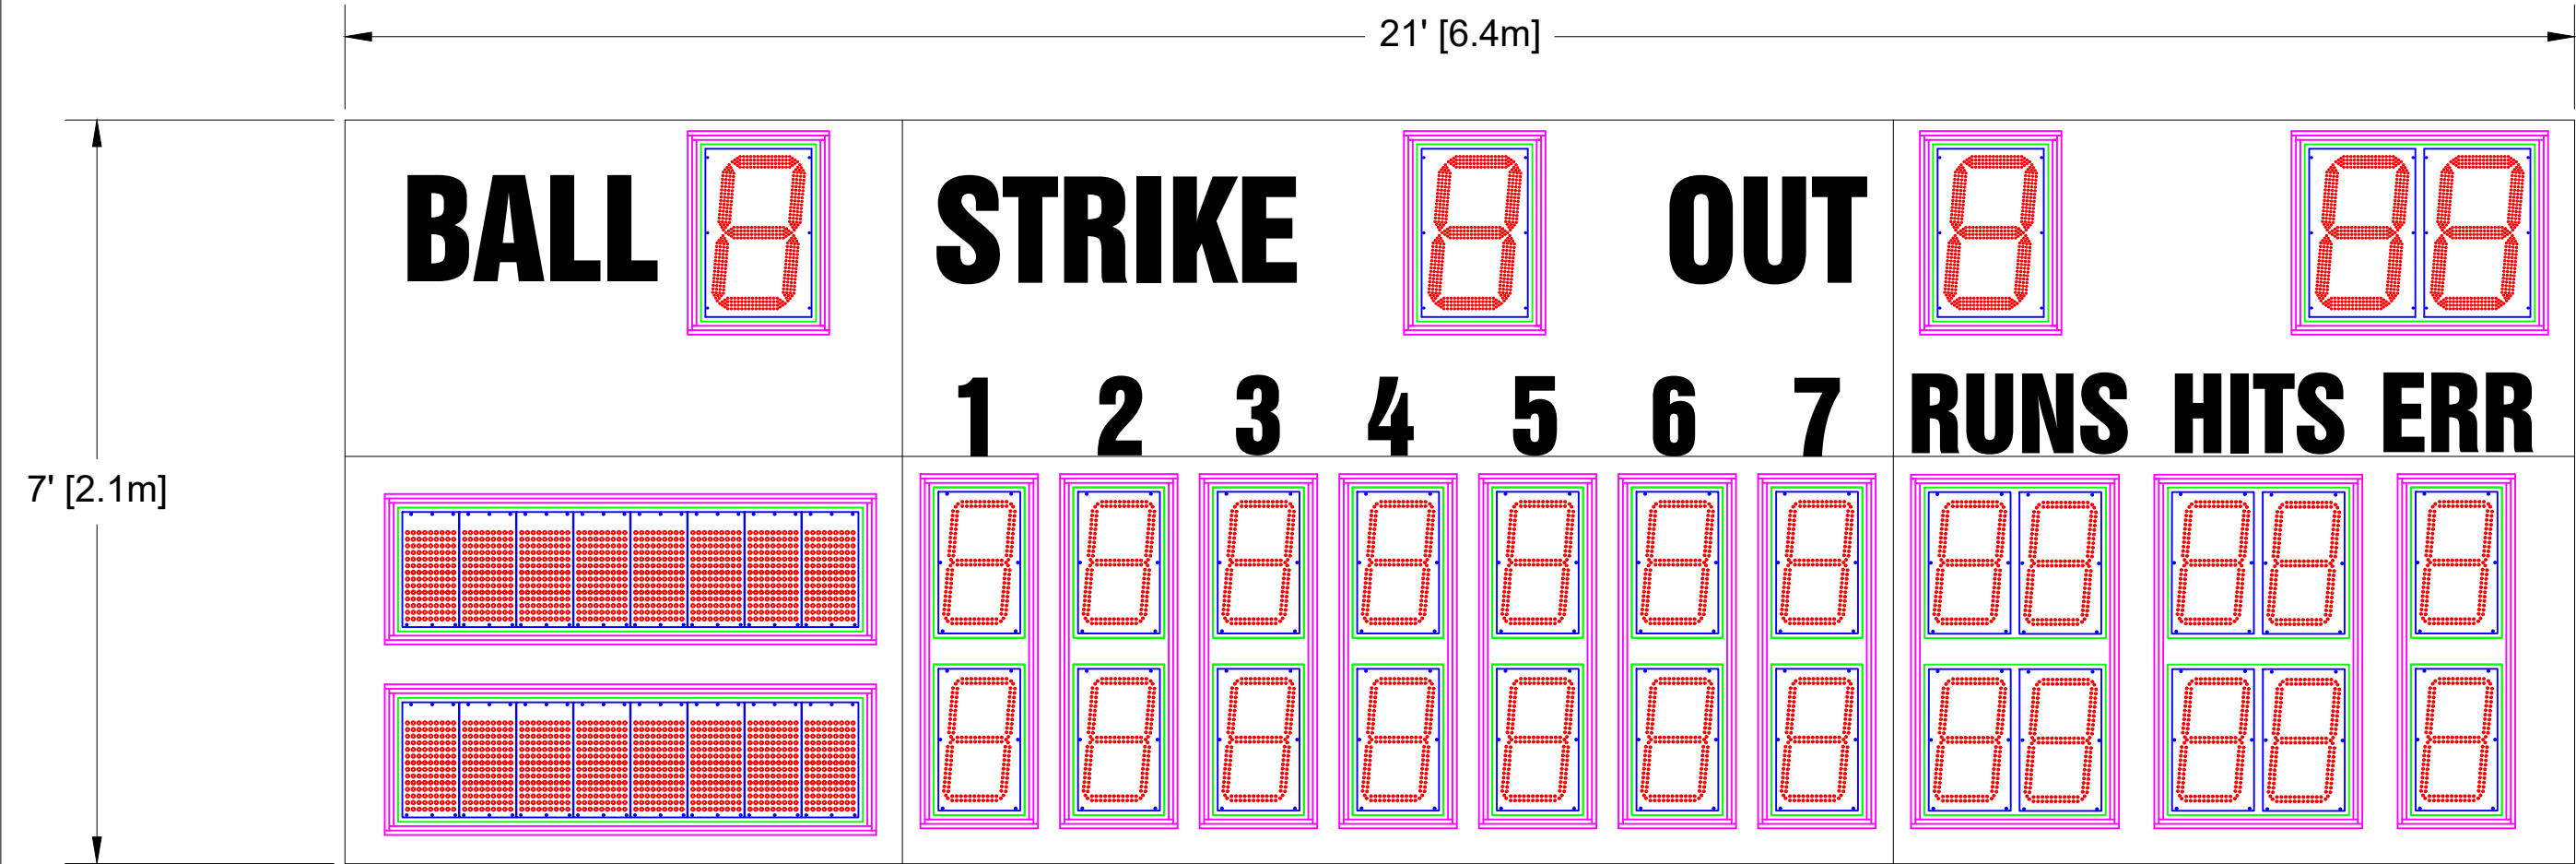

Scoreboard Specifications


Overall size: 21' (W) x 7' (H) x 6" (D)  
Approximate Weight: 957 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the RUNS Digit.

17" LED Digits for BALL, STRIKE, OUT, TIMER  
14" LED Digits for INNINGS, RUNS, HITS, ERR  
10" Electronic Tean Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT  
9" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR

- This Layout is for internal reference only.  
All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/23/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:  OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches  Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
DESCRIPTION <b>OES ELECTRONIC SCOREBOARDS M7121BxCE-TM</b>		SIZE <b>B</b>	REV <b>A</b>
FILENAME M7121BUXE-TM		INIT DRAWING DATE 12/23/21	
USAGE <b>USE FOR REVIEW</b>			
SCALE <b>NTS</b>	DRAWN BY <b>MLI</b>		PAGE 1 OF 1

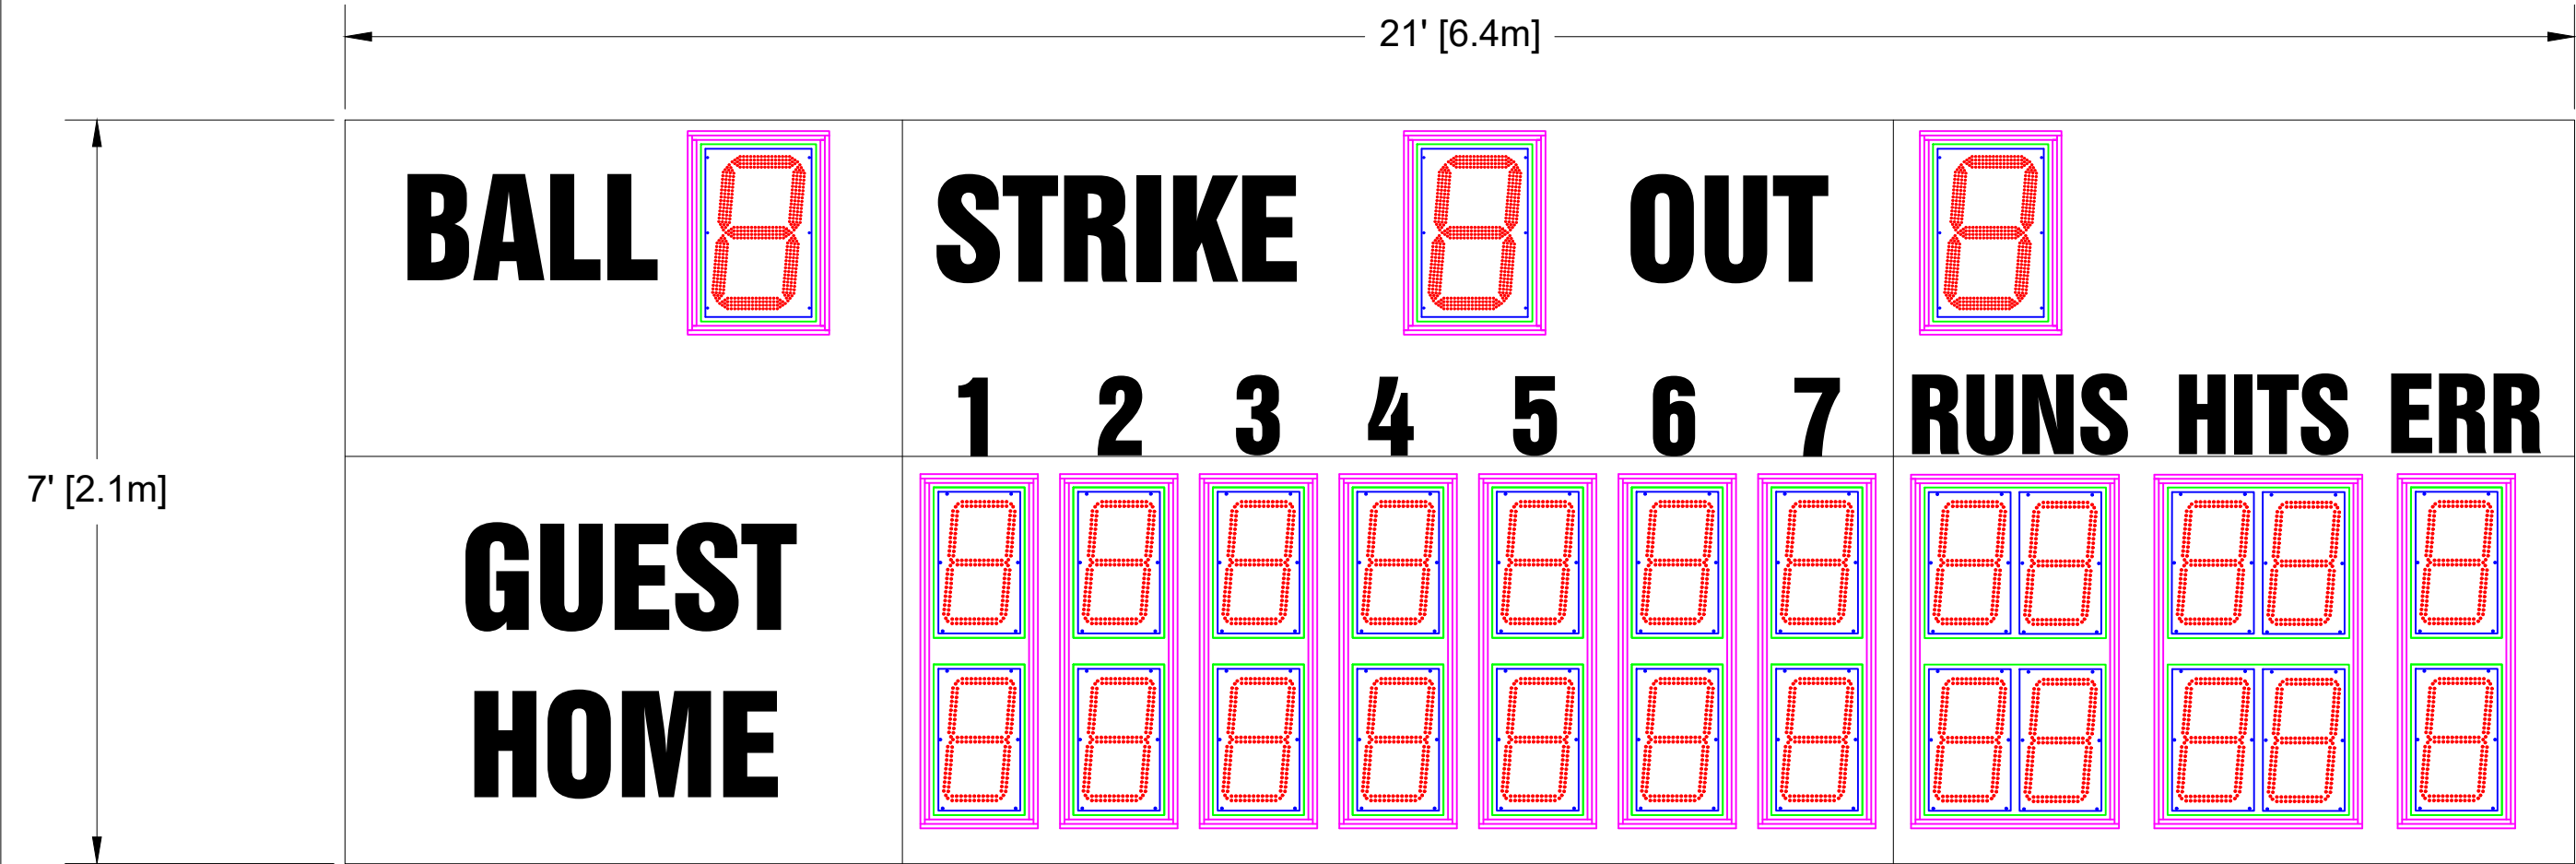

Scoreboard Specifications

Overall size: 21' (W) x 7' (H) x 6" (D)  
Approximate Weight: 957 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the RUNS Digit.


17" LED Digits for BALL, STRIKE, OUT  
14" LED Digits for INNINGS, RUNS, HITS, ERR


12" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, GUEST  
9" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR

This Layout is for internal reference only.  
All LED digits include the following:


- \* Shatter Resistant Lexan cover
- \* Conformal coating to protect from environmental conditions
- \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/16/2021

		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>					
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:  OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		DESCRIPTION <div>OES ELECTRONIC SCOREBOARDS M7121BxCV</div>					
SIZE	FILENAME M7121BUXV	INIT DRAWING DATE 3/16/21		REV			
B	USAGE			A			
USE FOR REVIEW							
SCALE		NTS		DRAWN BY	MLI	PAGE	1 OF 1

TOLERANCE INFORMATION Dimensions are in Inches  Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
--	--	--	--



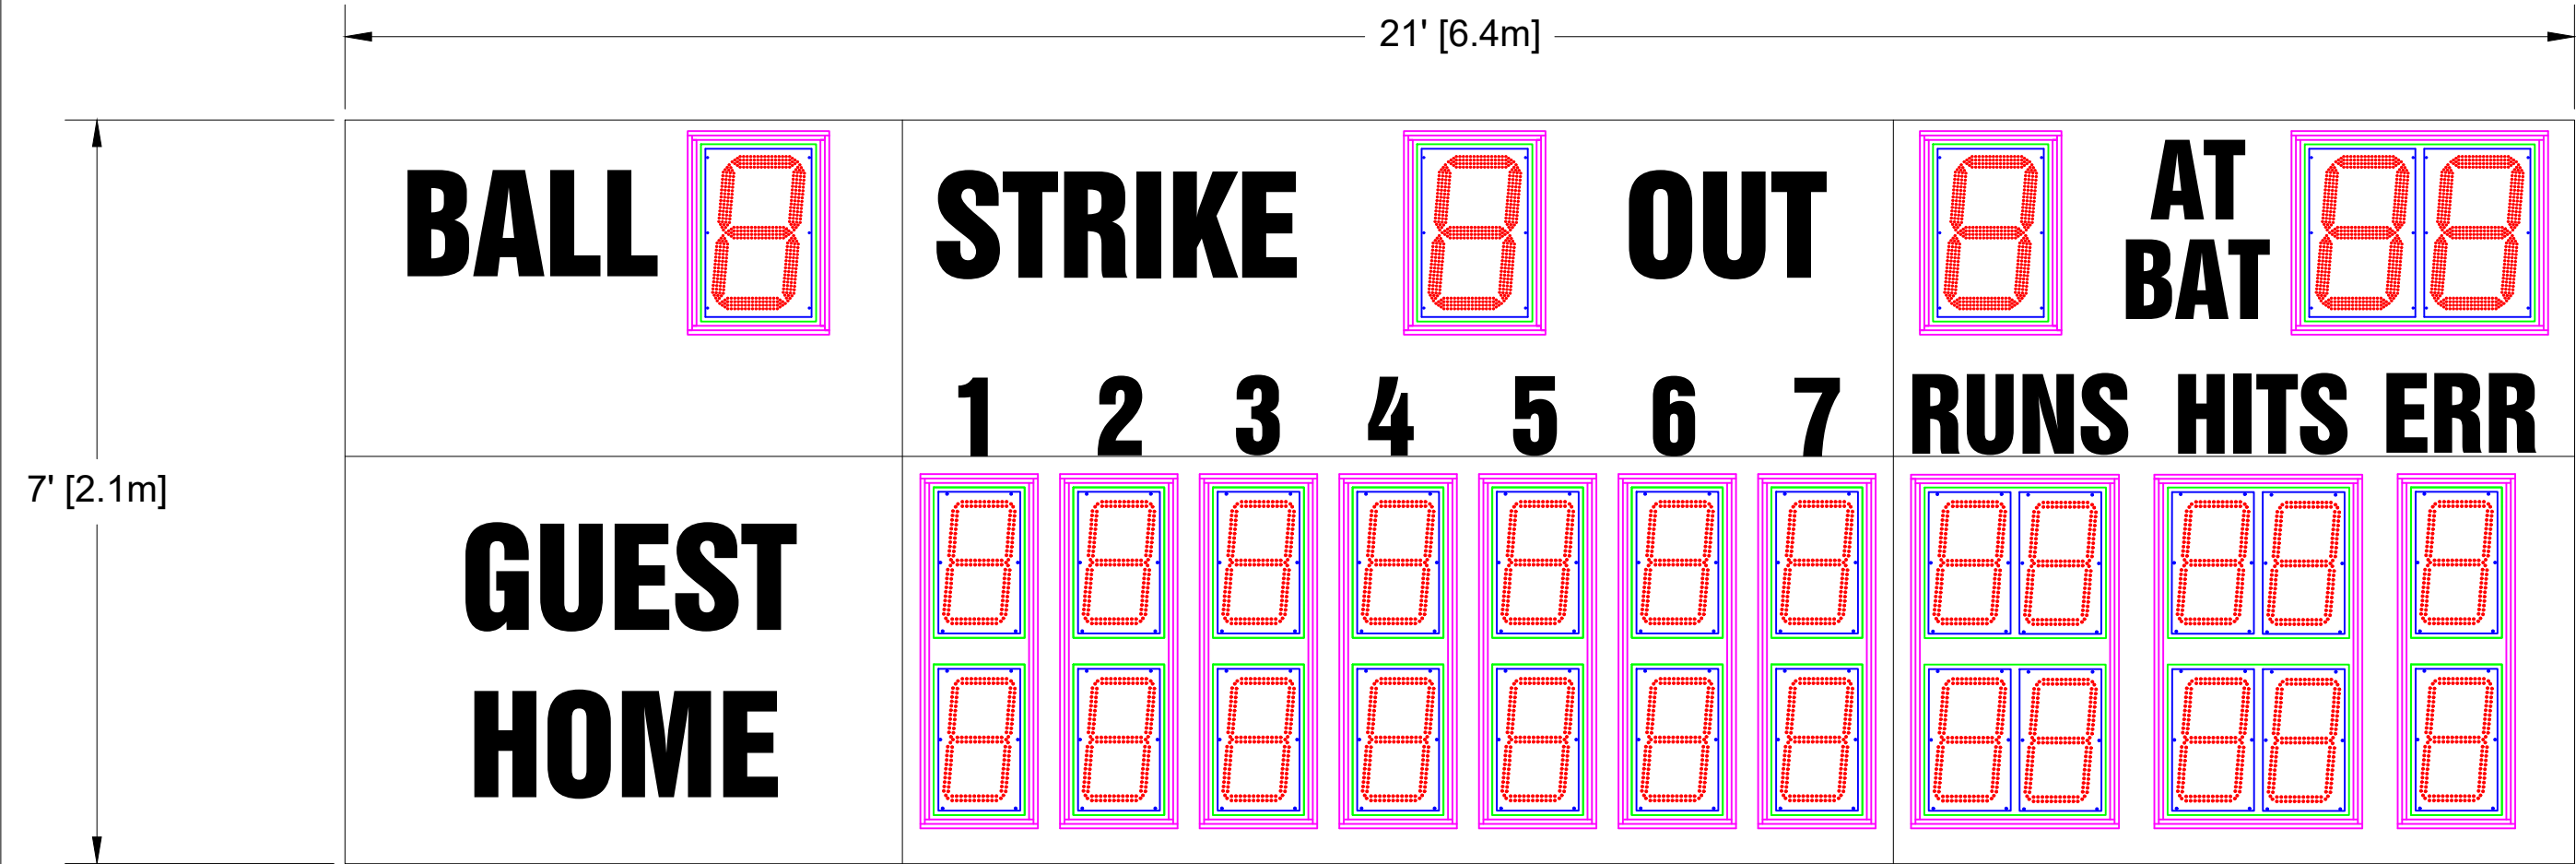

Scoreboard Specifications

Overall size: 21' (W) x 7' (H) x 6" (D)  
Approximate Weight: 957 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the RUNS Digit.

17" LED Digits for BALL, STRIKE, OUT, AT BAT  
14" LED Digits for INNINGS, RUNS, HITS, ERR

12" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, GUEST  
9" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR, AT BAT

- This Layout is for internal reference only.  
All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle


REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/16/2021

		<div><div></div><div>OES</div><div>SCOREBOARDS</div></div> <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
		DESCRIPTION OES ELECTRONIC SCOREBOARDS M7121BxCV-AB	
SIZE	FILENAME M7121BUXV-AB	INIT DRAWING DATE 3/16/21	REV
B	USAGE USE FOR REVIEW		A
SCALE	NTS	DRAWN BY MLI	PAGE 1 OF 1

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:  
  
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION  
Dimensions are in Inches  
  
Fractional ± 1/16"  
Two Place Decimals ± 0.02"  
Three Place Decimals ± 0.005"  
Four Place Decimals ± 0.0005"  
Angular ± 30°

THIRD ANGLE PROJECTIONS

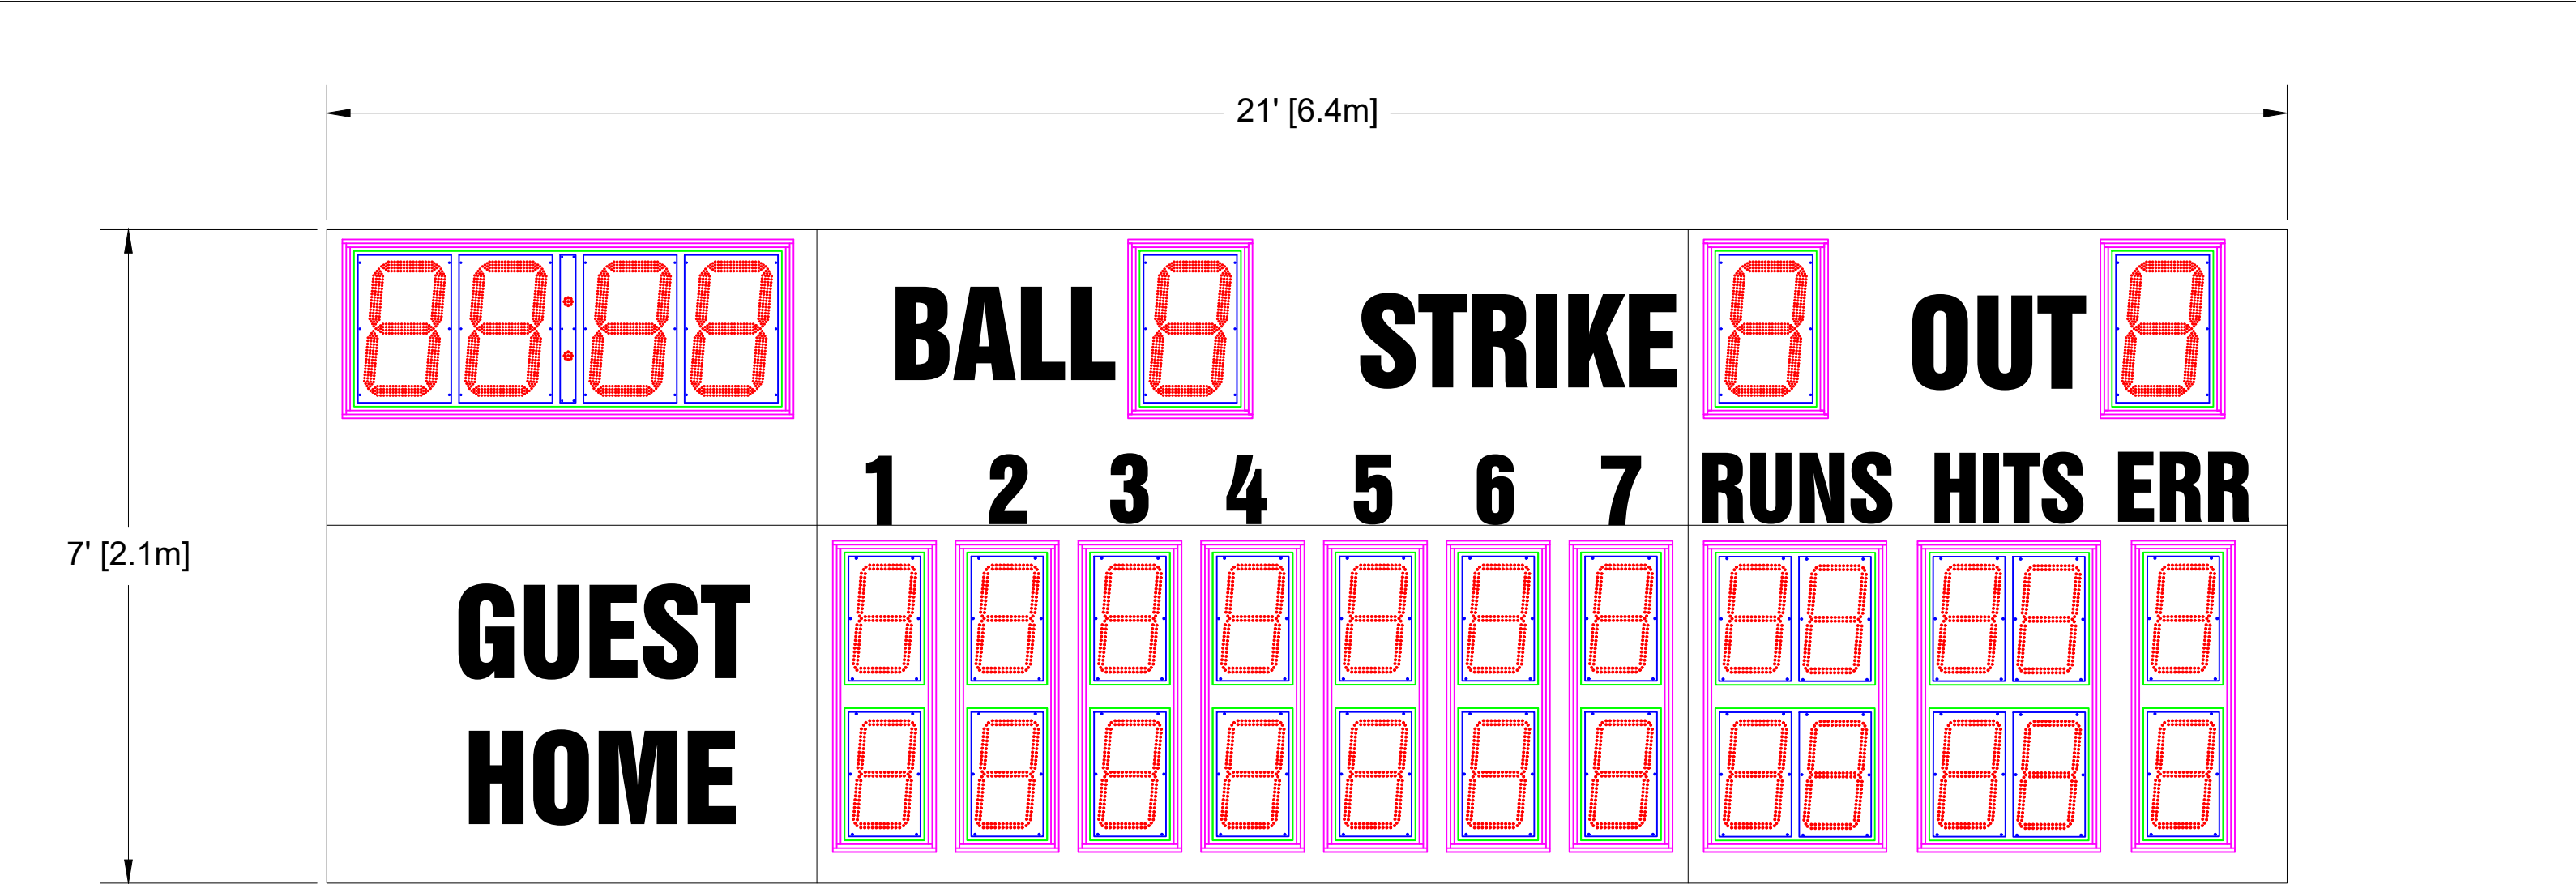

**Scoreboard Specifications**

Overall size: 21' (W) x 7' (H) x 6" (D)  
Approximate Weight: 957 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the RUNS Digit.


17" LED Digits for BALL, STRIKE, OUT, TIME  
14" LED Digits for INNINGS, RUNS, HITS, ERR


12" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, GUEST  
9" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR

All LED digits include the following:


- \* Shatter Resistant Lexan cover
- \* Conformal coating to protect from environmental conditions
- \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/26/2021

		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
		DESCRIPTION OES ELECTRONIC SCOREBOARDS M7121BxCV-CL	
SIZE	FILENAME M7121BUXV-CL	INIT DRAWING DATE 3/26/21	REV A
B	USAGE USE FOR REVIEW		
SCALE NTS		DRAWN BY MLI	PAGE 1 OF 1

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches  Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30'</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>
---	--	---



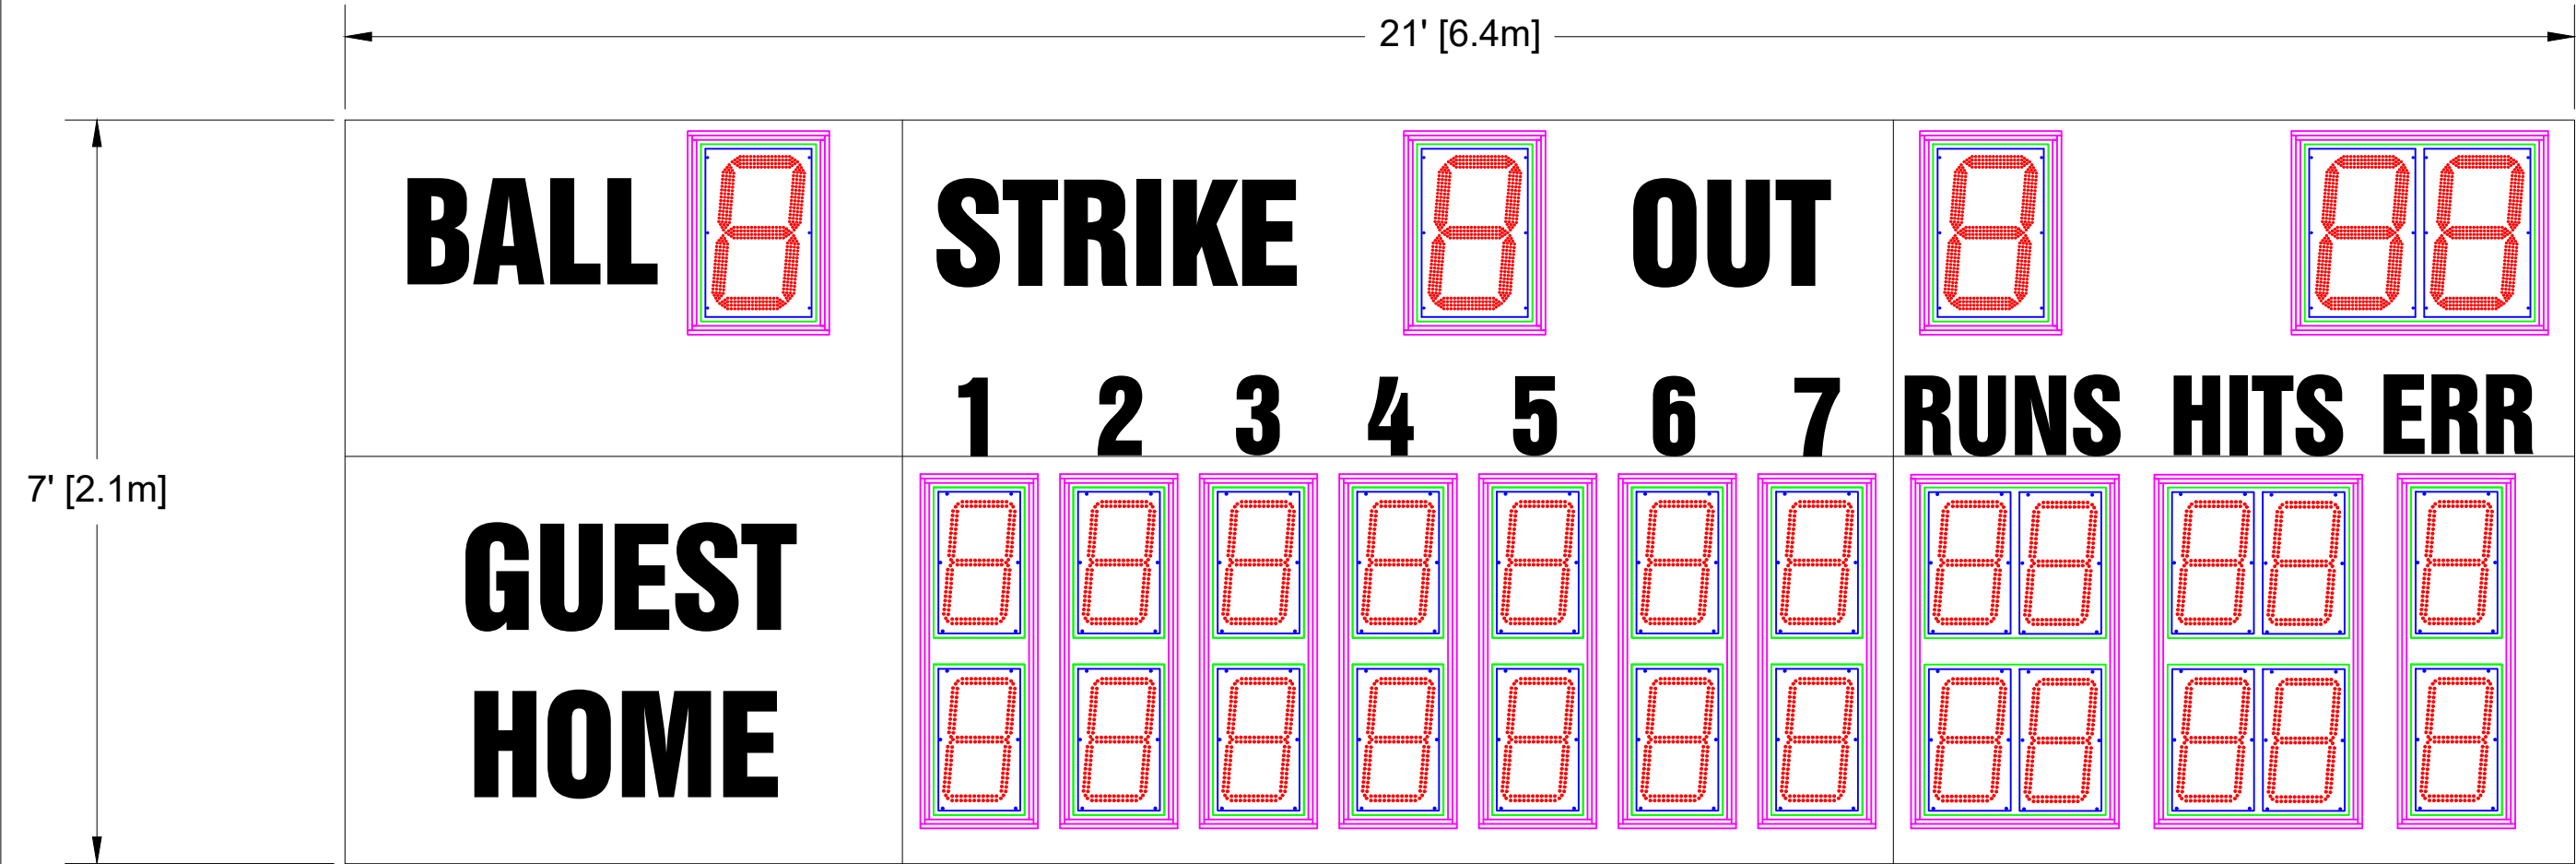

**Scoreboard Specifications**  
Overall size: 21' (W) x 7' (H) x 6" (D)  
Approximate Weight: 957 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the RUNS Digit.


17" LED Digits for BALL, STRIKE, OUT, LAST PLAY  
14" LED Digits for INNINGS, RUNS, HITS, ERR

12" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, GUEST  
9" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR

This Layout is for internal reference only.  
All LED digits include the following:

- \* Shatter Resistant Lexan cover
- \* Conformal coating to protect from environmental conditions
- \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/23/2021
		<div><div></div><div><div>OES</div><div>SCOREBOARDS</div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
		DESCRIPTION OES ELECTRONIC SCOREBOARDS M7121BxCV-LP	
SIZE	FILENAME M7121BUXV-LP	INIT DRAWING DATE 12/23/21	REV
B	USAGE USE FOR REVIEW		A
TOLERANCE INFORMATION Dimensions are in Inches  Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
SCALE	NTS	DRAWN BY MLI	PAGE 1 OF 1

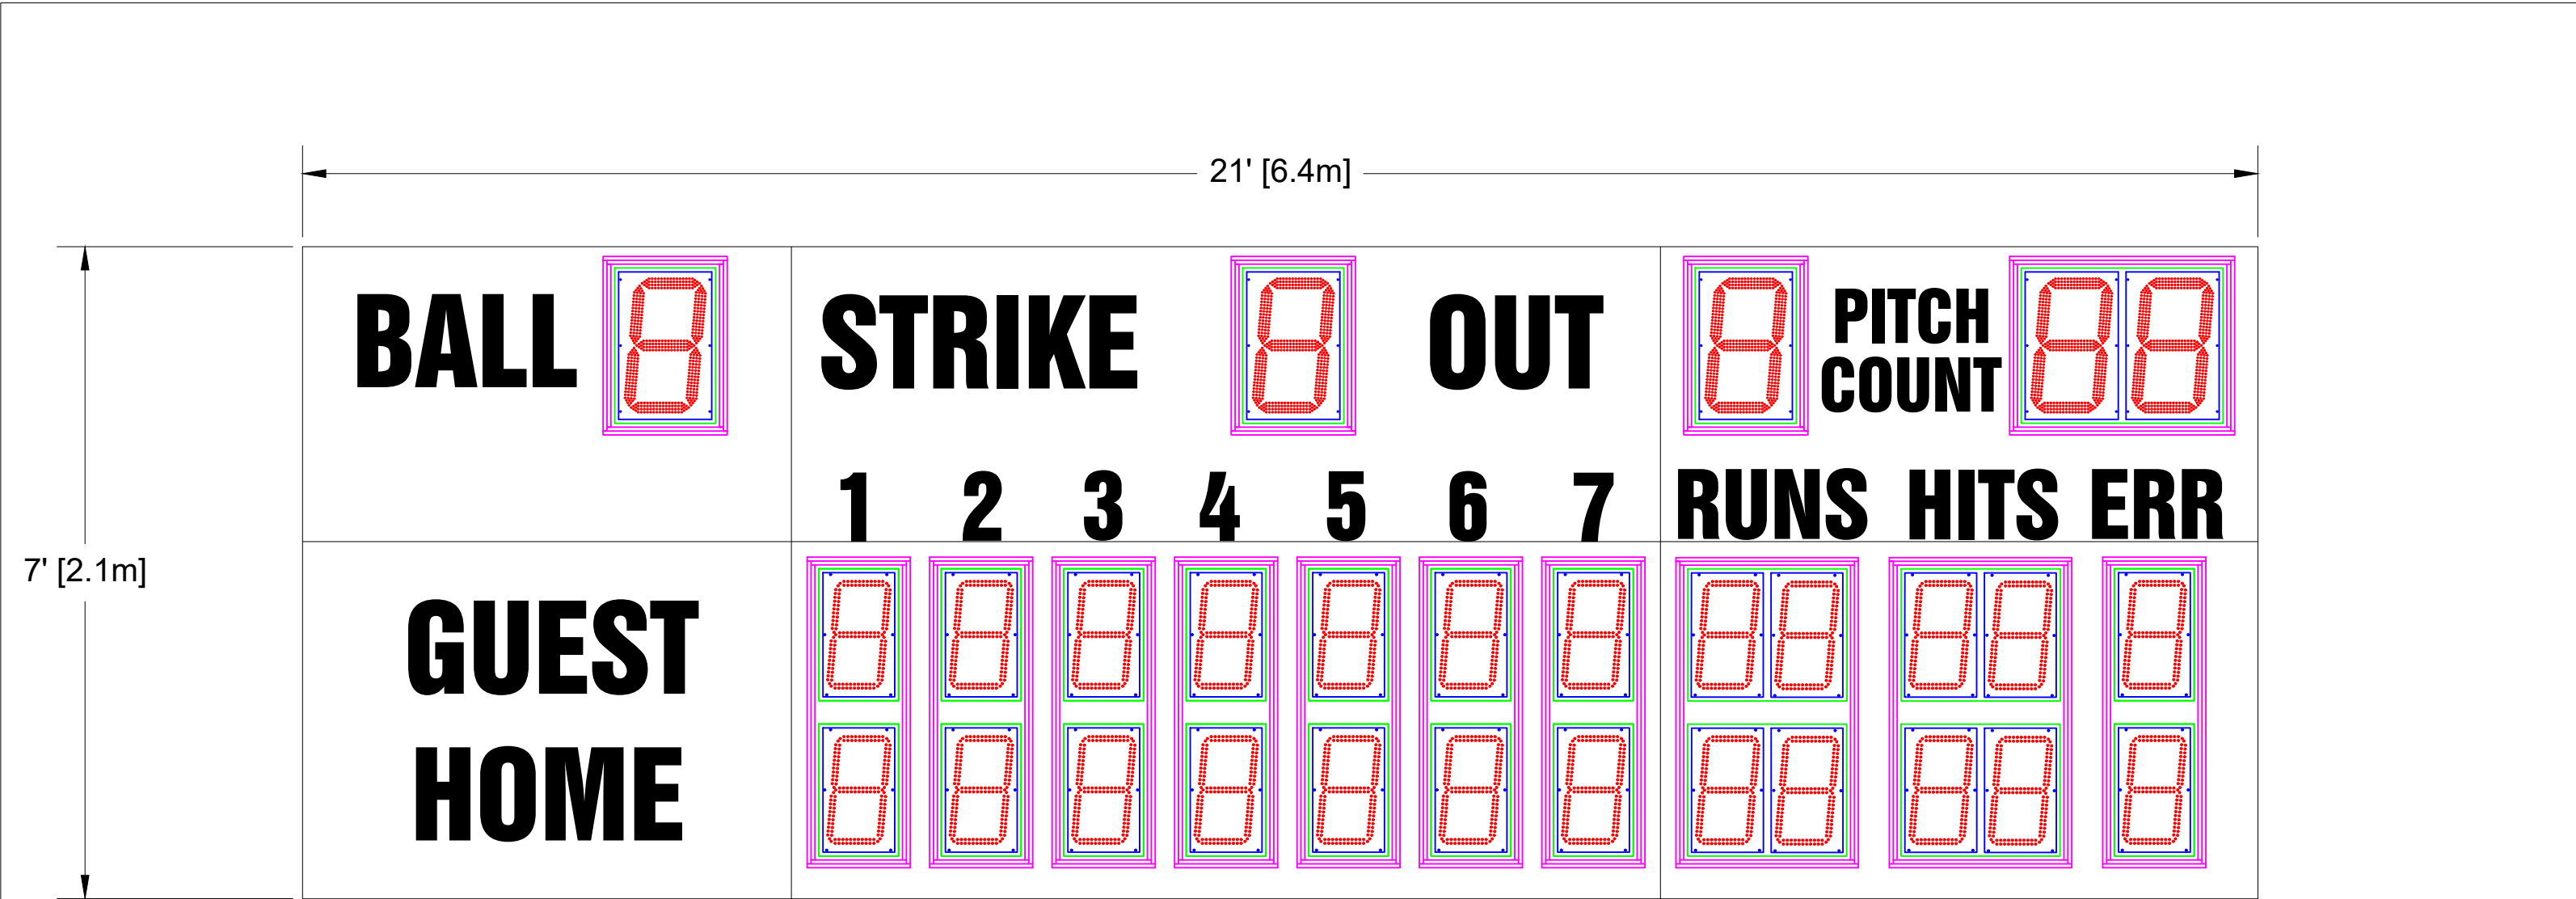

**Scoreboard Specifications**

Overall size: 21' (W) x 7' (H) x 6" (D)  
Approximate Weight: 957 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the RUNS Digit.


- 17" LED Digits for BALL, STRIKE, OUT, PITCH COUNT
- 14" LED Digits for INNINGS, RUNS, HITS, ERR
- 12" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, GUEST
- 9" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR
- 7" White Vinyl Lettering for PITCH COUNT


This Layout is for internal reference only.  
All LED digits include the following:

- \* Shatter Resistant Lexan cover
- \* Conformal coating to protect from environmental conditions
- \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/16/2021

		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:  OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		DESCRIPTION <div>OES ELECTRONIC SCOREBOARDS M7121BxCV-PC</div>	
SIZE	FILENAME M7121BUXV-PC	INIT DRAWING DATE 3/16/21	REV A
B	USAGE USE FOR REVIEW		
SCALE NTS		DRAWN BY MLI	PAGE 1 OF 1

<div>TOLERANCE INFORMATION Dimensions are in Inches  Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>	<div>THIRD ANGLE PROJECTIONS</div> <div></div>
--	---

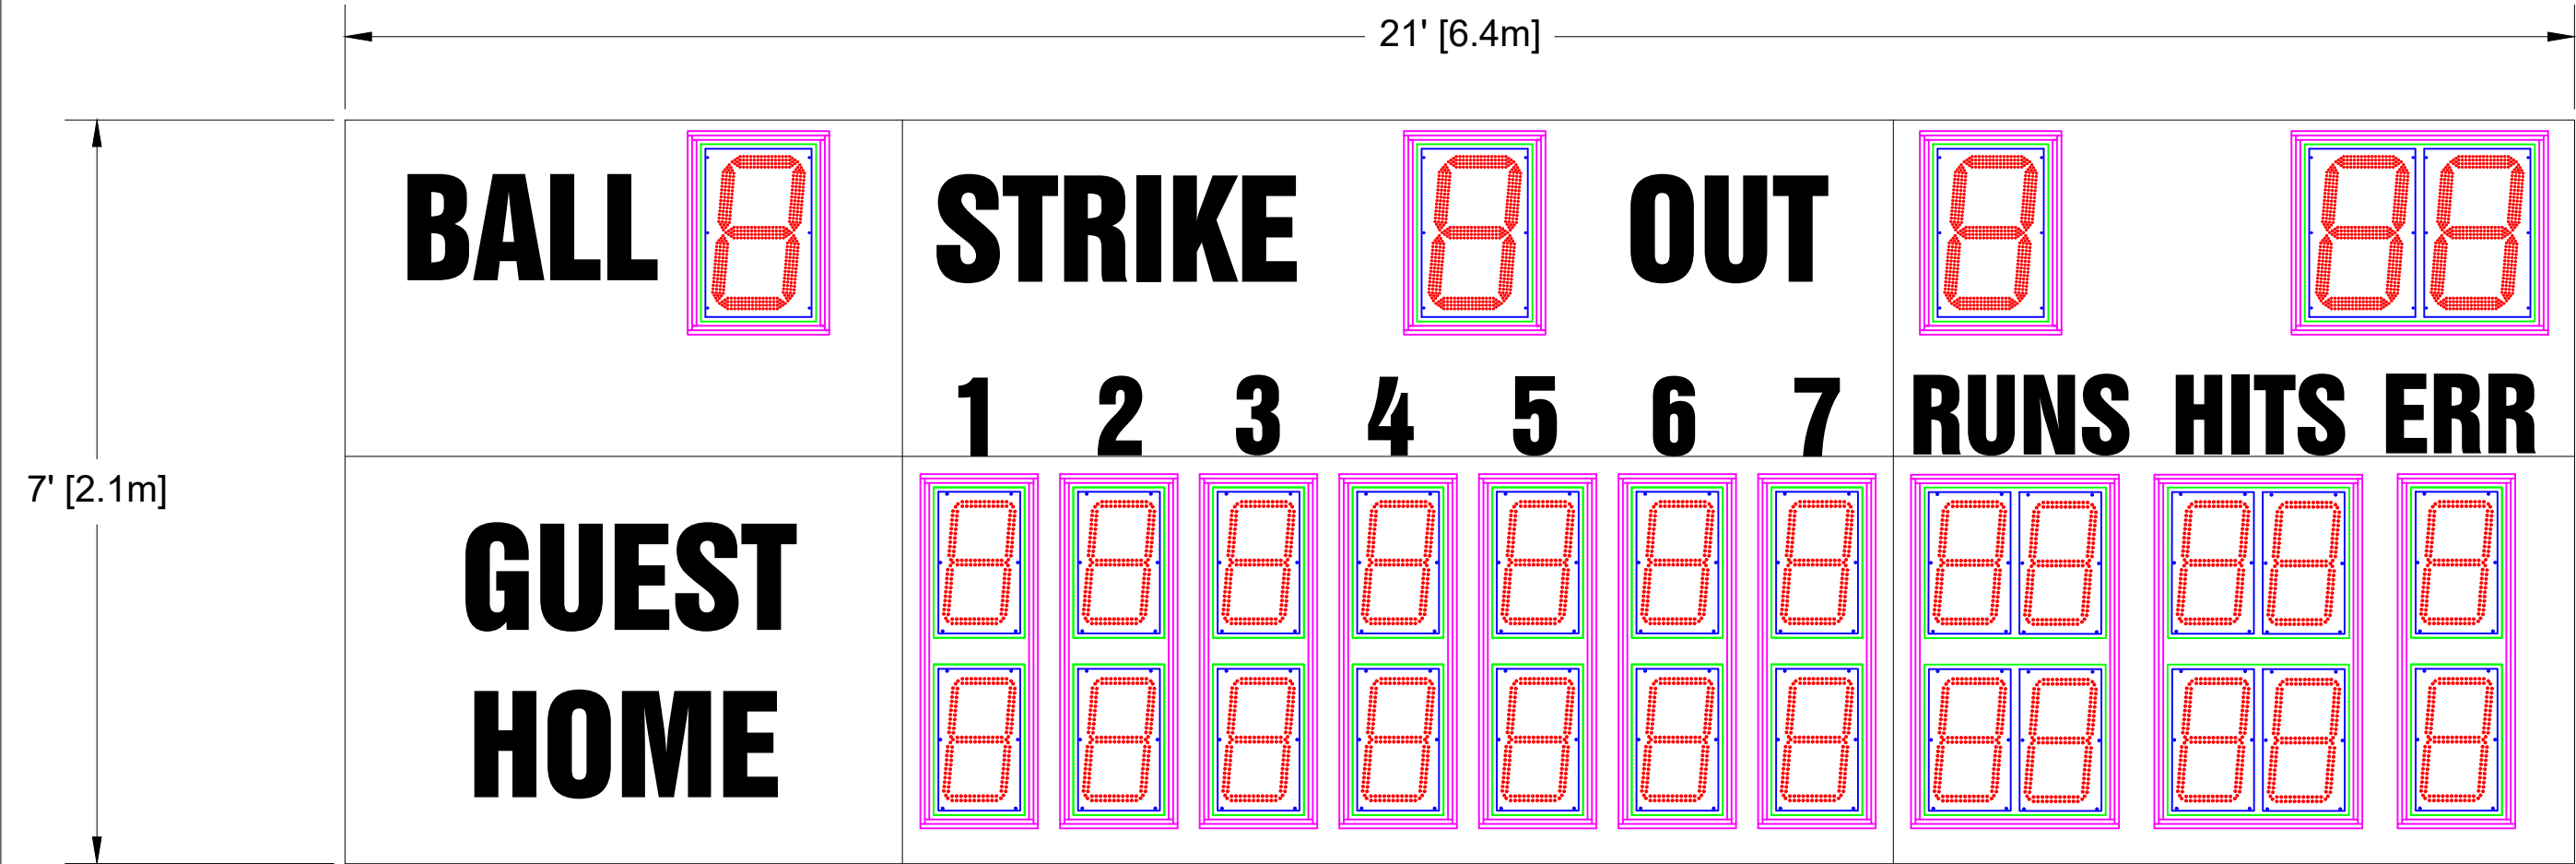



Scoreboard Specifications

Overall size: 21' (W) x 7' (H) x 6" (D)  
Approximate Weight: 957 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the RUNS Digit.

17" LED Digits for BALL, STRIKE, OUT, TIMER  
14" LED Digits for INNINGS, RUNS, HITS, ERR

12" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, GUEST  
9" White Vinyl Lettering for INNINGS, RUNS, HITS, ERR

- This Layout is for internal reference only.  
All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE			
A	INITIAL DESIGN	OES	3/16/2021			
		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>				
<u>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</u>						
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		DESCRIPTION				
		OES ELECTRONIC SCOREBOARDS M7121BxCV-TM				
TOLERANCE INFORMATION Dimensions are in Inches  Fractional $\pm 1/16"$ Two Place Decimals $\pm 0.02"$ Three Place Decimals $\pm 0.005"$ Four Place Decimals $\pm 0.0005"$ Angular $\pm 30^\circ$	<div>THIRD ANGLE PROJECTIONS</div> 	SIZE	FILENAME M7121BUXV-TM	INIT DRAWING DATE 3/16/21	REV	
		B	USAGE	USE FOR REVIEW		A
		SCALE	NTS	DRAWN BY	MLI	PAGE