

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the 7th Inning Digit.

17" LED Digits for AT BAT, BALL, STRIKE, OUT, LAST PLAY
14" LED Digits for INNINGS, RUNS, HITS, ERR
10" Electronic Team Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT
9" White Vinyl Lettering for INNINGS, AT BAT
8" White Vinyl Lettering for RUNS, HITS, ERR

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/27/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M7125AxCE-AB		SIZE B	REV A
FILENAME M7125AUXE-AB		INIT DRAWING DATE 3/27/21	
USAGE USE FOR REVIEW			
SCALE NTS	DRAWN BY MLI	PAGE 1 OF 1	

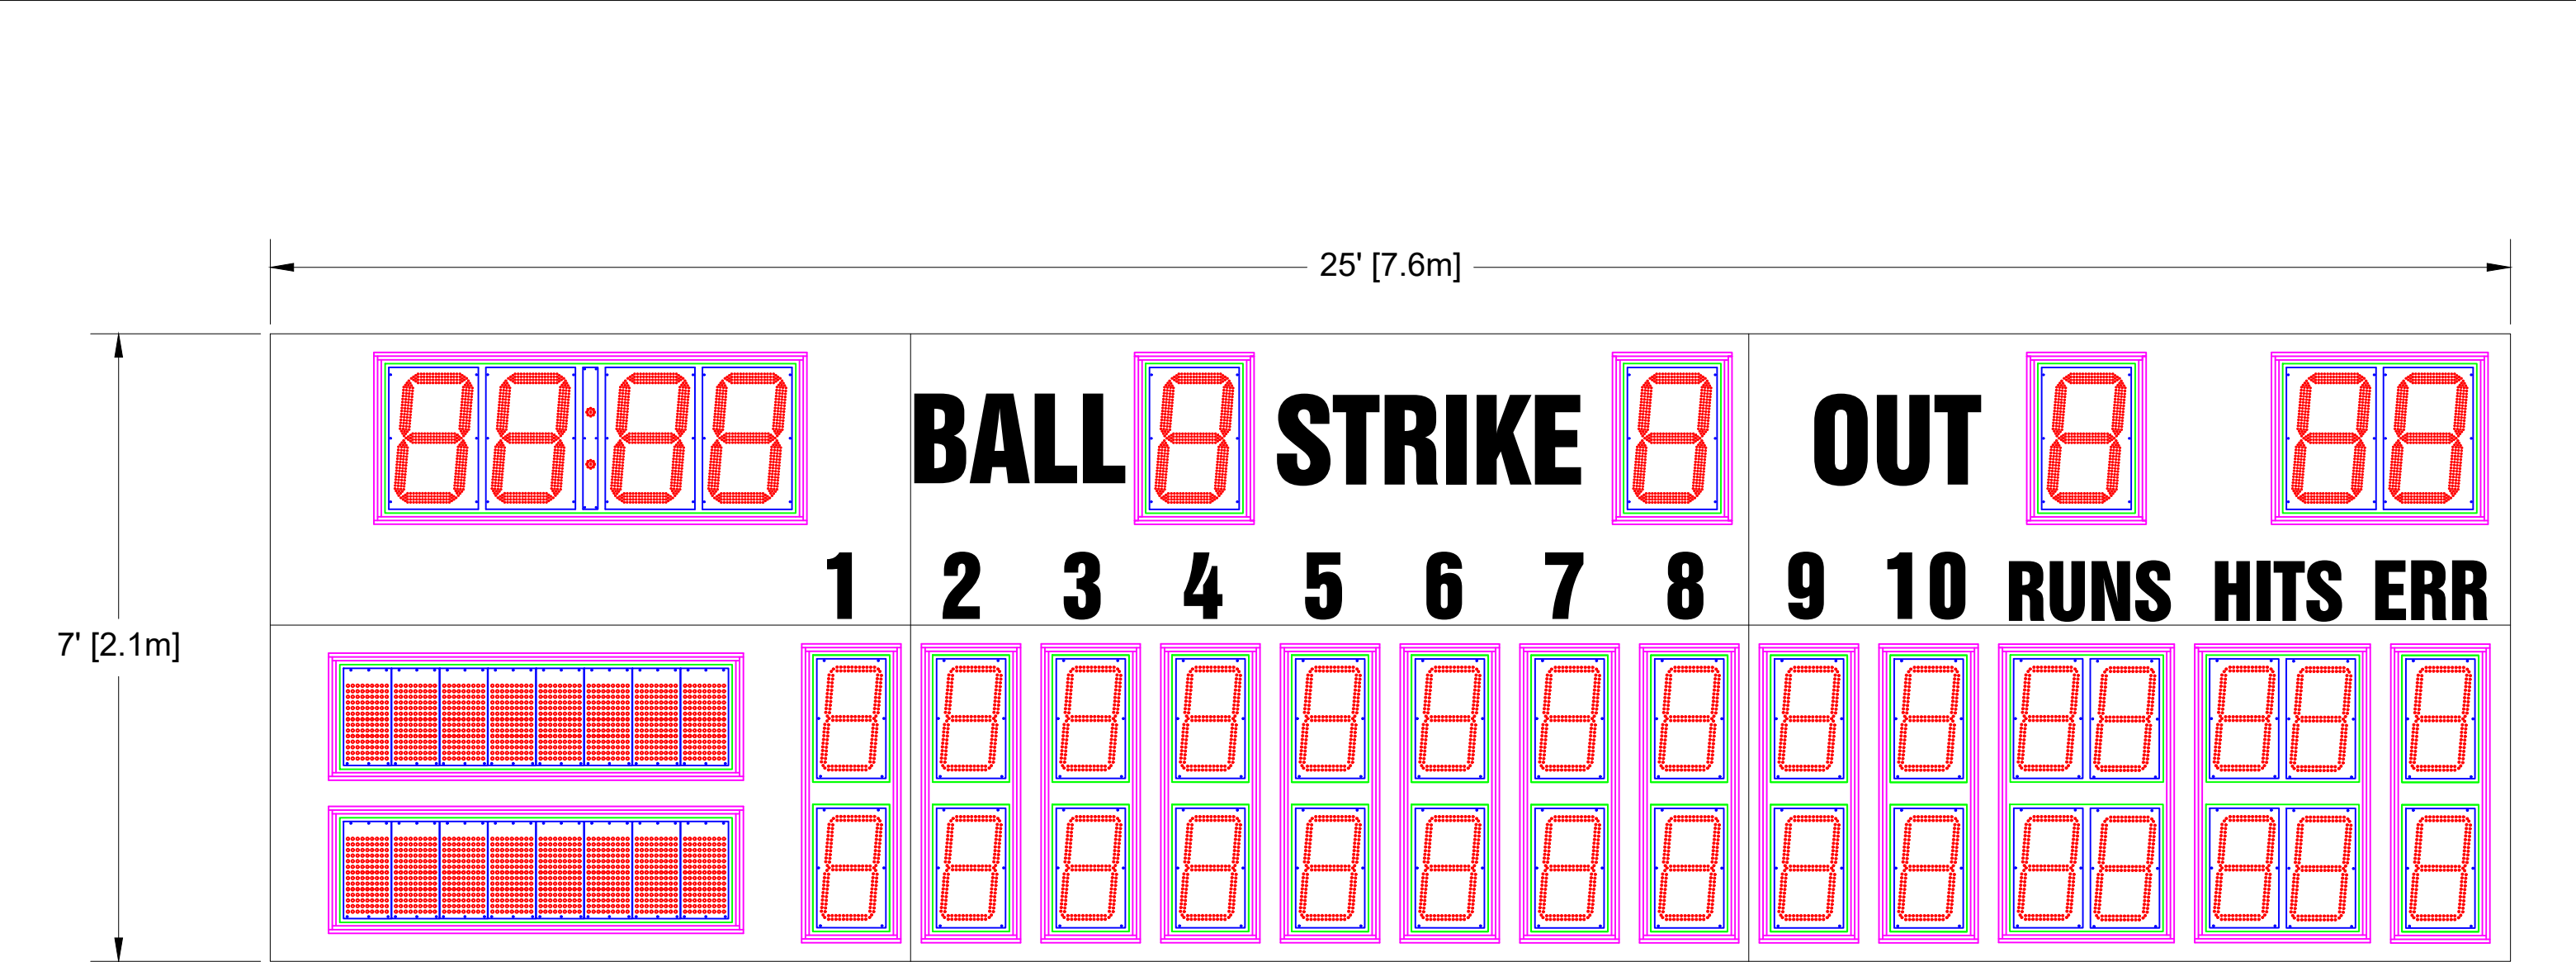

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the 7th Inning Digit.

17" LED Digits for TIME, BALL, STRIKE, OUT, LAST PLAY
14" LED Digits for INNINGS, RUNS, HITS, ERR
10" Electronic Team Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT
8" White Vinyl Lettering for RUNS, HITS, ERR

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/24/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES SCOREBOARDS	
DESCRIPTION		OES ELECTRONIC SCOREBOARDS M7125AxCE-CL	
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7125AUXE-CL	12/24/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE
		MLI	1 OF 1

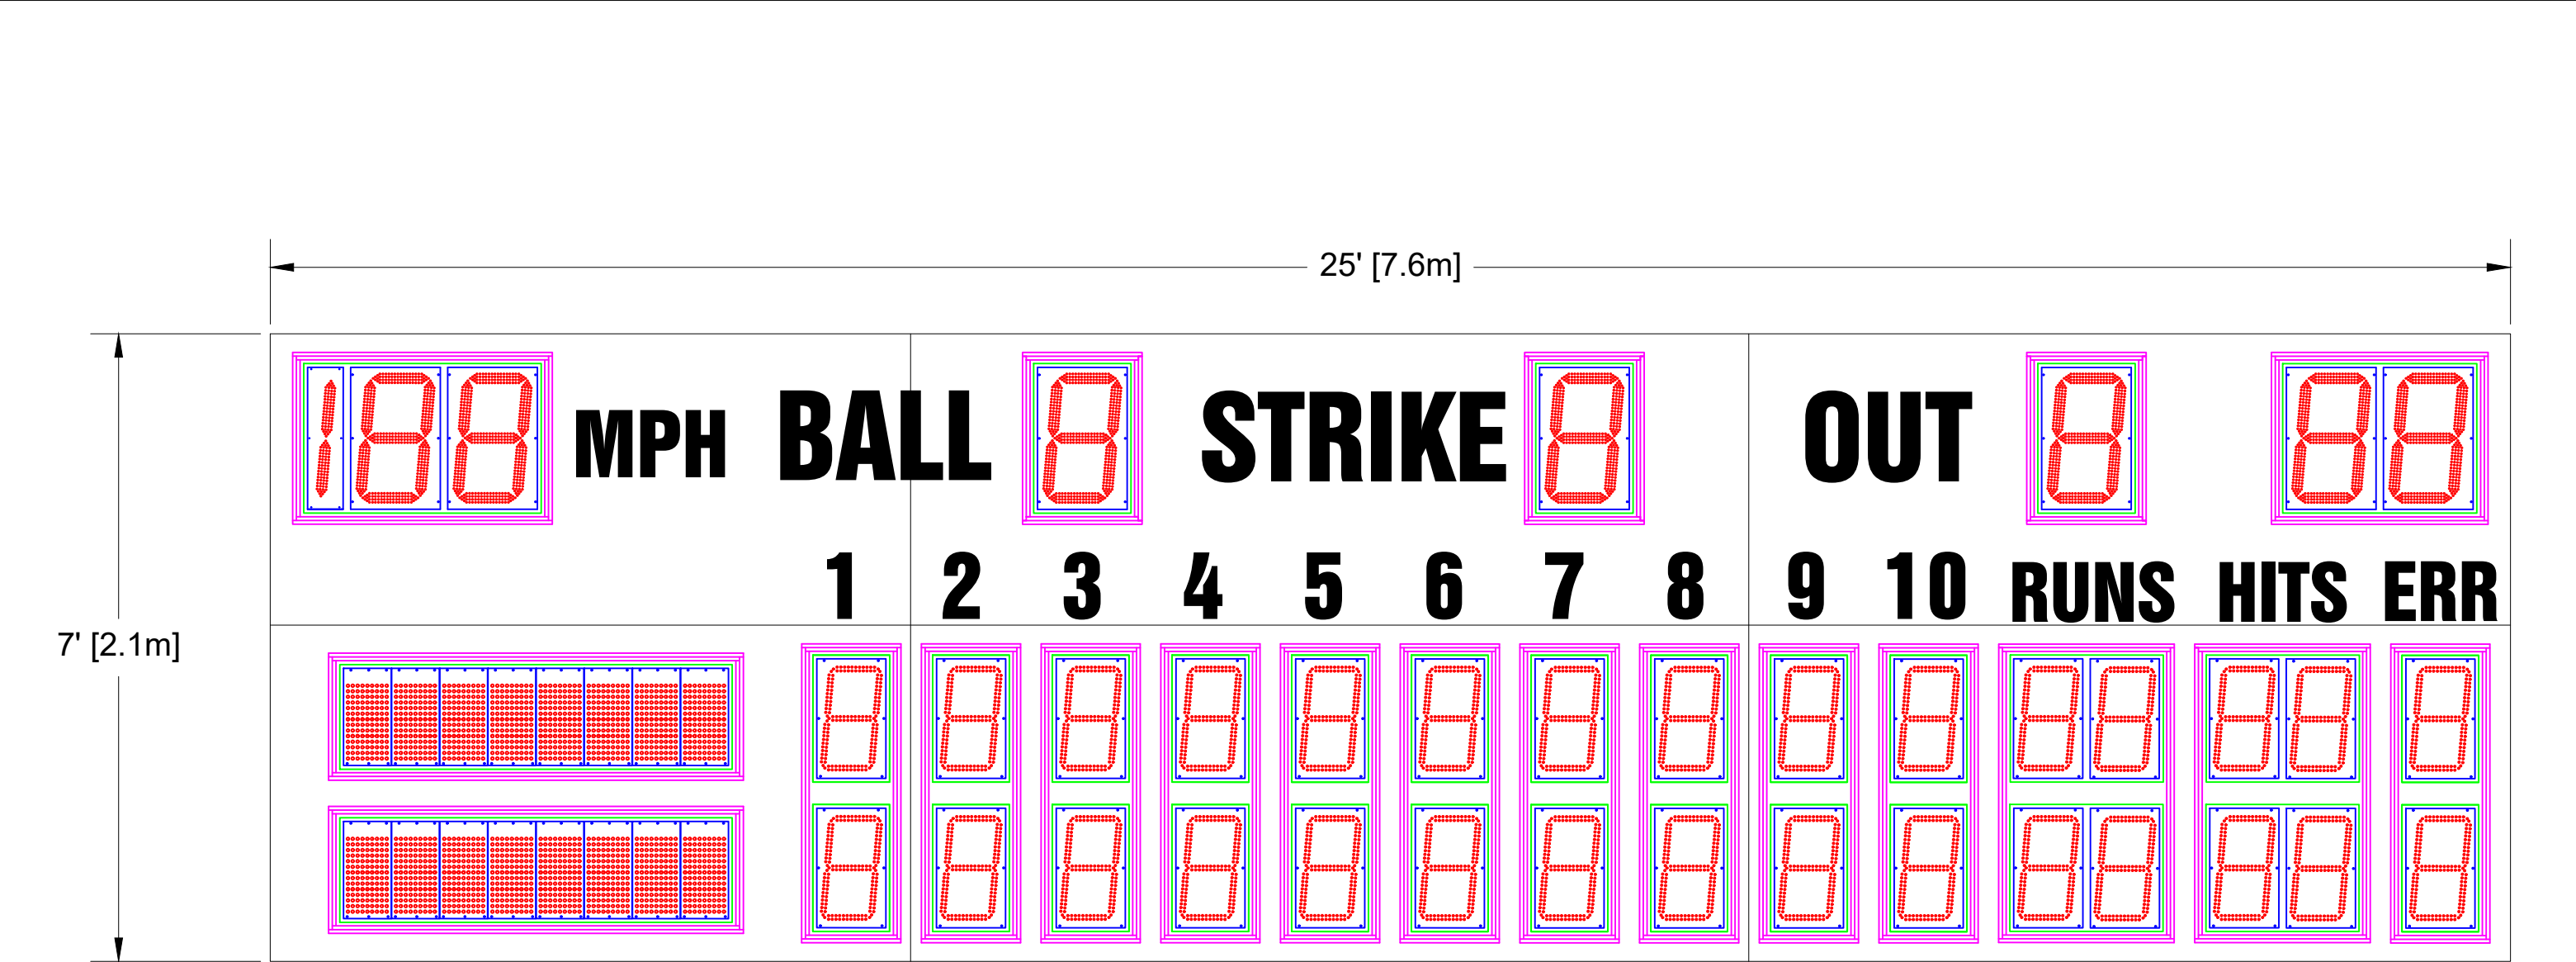

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.


17" LED Digits for MPH, BALL, STRIKE, OUT, LAST PLAY
14" LED Digits for INNINGS, RUNS, HITS, ERR
10" Electronic Team Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT
9" White Vinyl Lettering for INNINGS, MPH
8" White Vinyl Lettering for RUNS, HITS, ERR

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/27/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M7125AxCE-MP		SIZE B	REV A
FILENAME M7125AUXE-MP		INIT DRAWING DATE 3/27/21	USE FOR REVIEW
SCALE NTS		DRAWN BY MLI	PAGE 1 OF 1

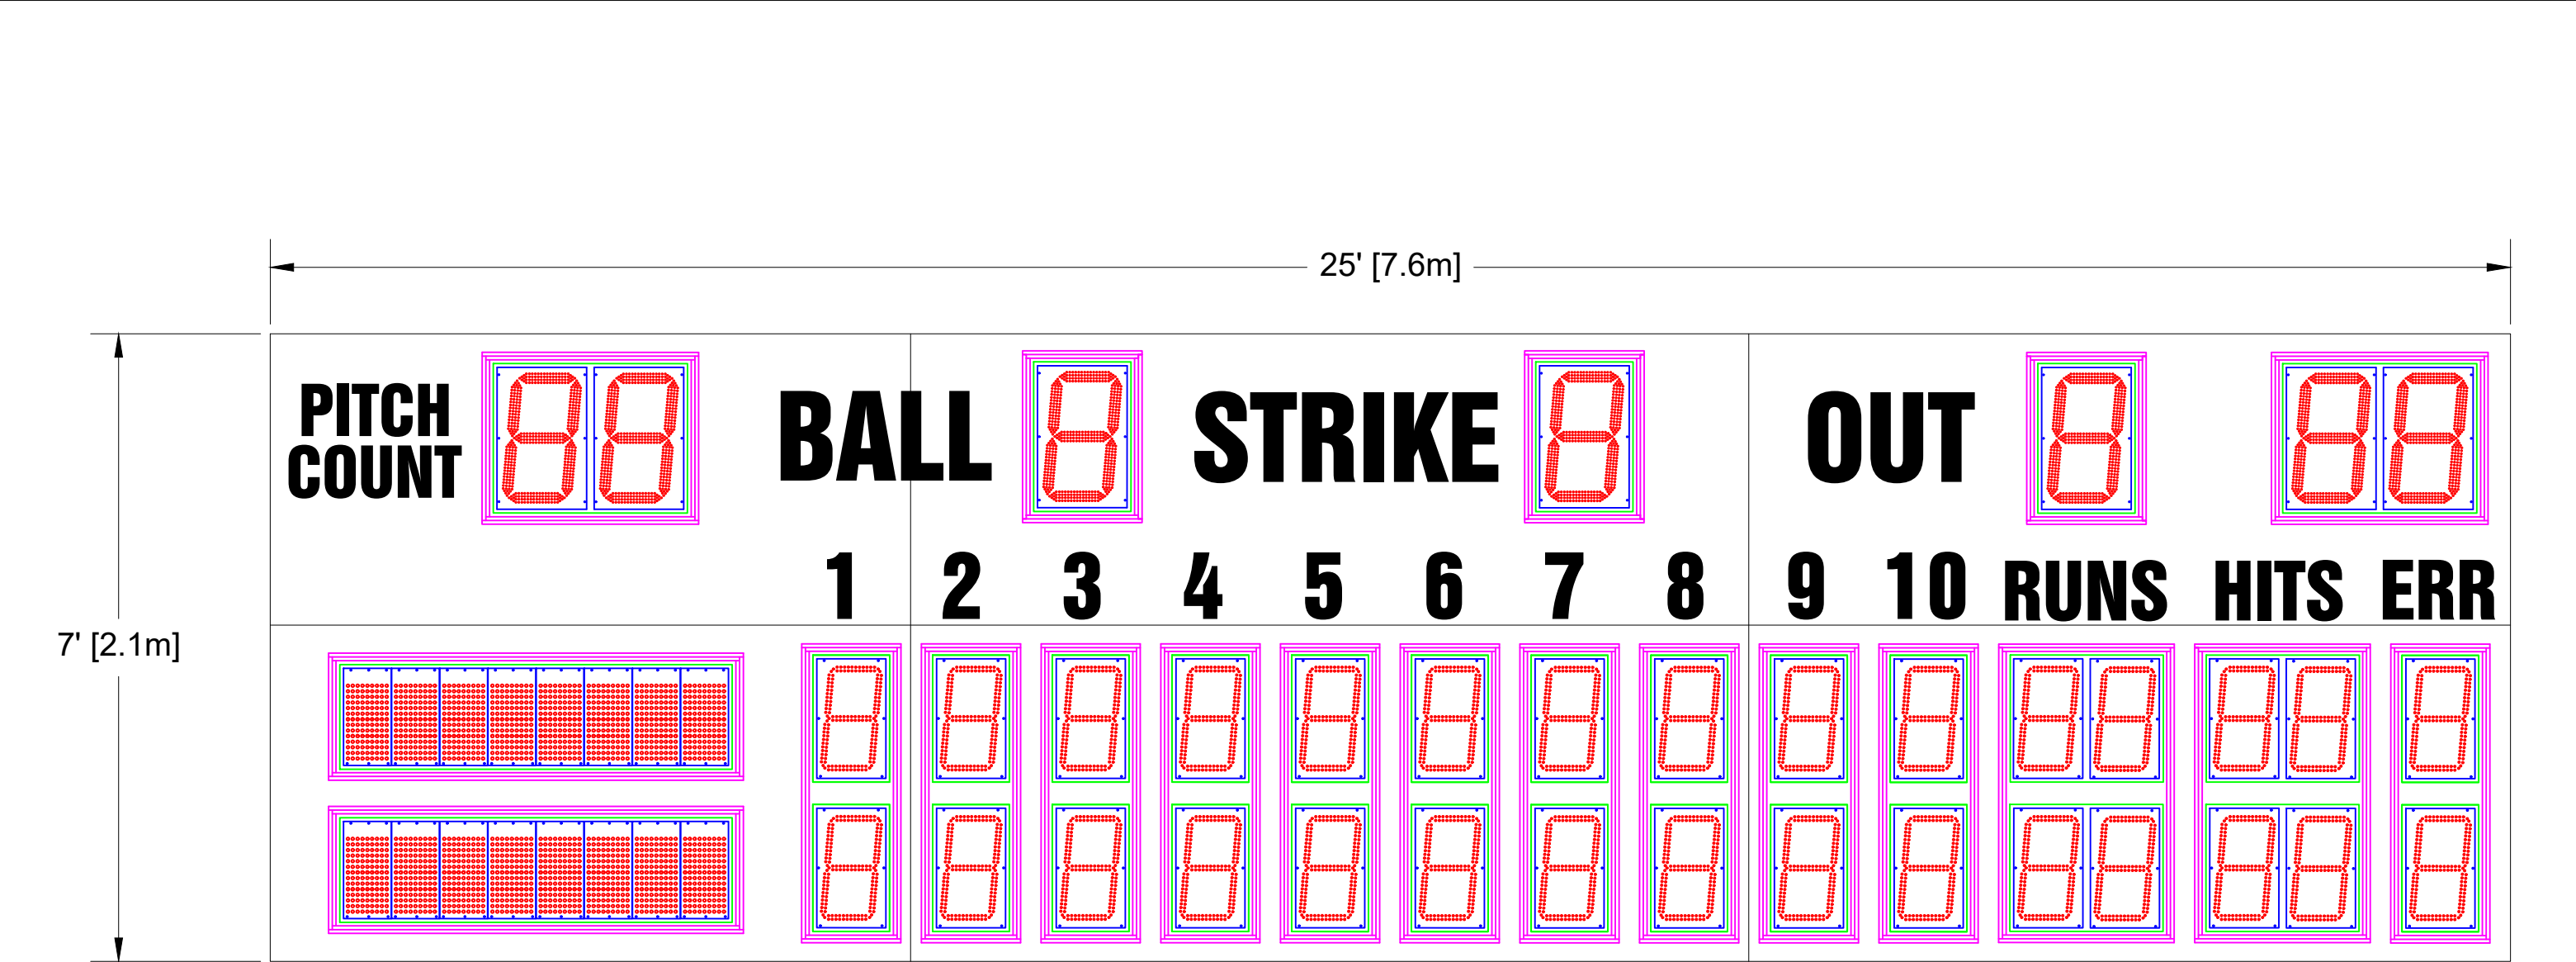

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.


17" LED Digits for PITCH COUNT, BALL, STRIKE, OUT, LAST PLAY
14" LED Digits for INNINGS, RUNS, HITS, ERR
10" Electronic Team Names at 10 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT
9" White Vinyl Lettering for INNINGS
8" White Vinyl Lettering for RUNS, HITS, ERR
7" White Vinyl Lettering for PITCH COUNT

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/27/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES ELECTRONIC SCOREBOARDS M7125AxCE-PC	
SIZE B	FILENAME M7125AUXE-PC	INIT DRAWING DATE 3/27/21	REV A
SCALE NTS		DRAWN BY MLI	
PAGE 1 OF 1		USE FOR REVIEW	

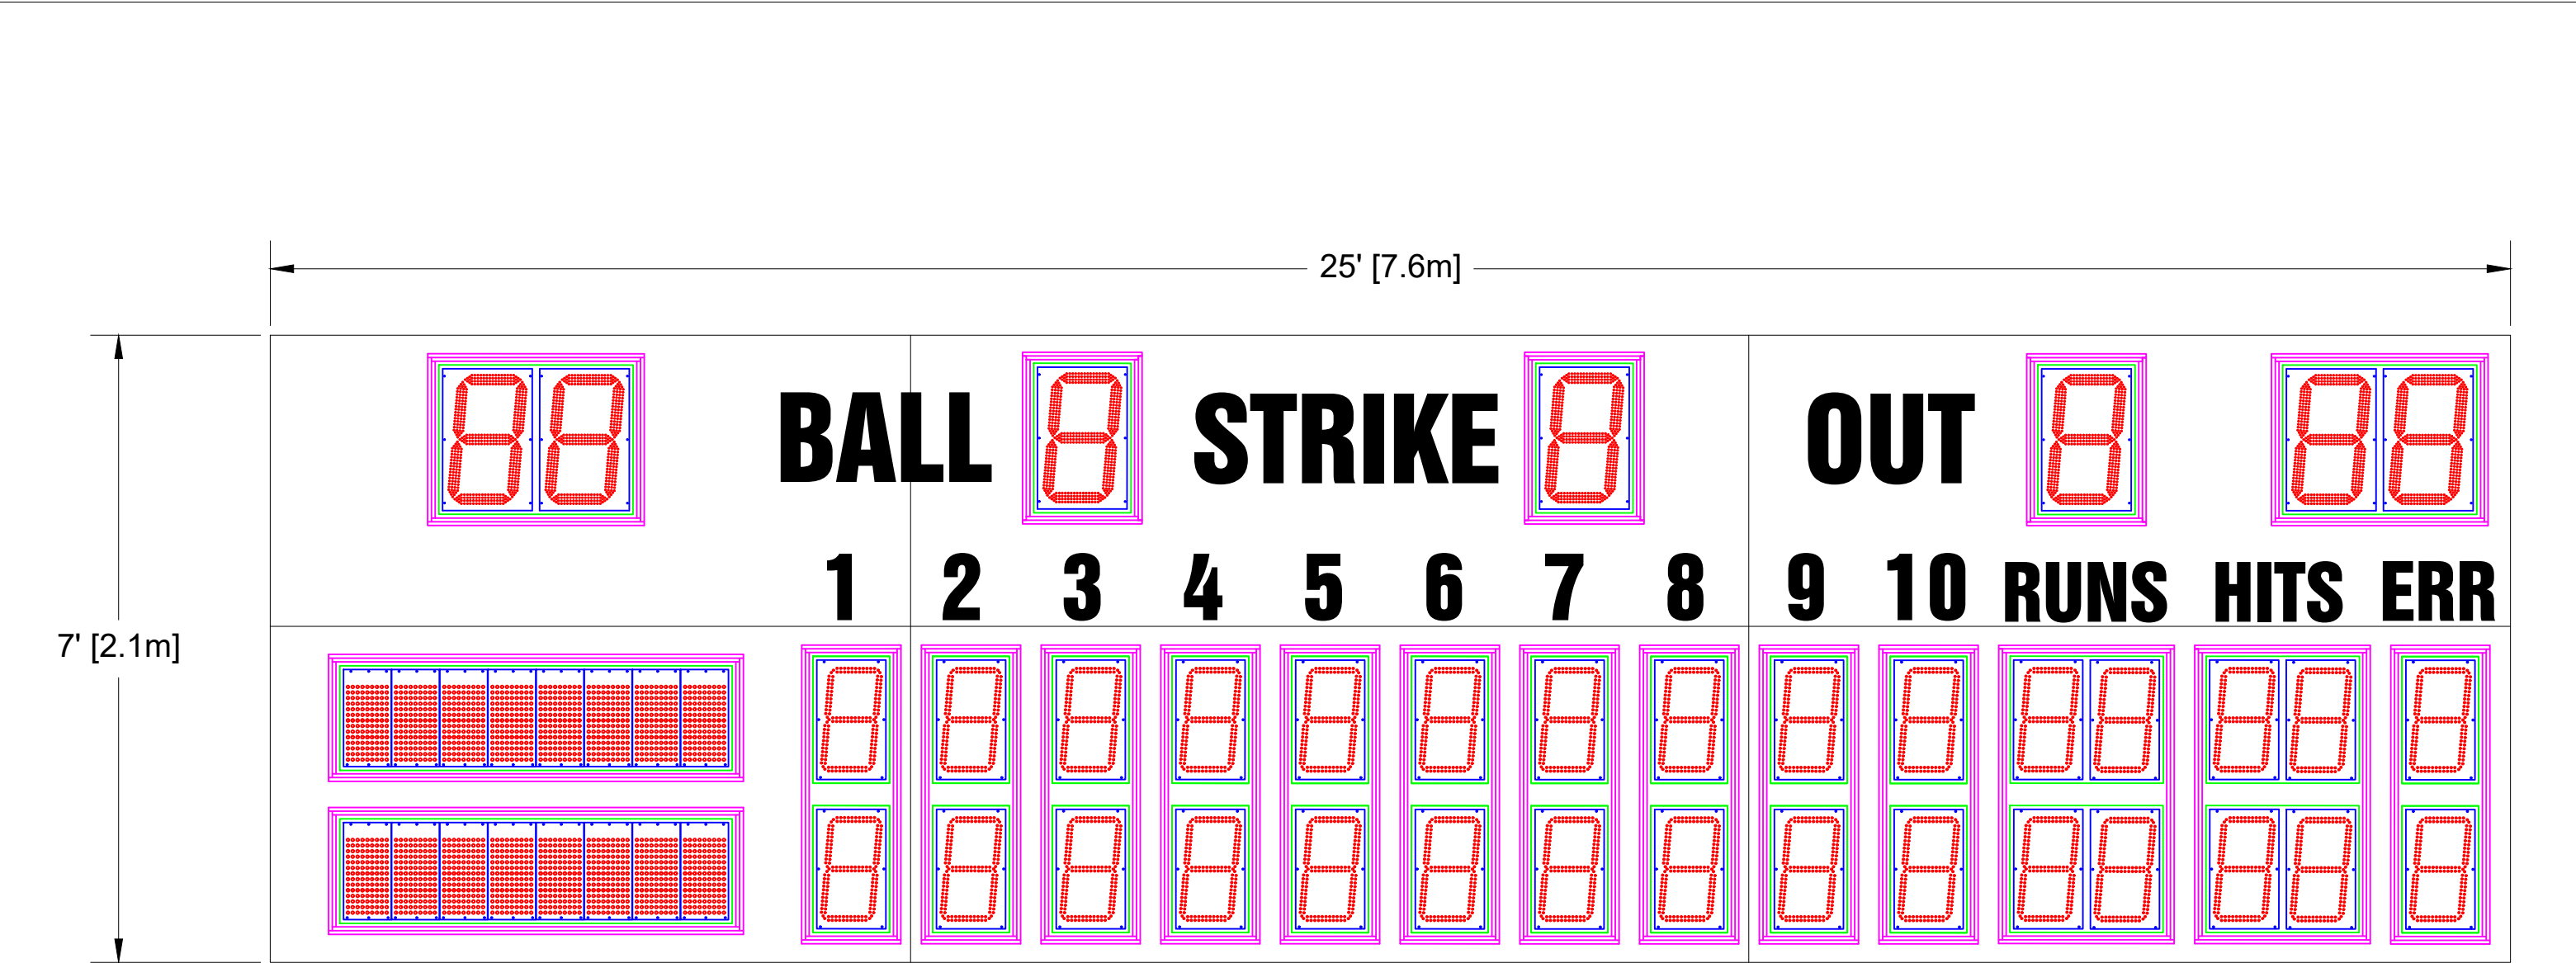

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.



Incoming Mains Power and Data Location: Behind the 7th Inning Digit.


17" LED Digits for TIMER, BALL, STRIKE, OUT, LAST PLAY
14" LED Digits for INNINGS, RUNS, HITS, ERR
10" Electronic Team Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT
9" White Vinyl Lettering for INNINGS
8" White Vinyl Lettering for RUNS, HITS, ERR

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE		
A	INITIAL DESIGN	OES	3/27/2021		
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		<div></div> <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>			
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.					
TOLERANCE INFORMATION Dimensions are in Inches		DESCRIPTION			
<div>Fractional $\pm 1/16"$ Two Place Decimals $\pm 0.02"$ Three Place Decimals $\pm 0.005"$ Four Place Decimals $\pm 0.0005"$ Angular $\pm 30^\circ$</div> <div></div>		OES ELECTRONIC SCOREBOARDS M7125AUxC-TM			
		SIZE	FILENAME M7125AUxE-TM	INIT DRAWING DATE 3/27/21	REV A
		B	USAGE USE FOR REVIEW		
SCALE		NTS	DRAWN BY MLI	PAGE	1 OF 1

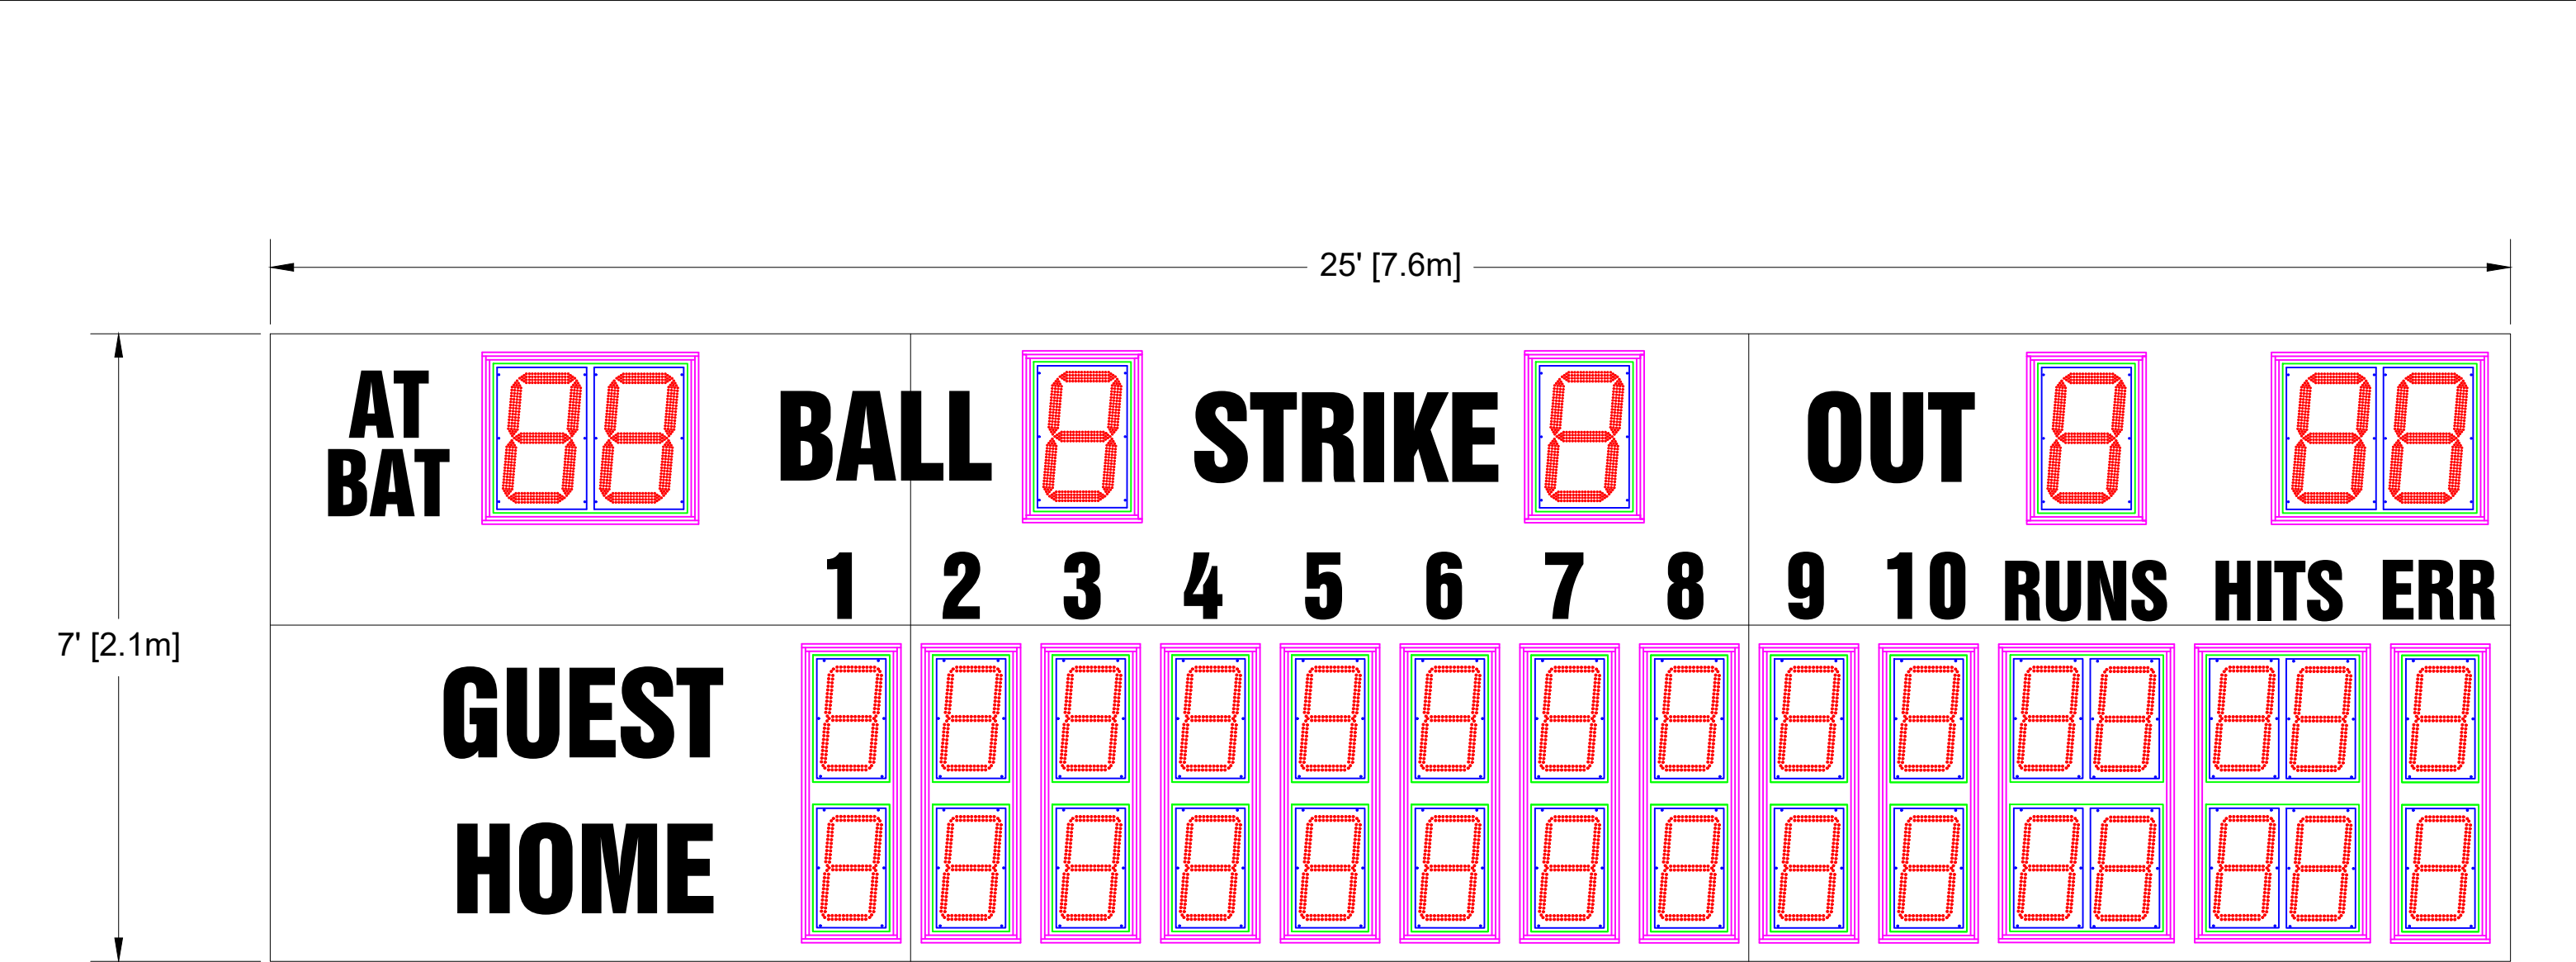

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.


17" LED Digits for AT BAT, BALL, STRIKE, OUT, LAST PLAY
14" LED Digits for INNINGS, RUNS, HITS, ERR

12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME
9" White Vinyl Lettering for INNINGS, AT BAT
8" White Vinyl Lettering for RUNS, HITS, ERR

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/26/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M7125AxCV-AB		SIZE B	REV A
FILENAME M7125AUXV-AB		INIT DRAWING DATE 3/26/21	USE FOR REVIEW
SCALE NTS		DRAWN BY MLI	PAGE 1 OF 1

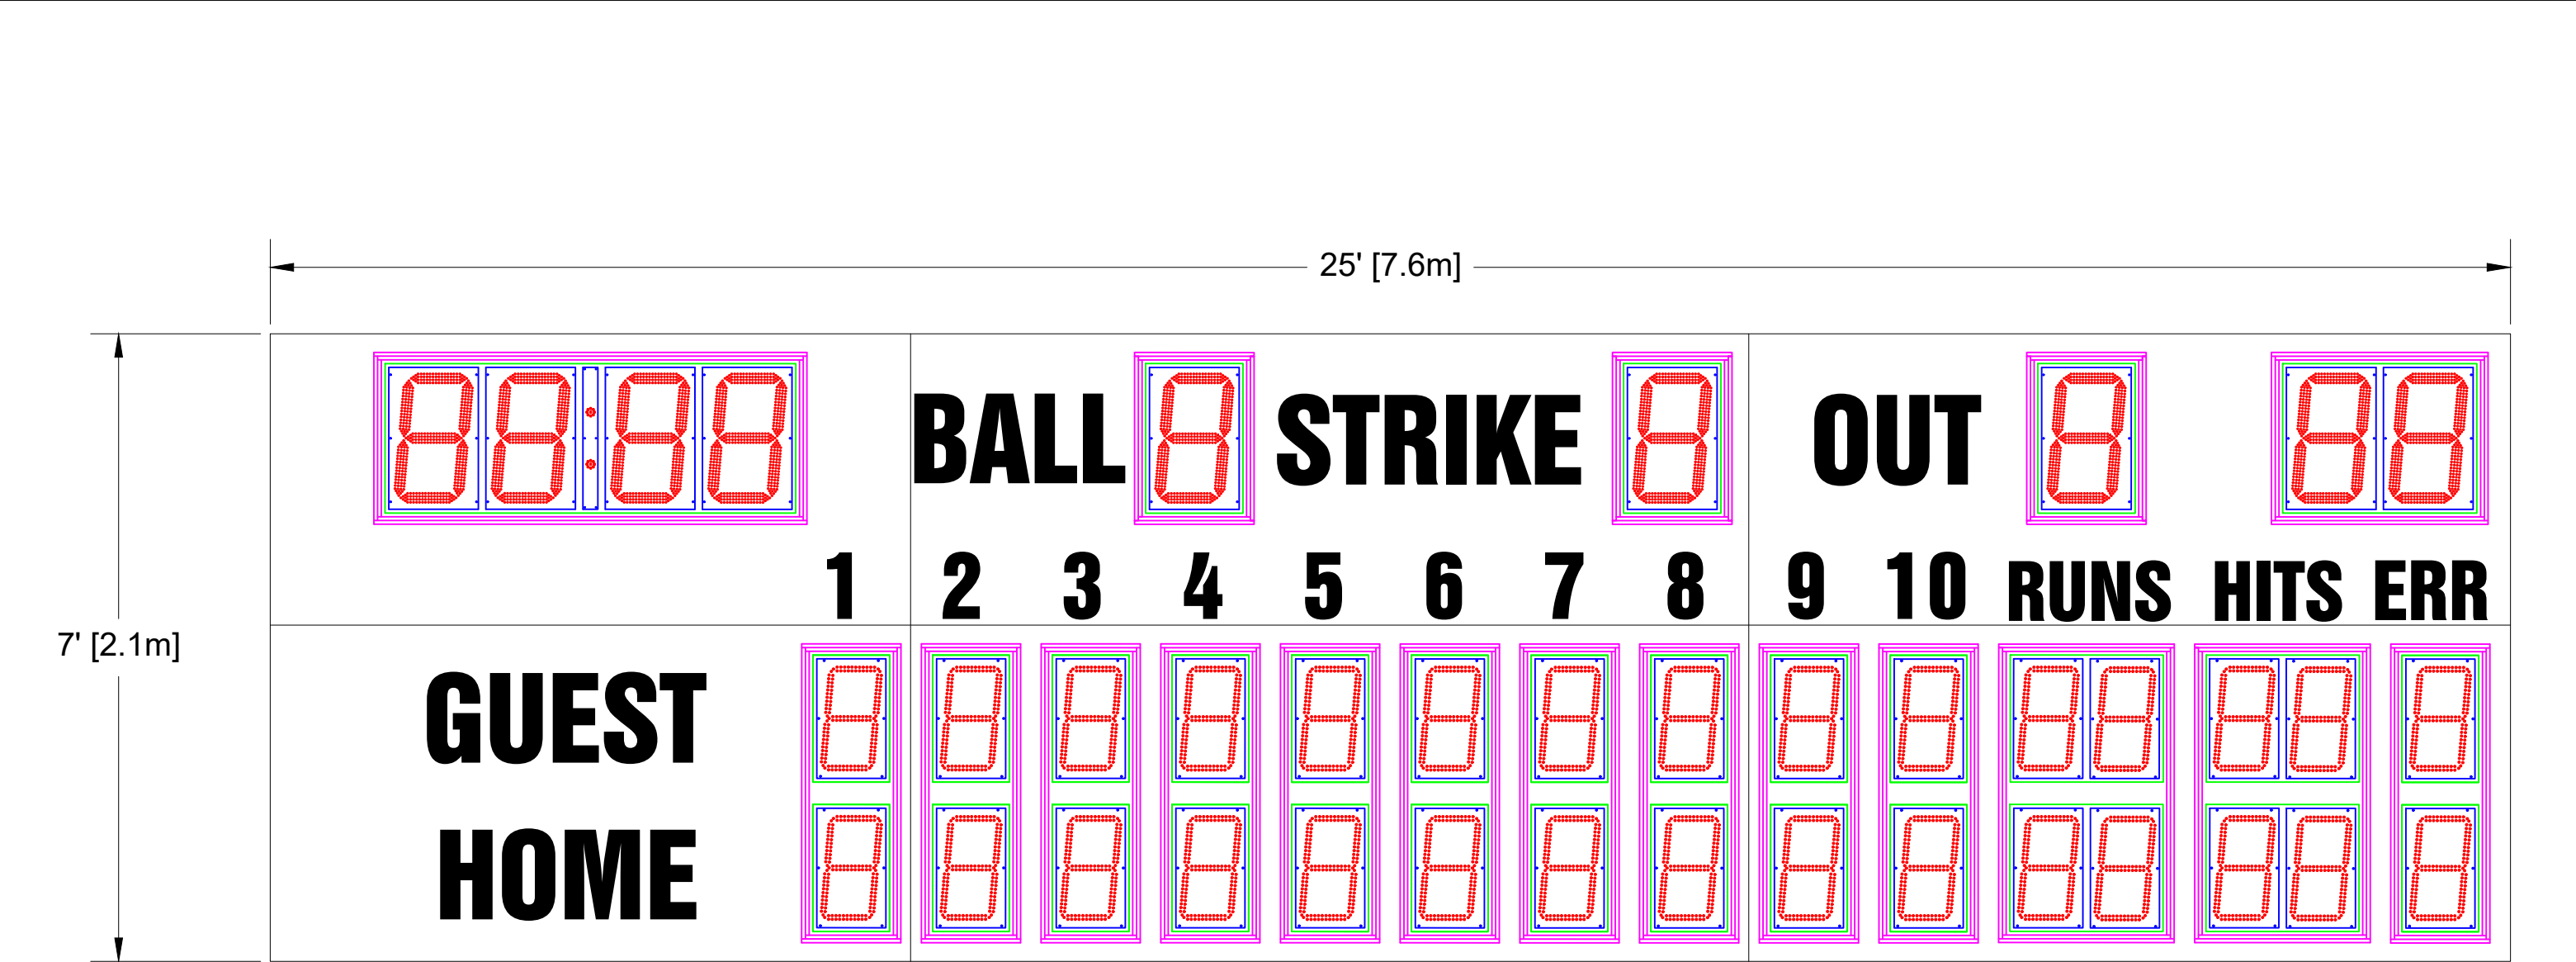

Scoreboard Specifications
Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.

- 17" LED Digits for TIME, BALL, STRIKE, OUT, LAST PLAY
- 14" LED Digits for INNINGS, RUNS, HITS, ERR
- 12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME
- 8" White Vinyl Lettering for RUNS, HITS, ERR

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/26/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.


TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M7125AxCV-CL			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7125AUXV-CL	3/26/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	MLI
PAGE		1 OF 1	

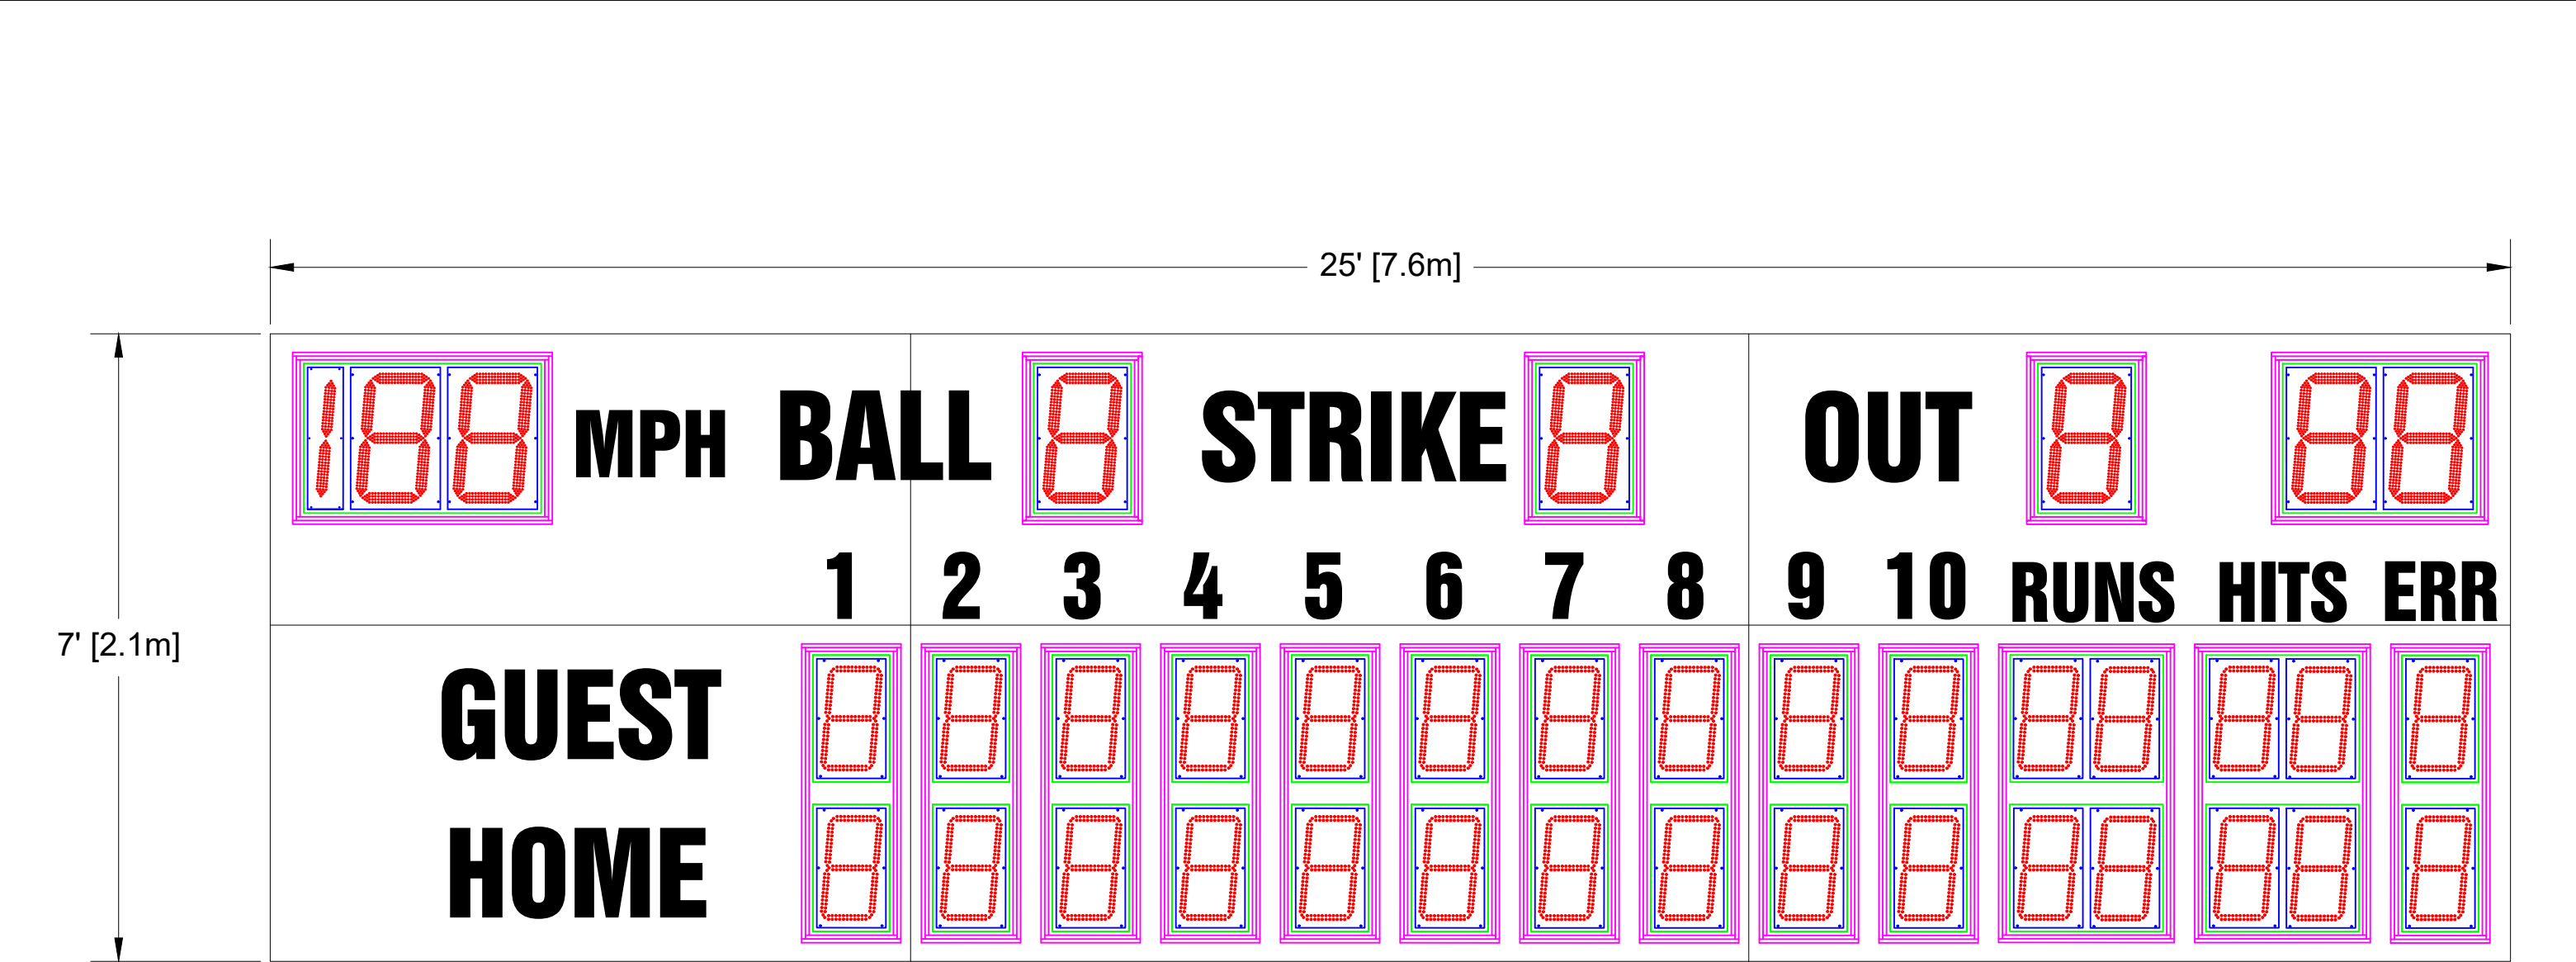

Scoreboard Specifications


Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.

- 17" LED Digits for MPH, BALL, STRIKE, OUT, LAST PLAY
- 14" LED Digits for INNINGS, RUNS, HITS, ERR
- 12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME
- 9" White Vinyl Lettering for INNINGS, MPH
- 8" White Vinyl Lettering for RUNS, HITS, ERR

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/18/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M7125AxCV-MP		SIZE B	REV A
FILENAME M7125AUXV-MP		INIT DRAWING DATE 3/18/21	
USAGE USE FOR REVIEW			
SCALE NTS	DRAWN BY MLI	PAGE 1 OF 1	

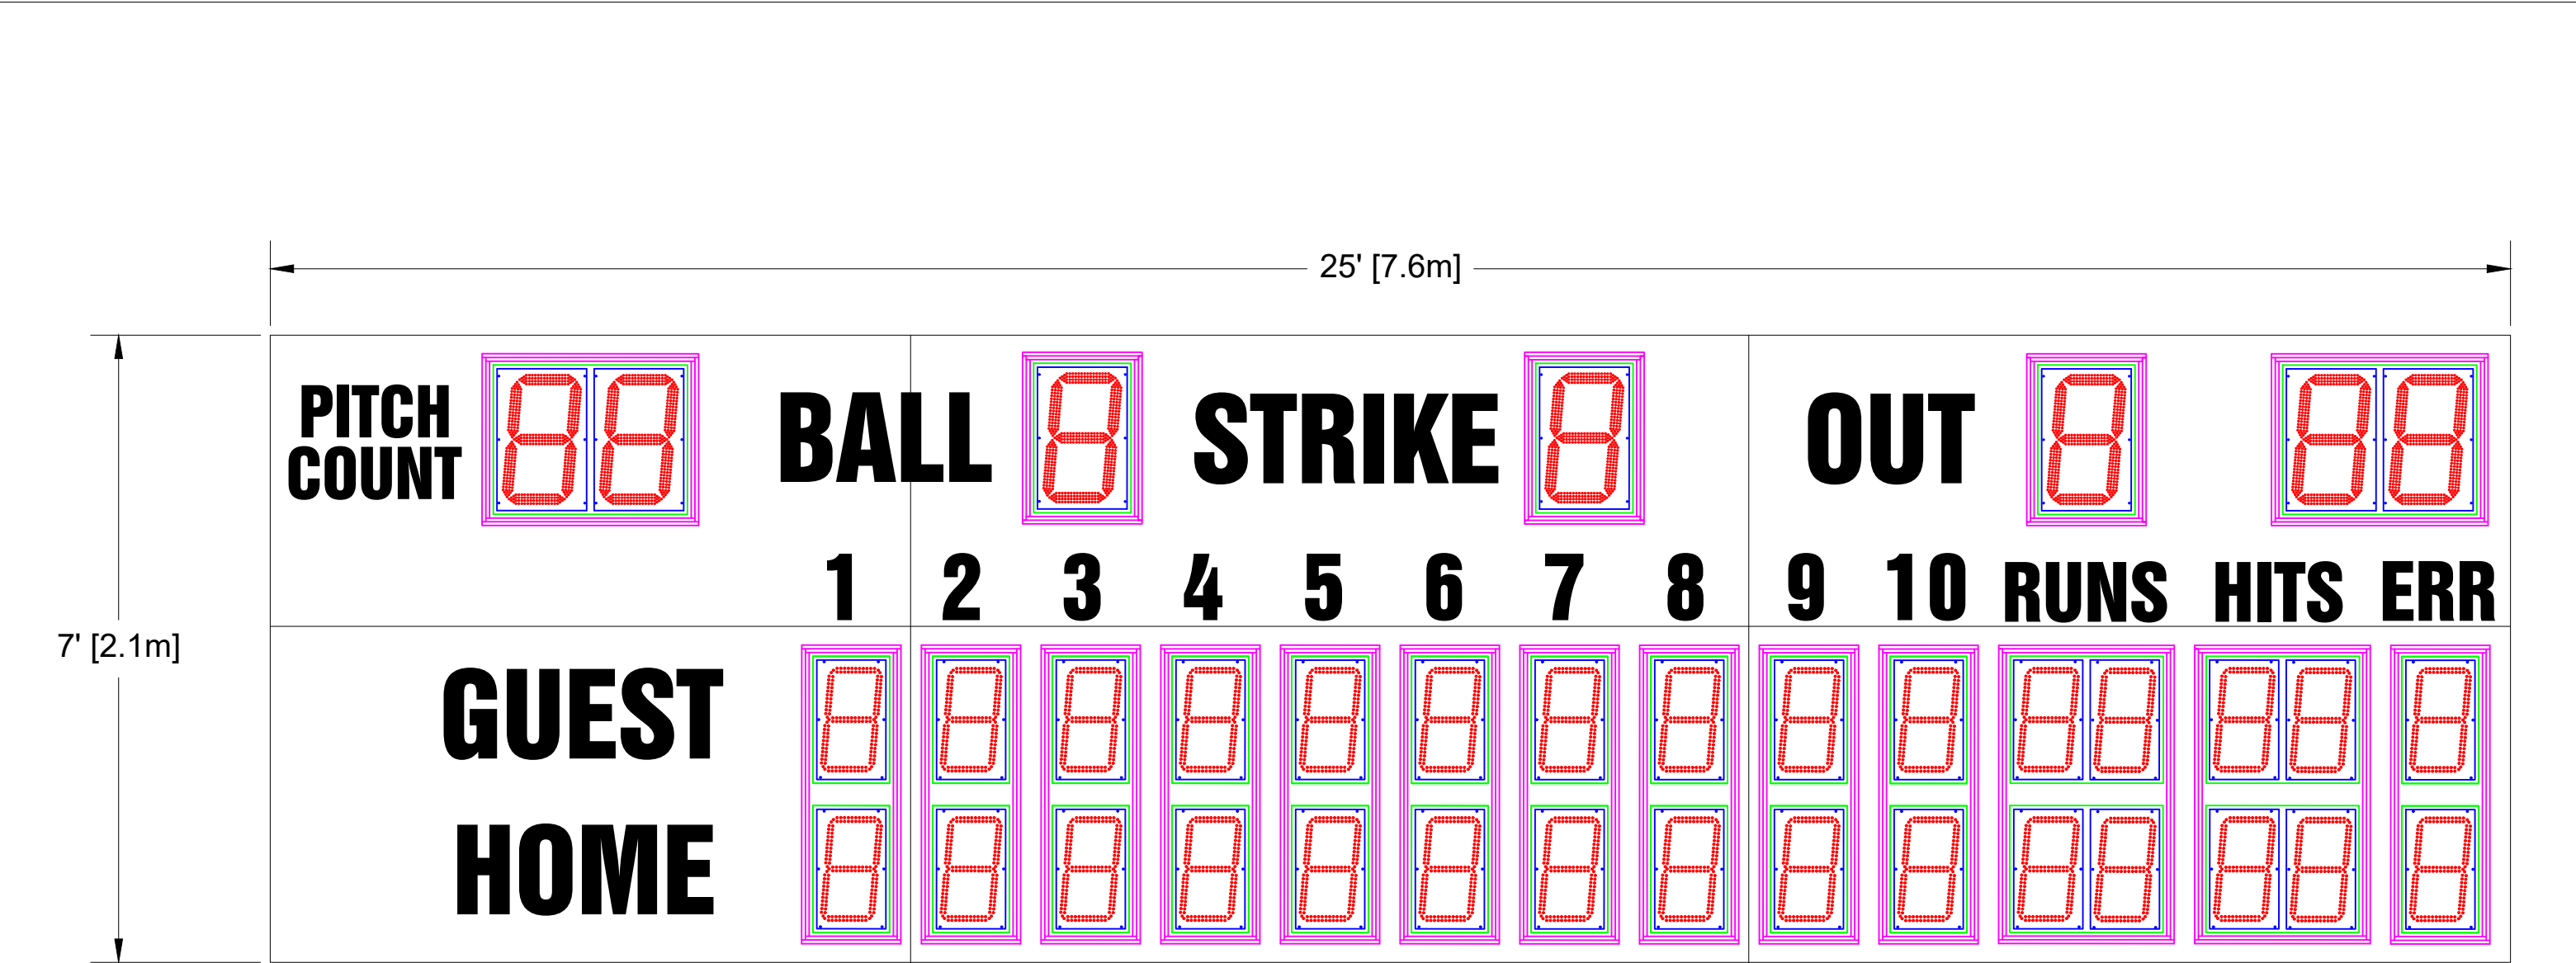

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.


17" LED Digits for PITCH COUNT, BALL, STRIKE, OUT, LAST PLAY
14" LED Digits for INNINGS, RUNS, HITS, ERR

12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME
9" White Vinyl Lettering for INNINGS
8" White Vinyl Lettering for RUNS, HITS, ERR
7" White Vinyl Lettering for PITCH COUNT

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/26/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		DESCRIPTION OES ELECTRONIC SCOREBOARDS M7125AxCV-PC	
SIZE B		FILENAME M7125AUXV-PC	INIT DRAWING DATE 3/26/21
		USE FOR REVIEW	
SCALE NTS		DRAWN BY MLI	REV A
		PAGE 1 OF 1	

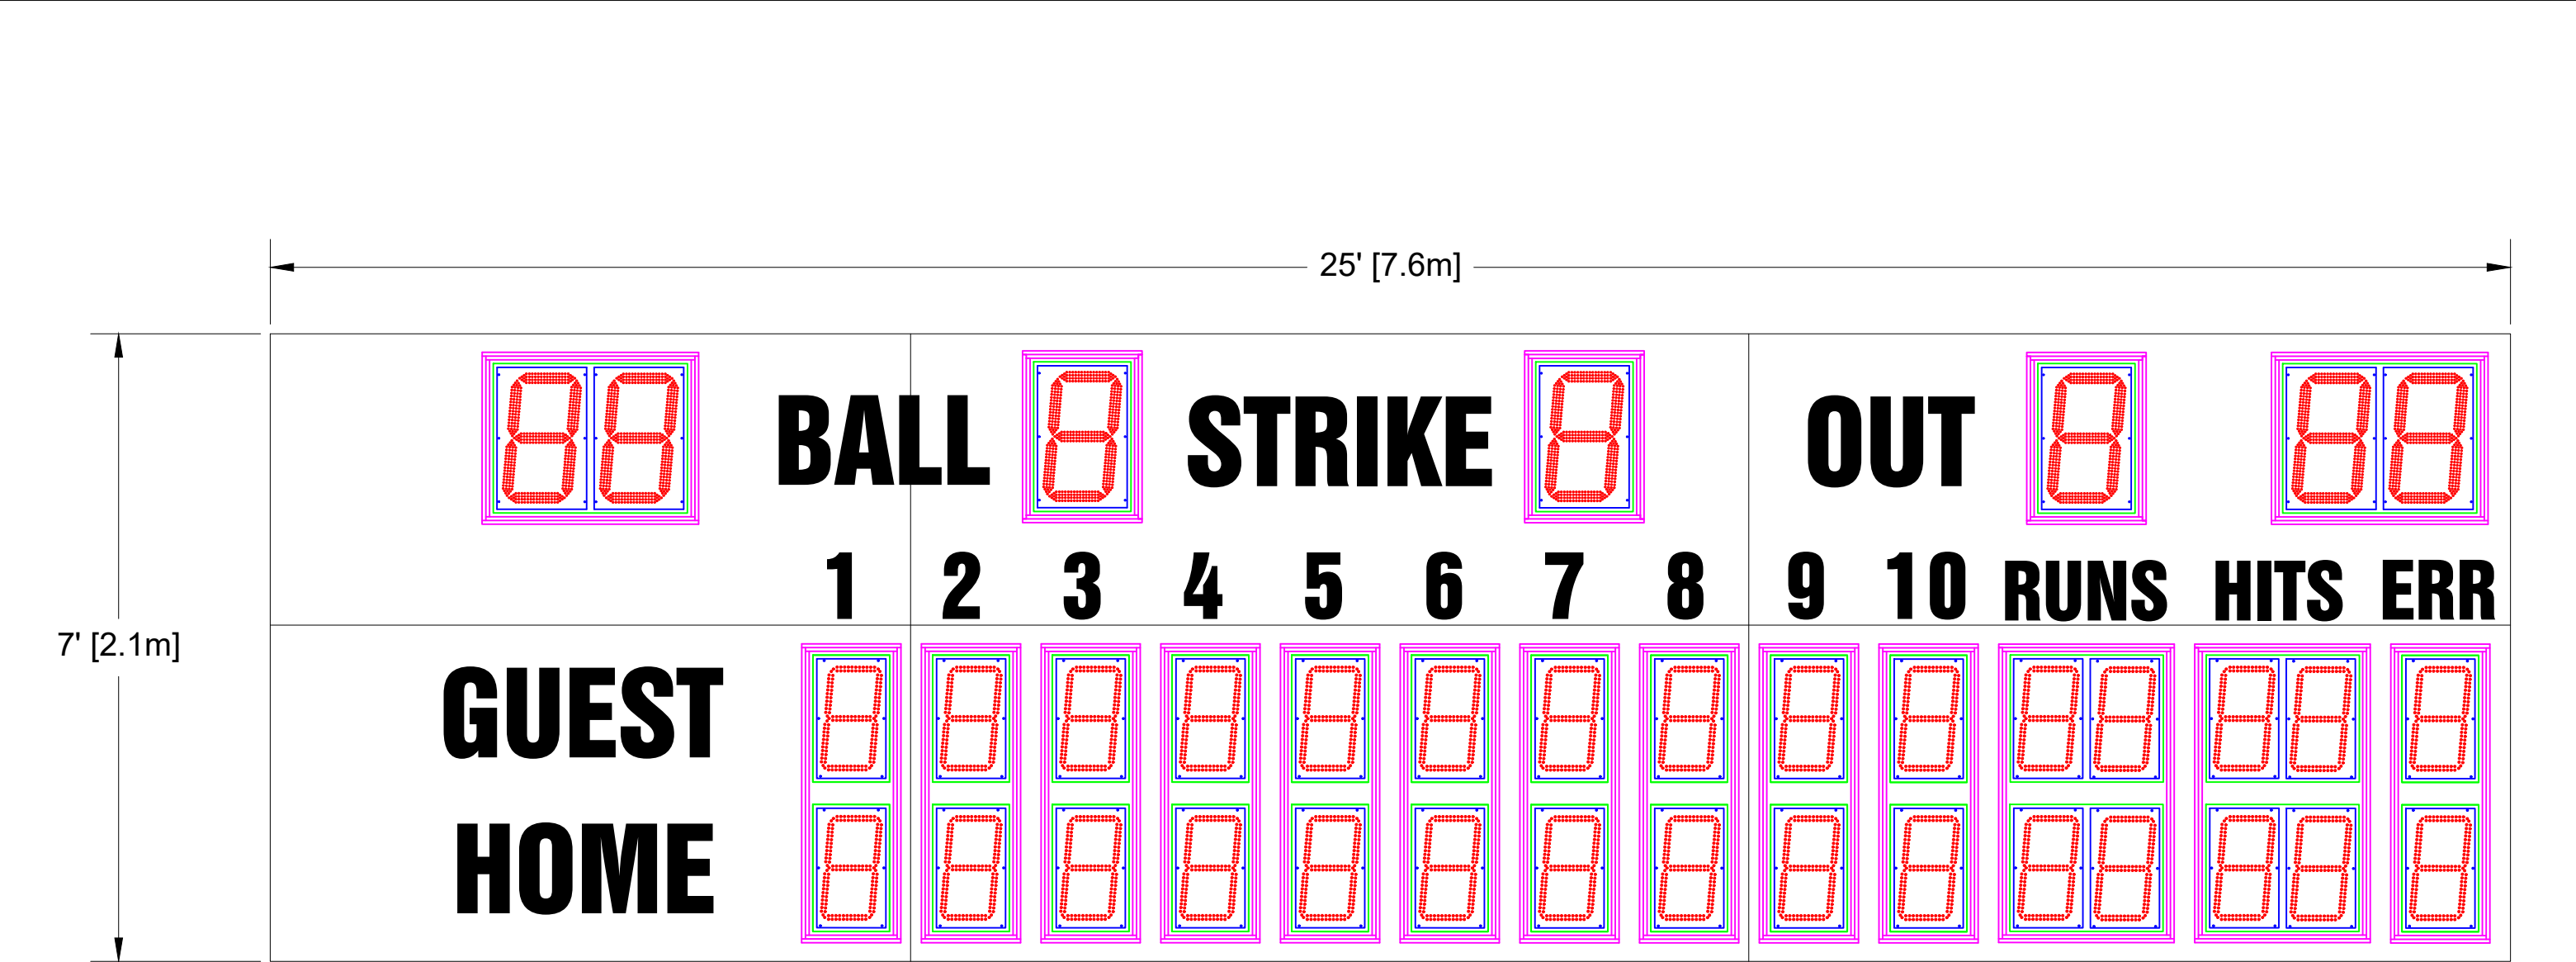

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.



17" LED Digits for TIMER, BALL, STRIKE, OUT, LAST PLAY
14" LED Digits for INNINGS, RUNS, HITS, ERR

12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME
9" White Vinyl Lettering for INNINGS
8" White Vinyl Lettering for RUNS, HITS, ERR

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/28/2021

			4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		DESCRIPTION		
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		OES ELECTRONIC SCOREBOARDS M7125AxCV-TM		
TOLERANCE INFORMATION Dimensions are in Inches		SIZE	FILENAME M7125AUXV-TM	INIT DRAWING DATE 3/28/21
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		B	USAGE	
			USE FOR REVIEW	
		SCALE	NTS	DRAWN BY MLI
		PAGE 1 OF 1		