

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.


- 17" LED Digits for BALL, STRIKE, OUT, LAST PLAY, AT BAT
- 14" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT
- 10" Electronic Team Names at 8 CH

- 12" White Vinyl Lettering for BALL, STRIKE, OUT
- 9" White Vinyl Lettering for INNINGS, AT BAT
- 8" White Vinyl Lettering for RUNS, HITS, PC

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/6/2021

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>	<div><div>OES SCOREBOARDS</div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div> <div>DESCRIPTION OES ELECTRONIC SCOREBOARDS M7125BxCE-AB</div> <div><table><tr><td>SIZE</td><td>FILENAME M7125BUXE-AB</td><td>INIT DRAWING DATE 5/6/21</td><td>REV A</td></tr><tr><td>B</td><td colspan="2">USAGE USE FOR REVIEW</td><td></td></tr></table></div> <div><table><tr><td>SCALE</td><td>NTS</td><td>DRAWN BY MLI</td><td>PAGE 1 OF 1</td></tr></table></div>	SIZE	FILENAME M7125BUXE-AB	INIT DRAWING DATE 5/6/21	REV A	B	USAGE USE FOR REVIEW			SCALE	NTS	DRAWN BY MLI	PAGE 1 OF 1
SIZE	FILENAME M7125BUXE-AB	INIT DRAWING DATE 5/6/21	REV A												
B	USAGE USE FOR REVIEW														
SCALE	NTS	DRAWN BY MLI	PAGE 1 OF 1												

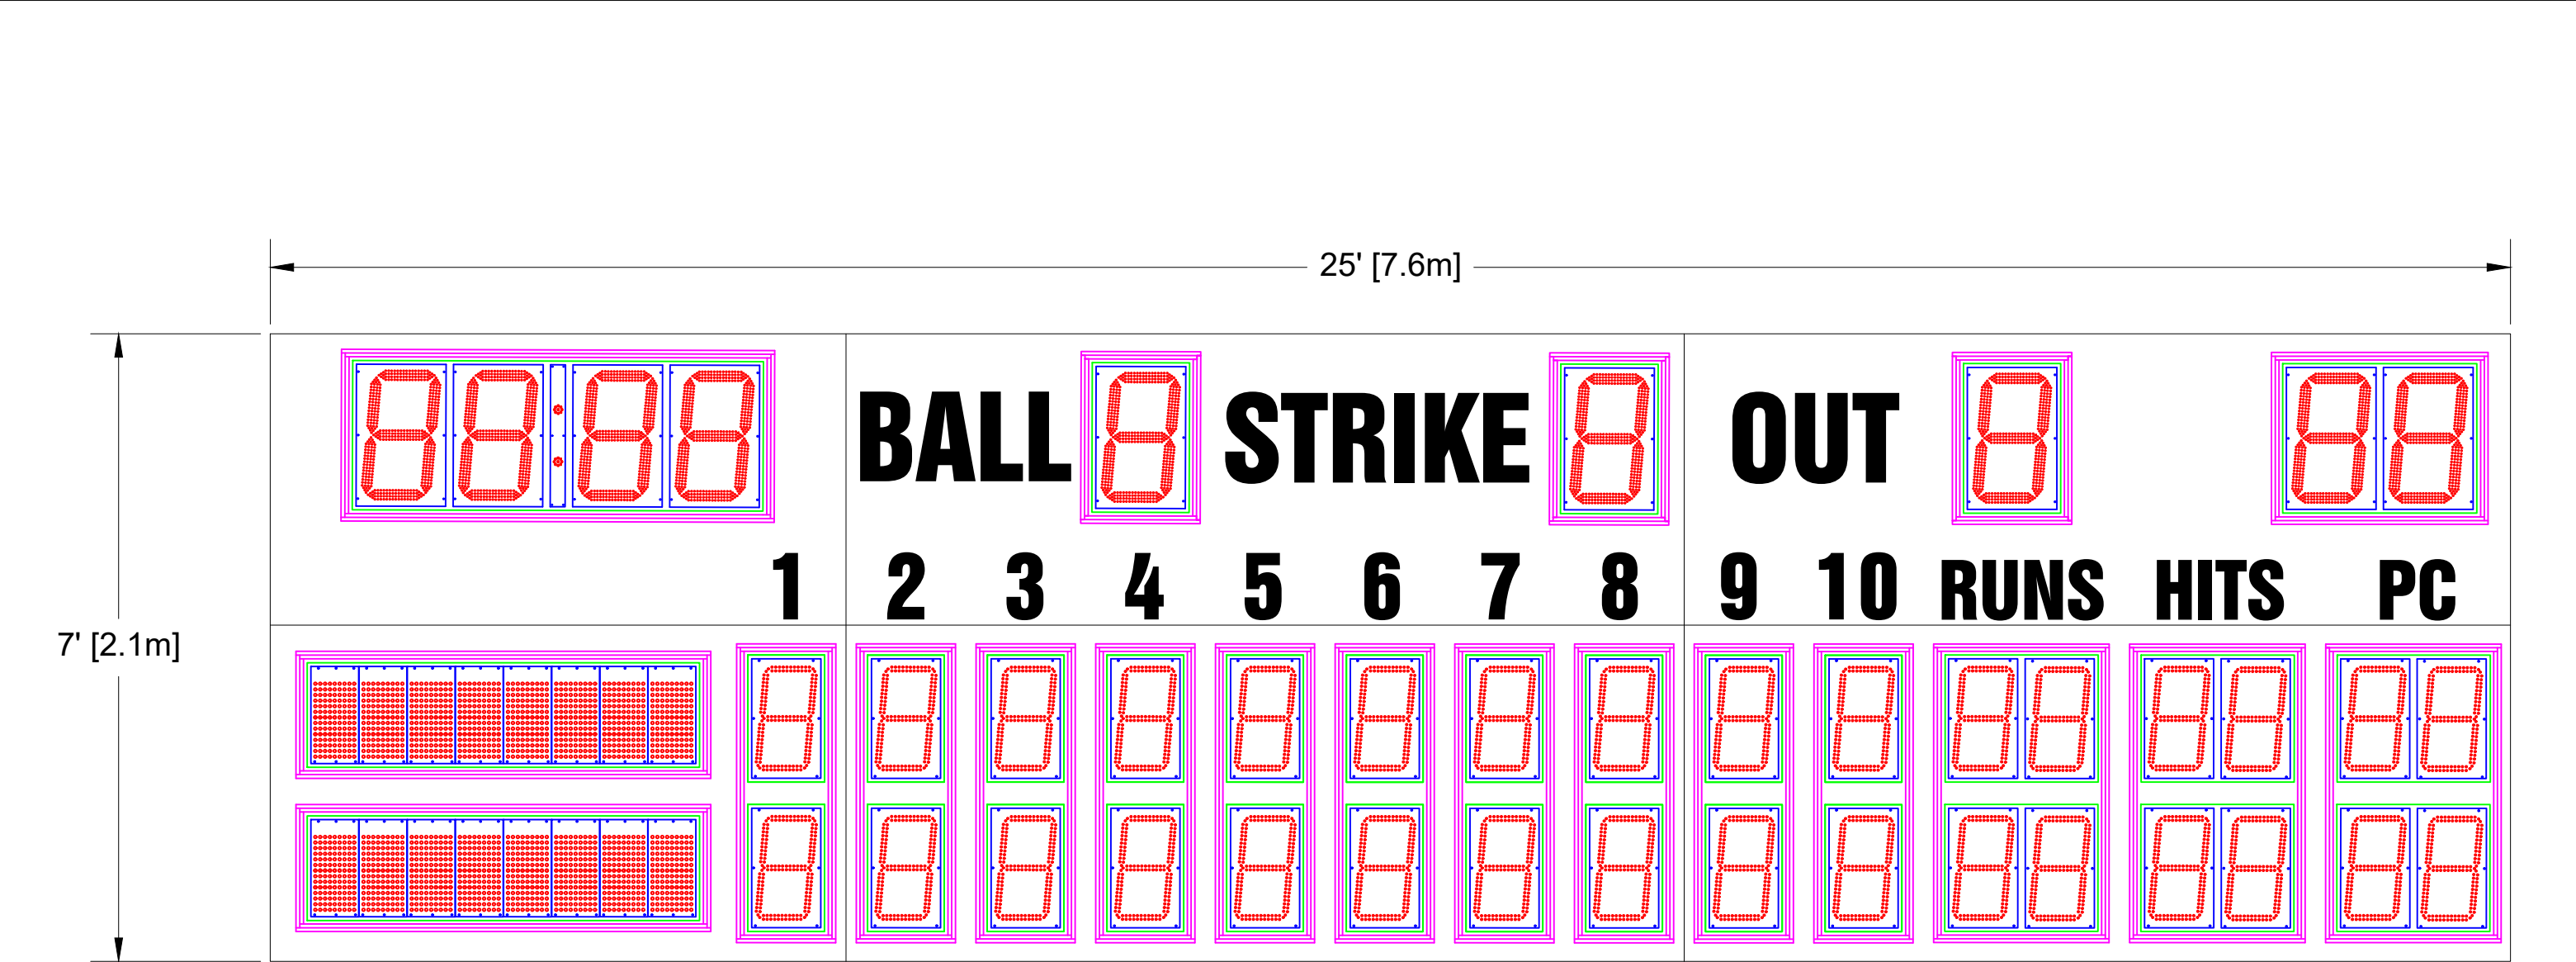

Scoreboard Specifications


Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the 7th Inning Digit.

17" LED Digits for TOD, BALL, STRIKE, OUT, LAST PLAY
14" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT
10" Electronic Team Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT
9" White Vinyl Lettering for INNINGS
8" White Vinyl Lettering for RUNS, HITS, PC

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION	AUTHOR		DATE
A		INITIAL DESIGN	OES		12/24/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:					
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.					
TOLERANCE INFORMATION Dimensions are in Inches					
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°					
THIRD ANGLE PROJECTIONS					
					

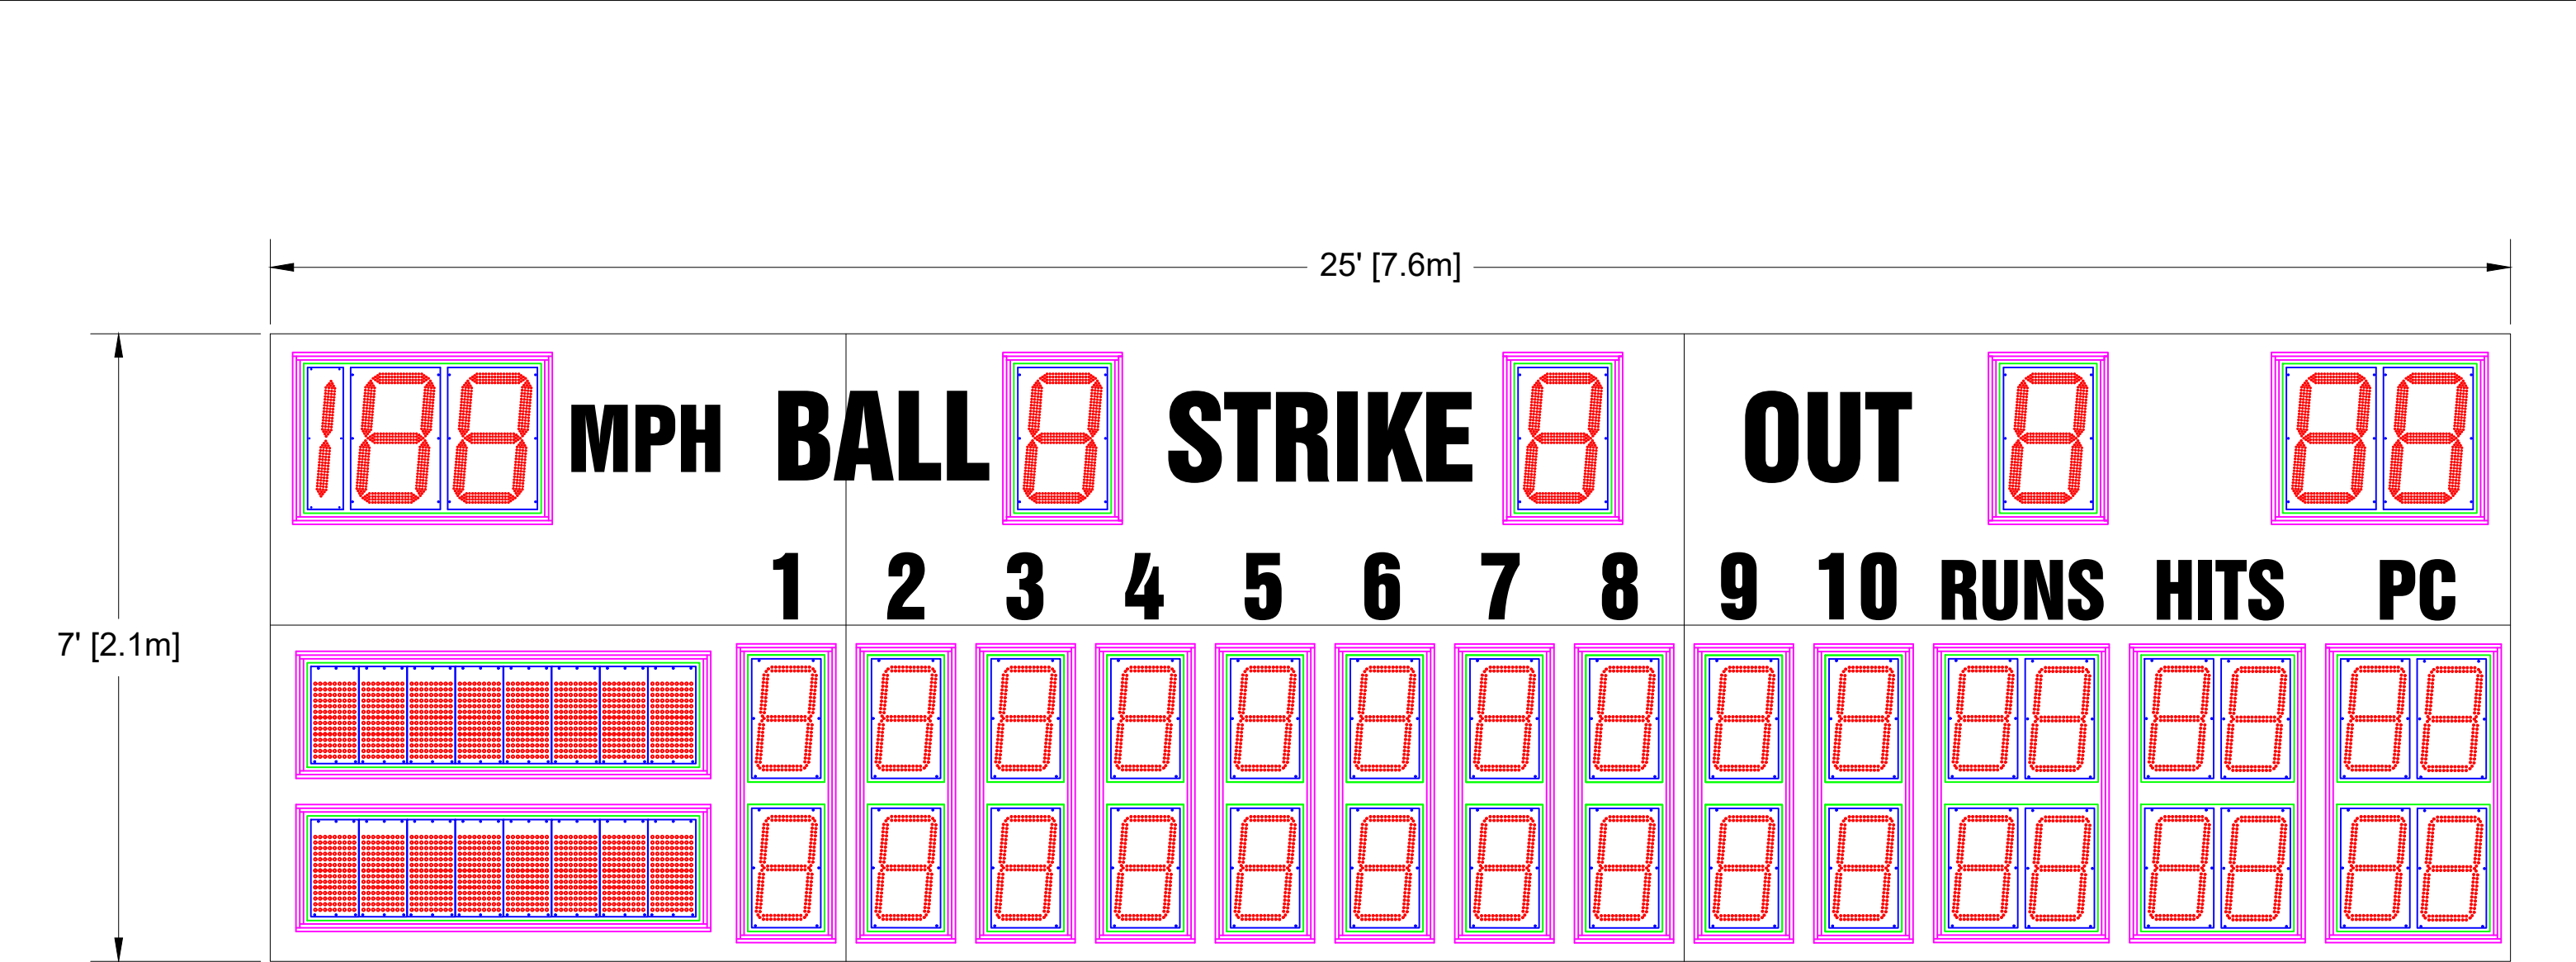

Scoreboard Specifications
Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.


17" LED Digits for MPH, BALL, STRIKE, OUT, LAST PLAY
14" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT
10" Electronic Team Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT
9" White Vinyl Lettering for INNINGS, MPH
8" White Vinyl Lettering for RUNS, HITS, PC

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/6/2021

		<div><div></div><div>OES</div><div>SCOREBOARDS</div></div> <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M7125BxCE-MP</div>	
SIZE A	FILENAME M7125BUXE-MP USAGE USE FOR REVIEW	INIT DRAWING DATE 5/6/21	REV A
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	

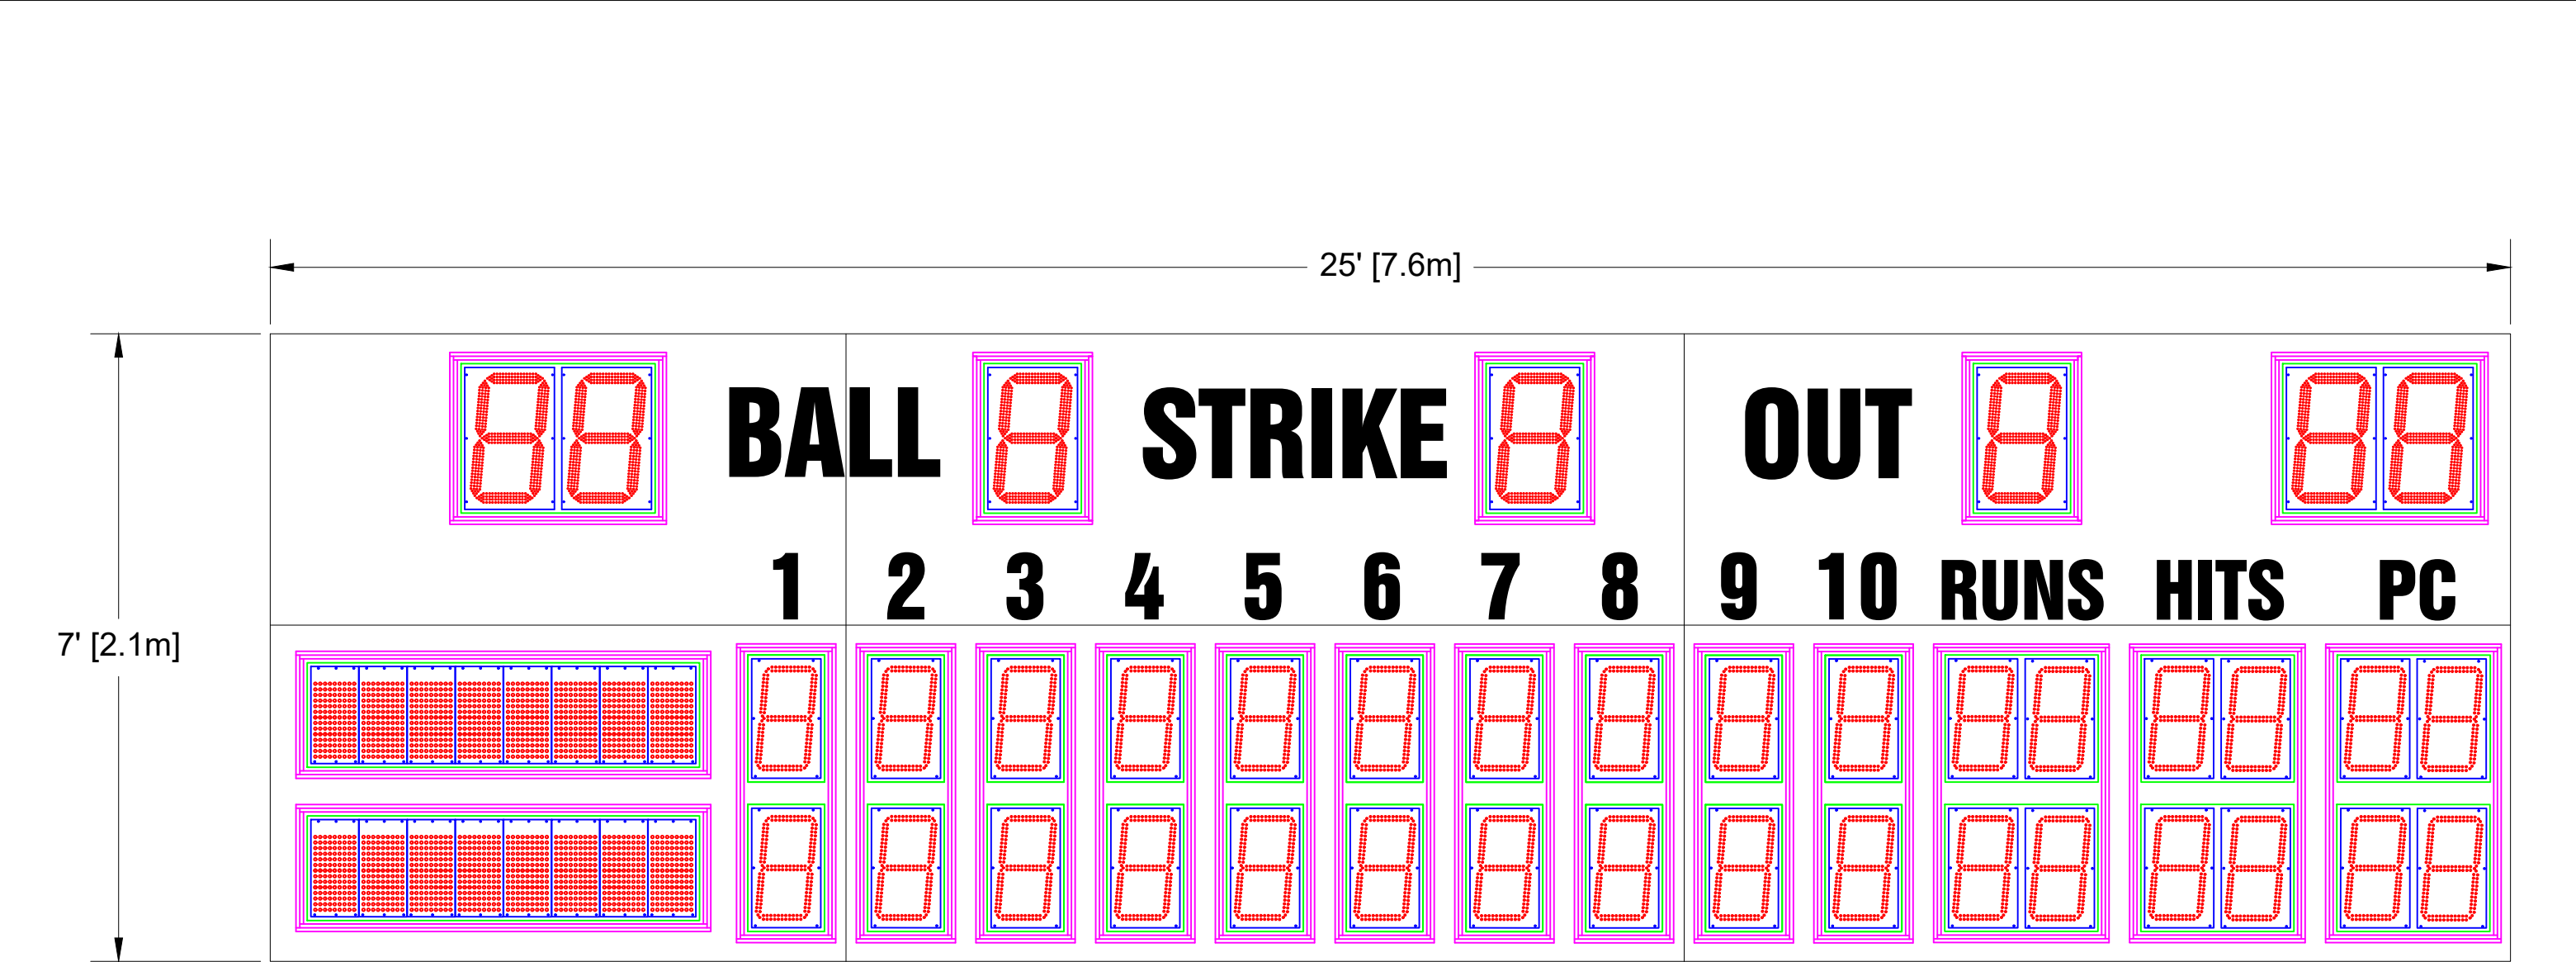

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.


17" LED Digits for TIMER, BALL, STRIKE, OUT, LAST PLAY
14" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT
10" Electronic Team Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT
9" White Vinyl Lettering for INNINGS
8" White Vinyl Lettering for RUNS, HITS, PC

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/6/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		OES SCOREBOARDS 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
SIZE A	FILENAME M7125BUXE-TM USAGE USE FOR REVIEW	INIT DRAWING DATE 5/6/21	REV A
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	

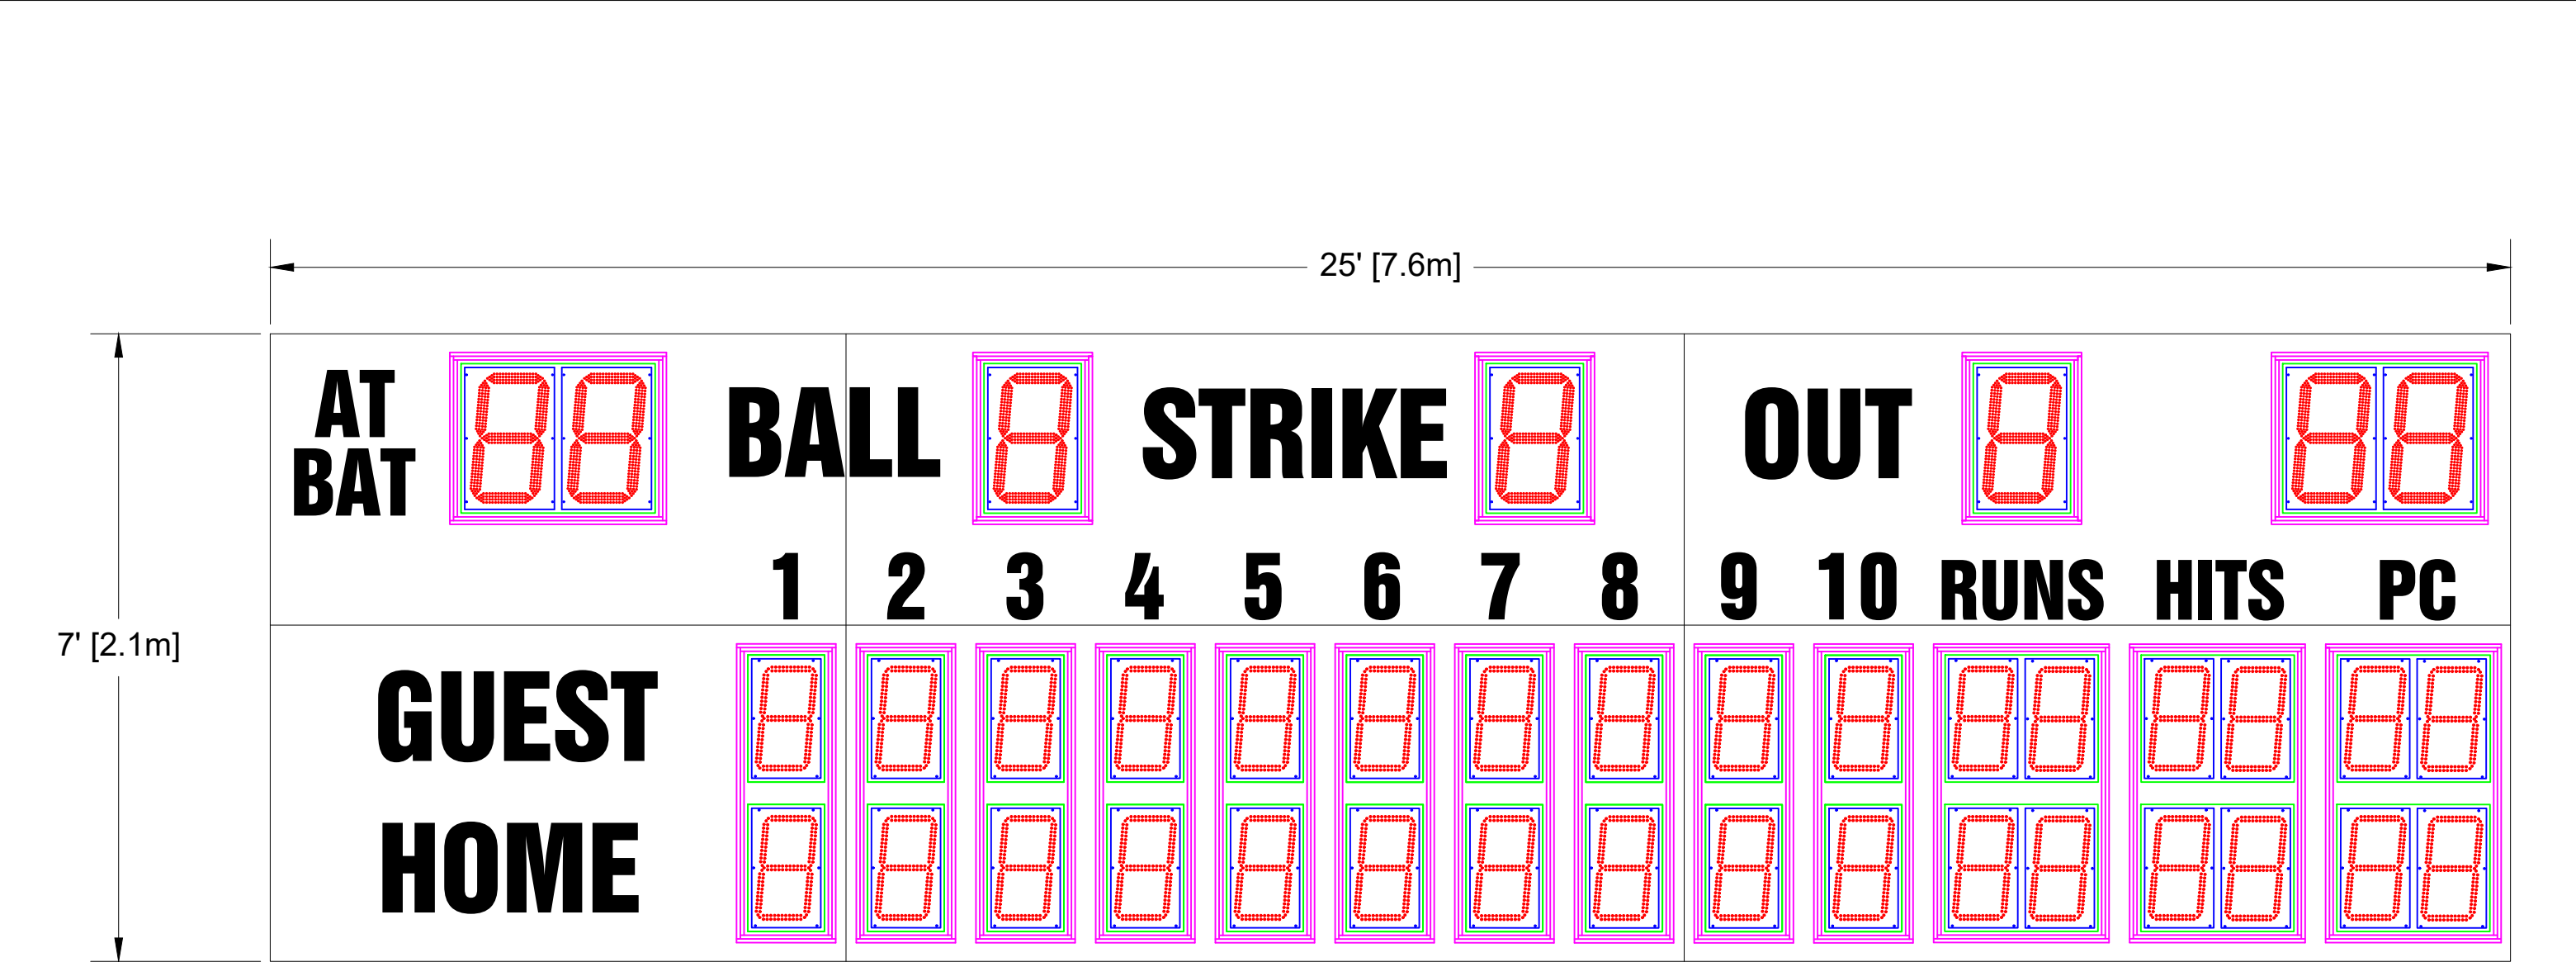

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.



17" LED Digits for AT BAT, BALL, STRIKE, OUT, LAST PLAY
14" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT


12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME
9" White Vinyl Lettering for INNINGS, AT BAT
8" White Vinyl Lettering for RUNS, HITS, PC

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/6/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
DESCRIPTION	OES ELECTRONIC SCOREBOARDS M7125BxCV-AB		
SIZE	FILENAME M7125BUXV-AB	INIT DRAWING DATE 5/6/21	REV A
B	USAGE USE FOR REVIEW		
SCALE	NTS	DRAWN BY MLI	PAGE 1 OF 1

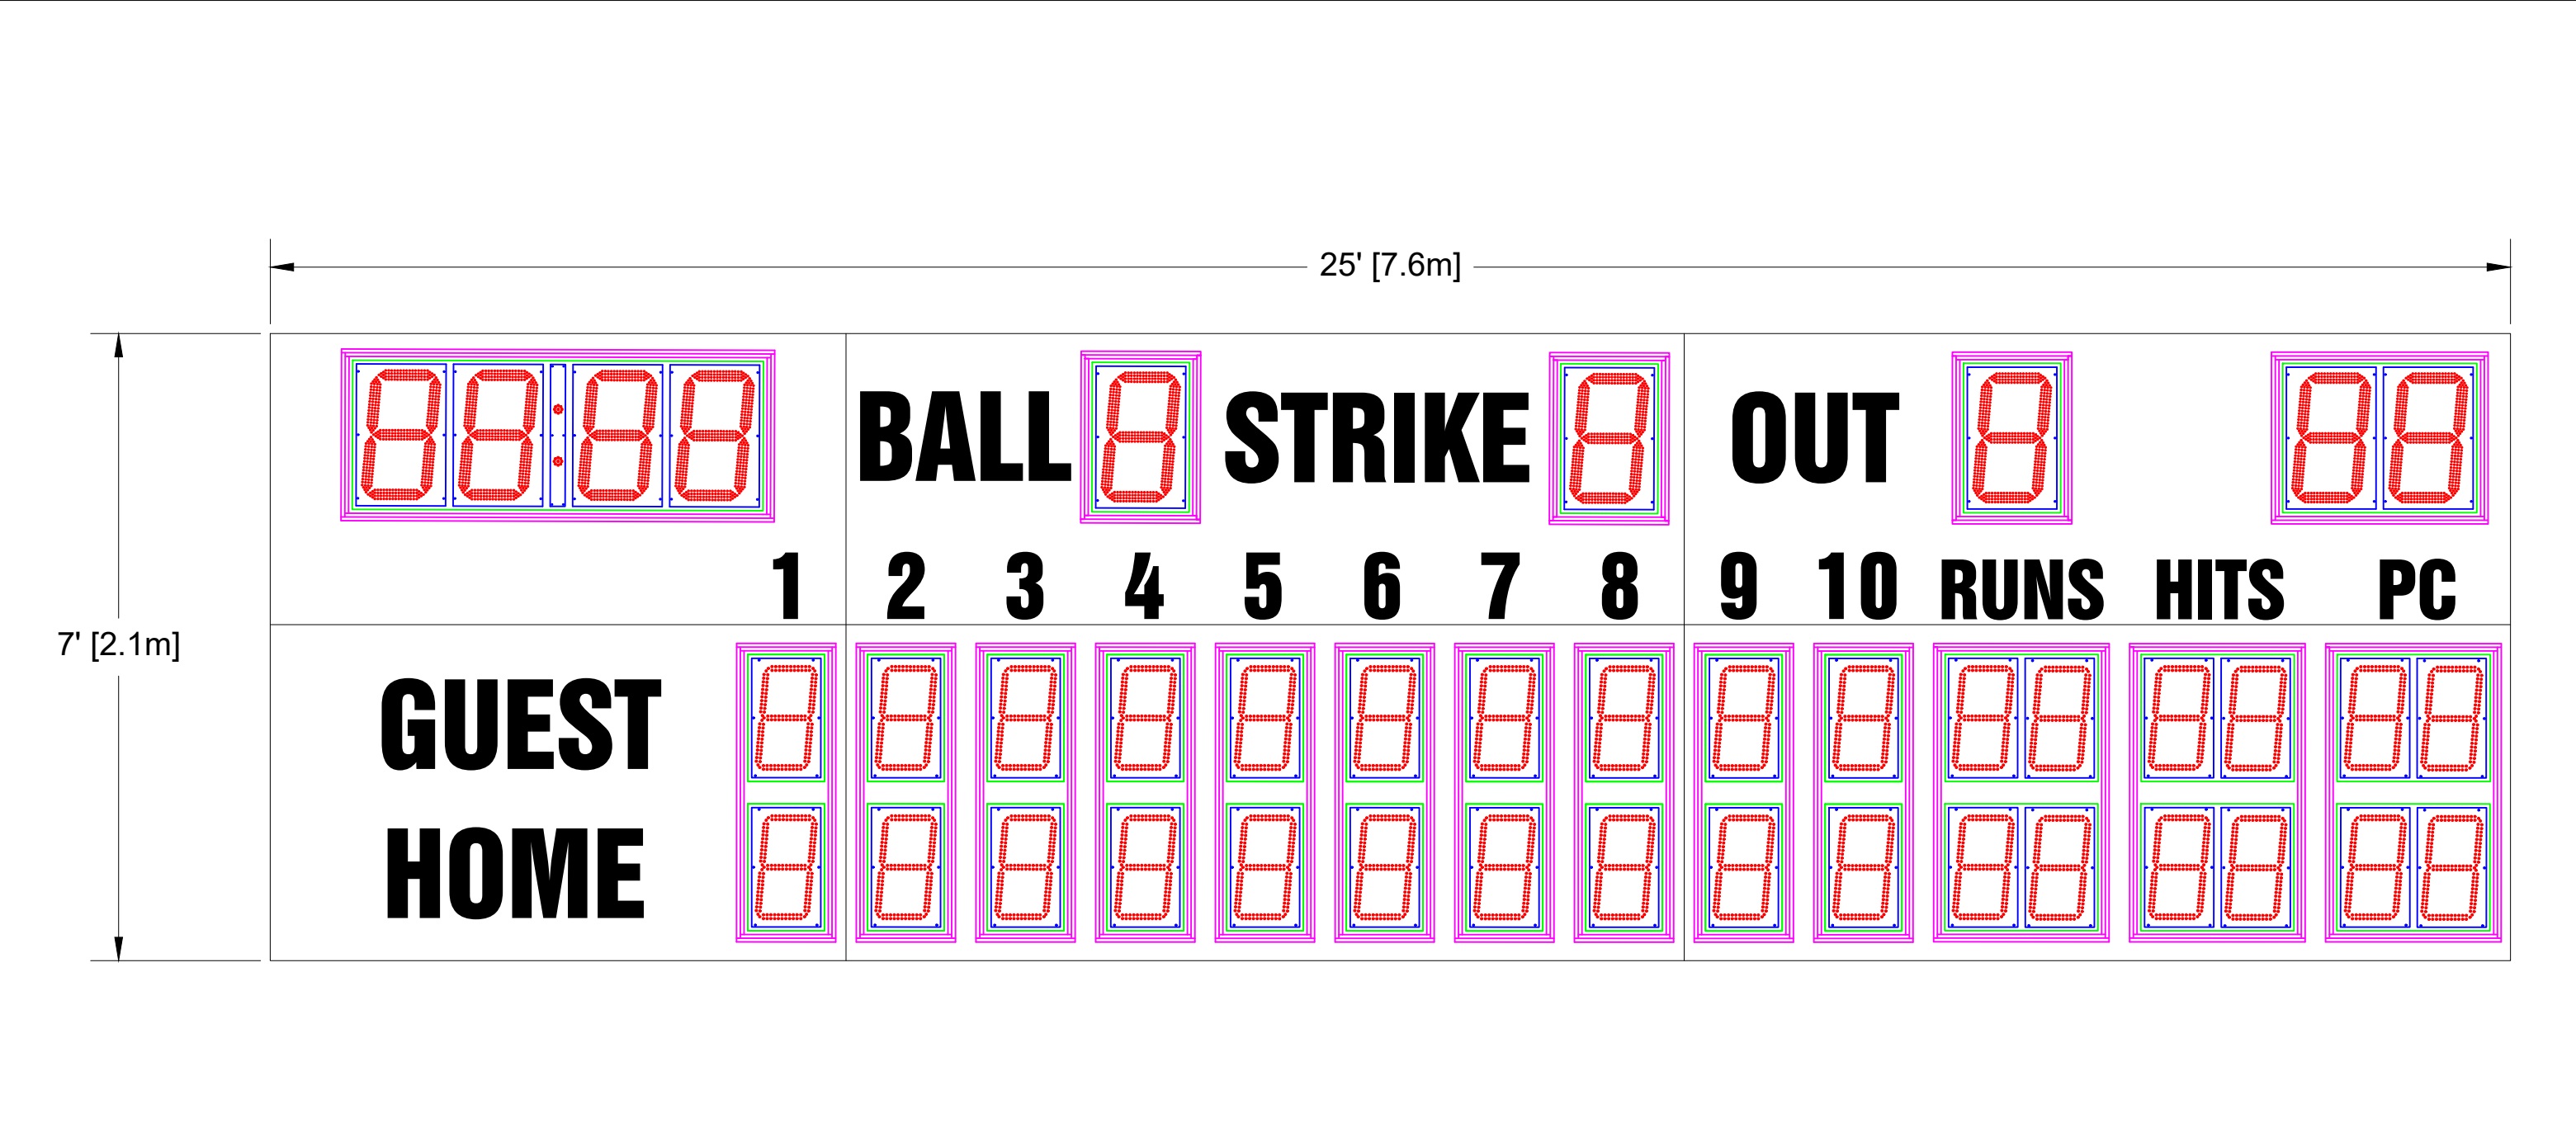

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)

Approximate Weight: 1021 lbs

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.

17" LED Digits for TIME, BALL, STRIKE, OUT, LAST PLAY

14" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT

12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME

9" White Vinyl Lettering for INNINGS

8" White Vinyl Lettering for RUNS, HITS, PC

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/6/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION

Dimensions are in Inches

Fractional ± 1/16"

Two Place Decimals ± 0.02"

Three Place Decimals ± 0.005"

Four Place Decimals ± 0.0005"

Angular ± 30°

THIRD ANGLE PROJECTIONS

DESCRIPTION

OES ELECTRONIC SCOREBOARDS


M7125BxCV-CL

SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7125BUXV-CL	5/6/21	A
USAGE			

USE FOR REVIEW

SCALE	NTS	DRAWN BY	MLI	PAGE	1 OF 1
-------	-----	----------	-----	------	--------

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

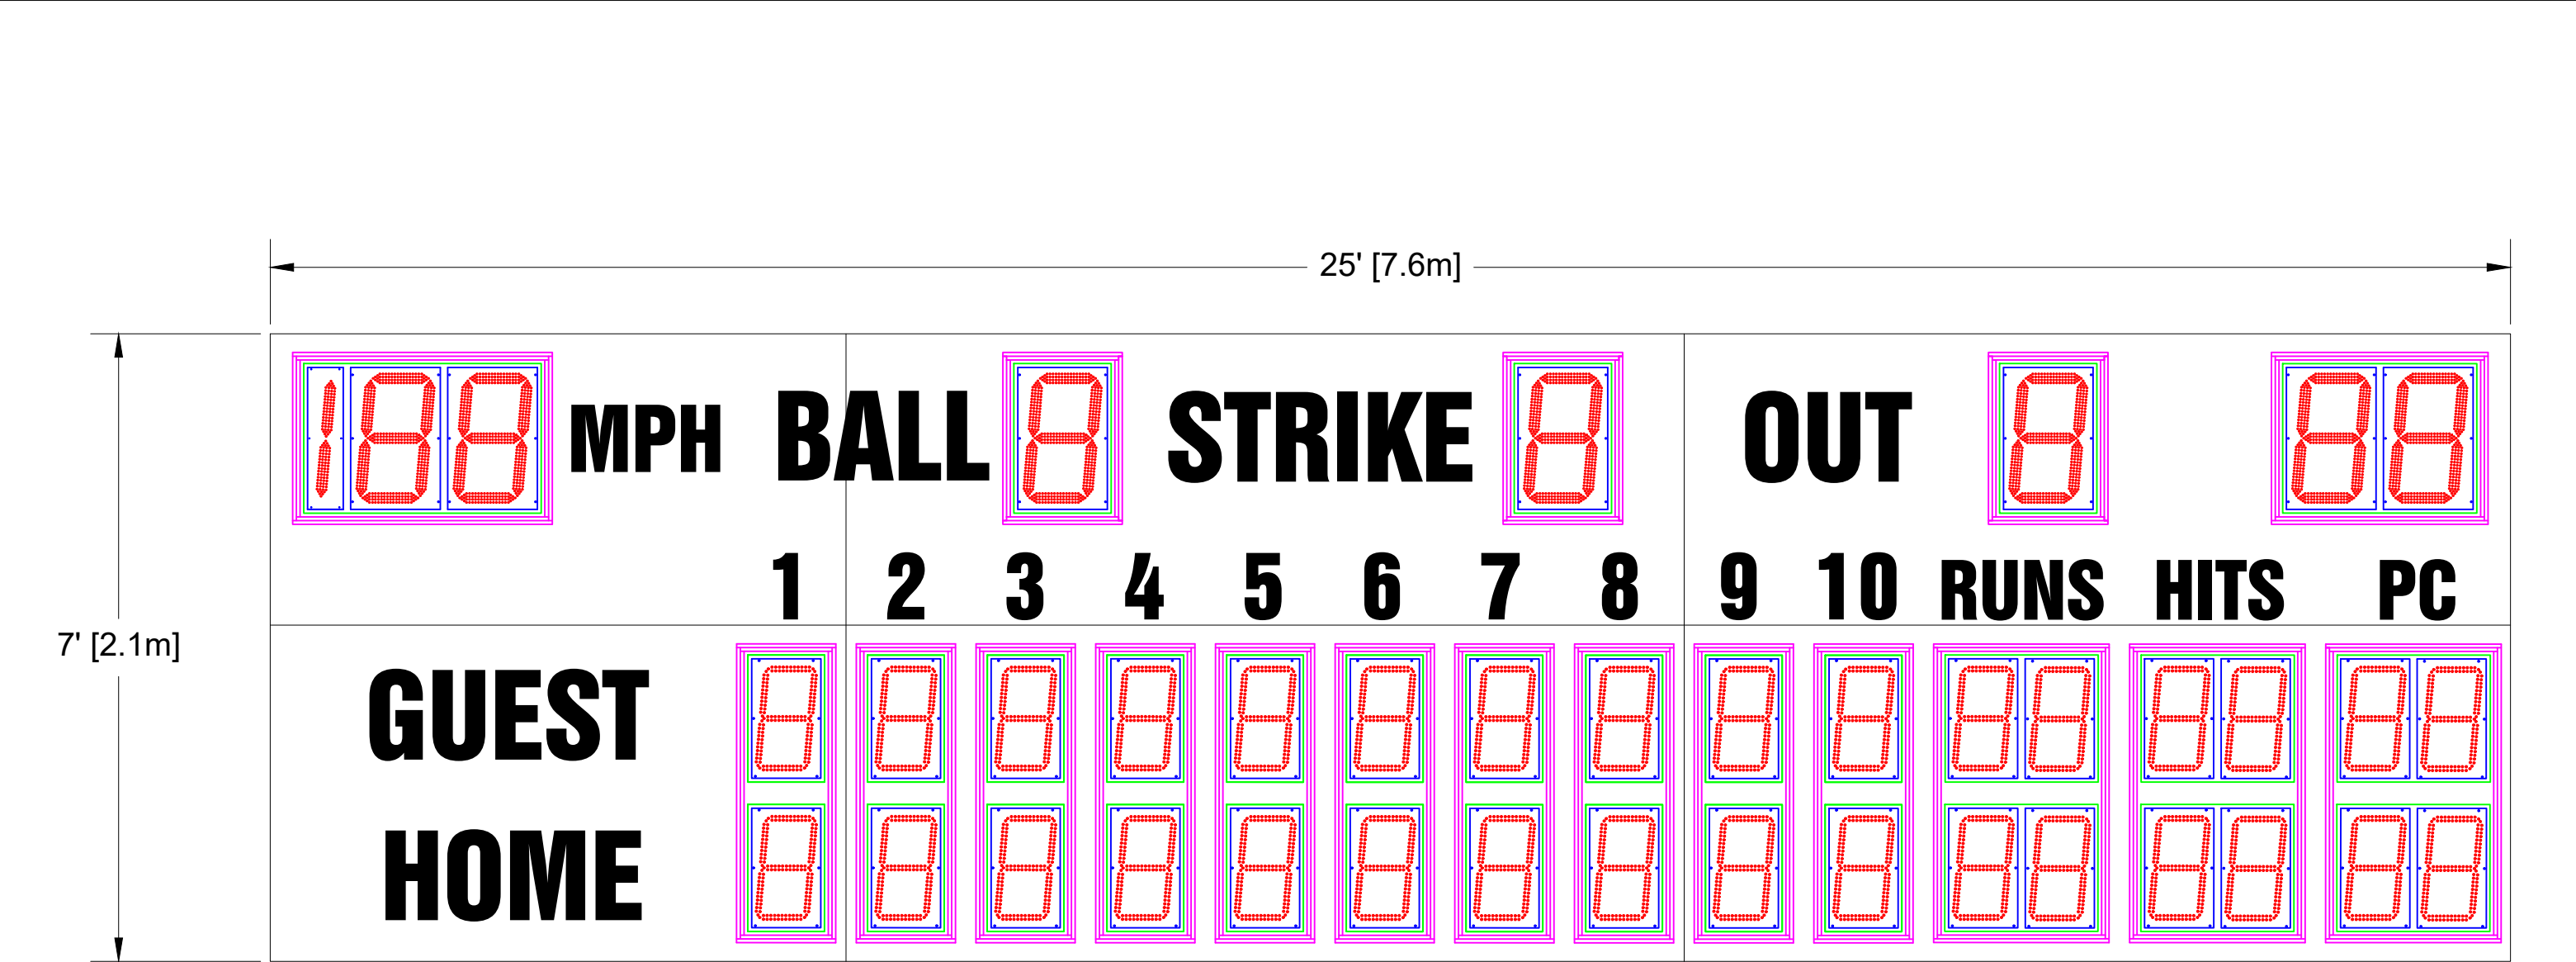

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.

- 17" LED Digits for MPH, BALL, STRIKE, OUT, LAST PLAY
- 14" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT
- 12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME
- 9" White Vinyl Lettering for INNINGS
- 8" White Vinyl Lettering for RUNS, HITS, MPH, PC

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/6/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.


TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M7125BxCV-MP			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7125BUXV-MP	5/6/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE
		MLI	1 OF 1

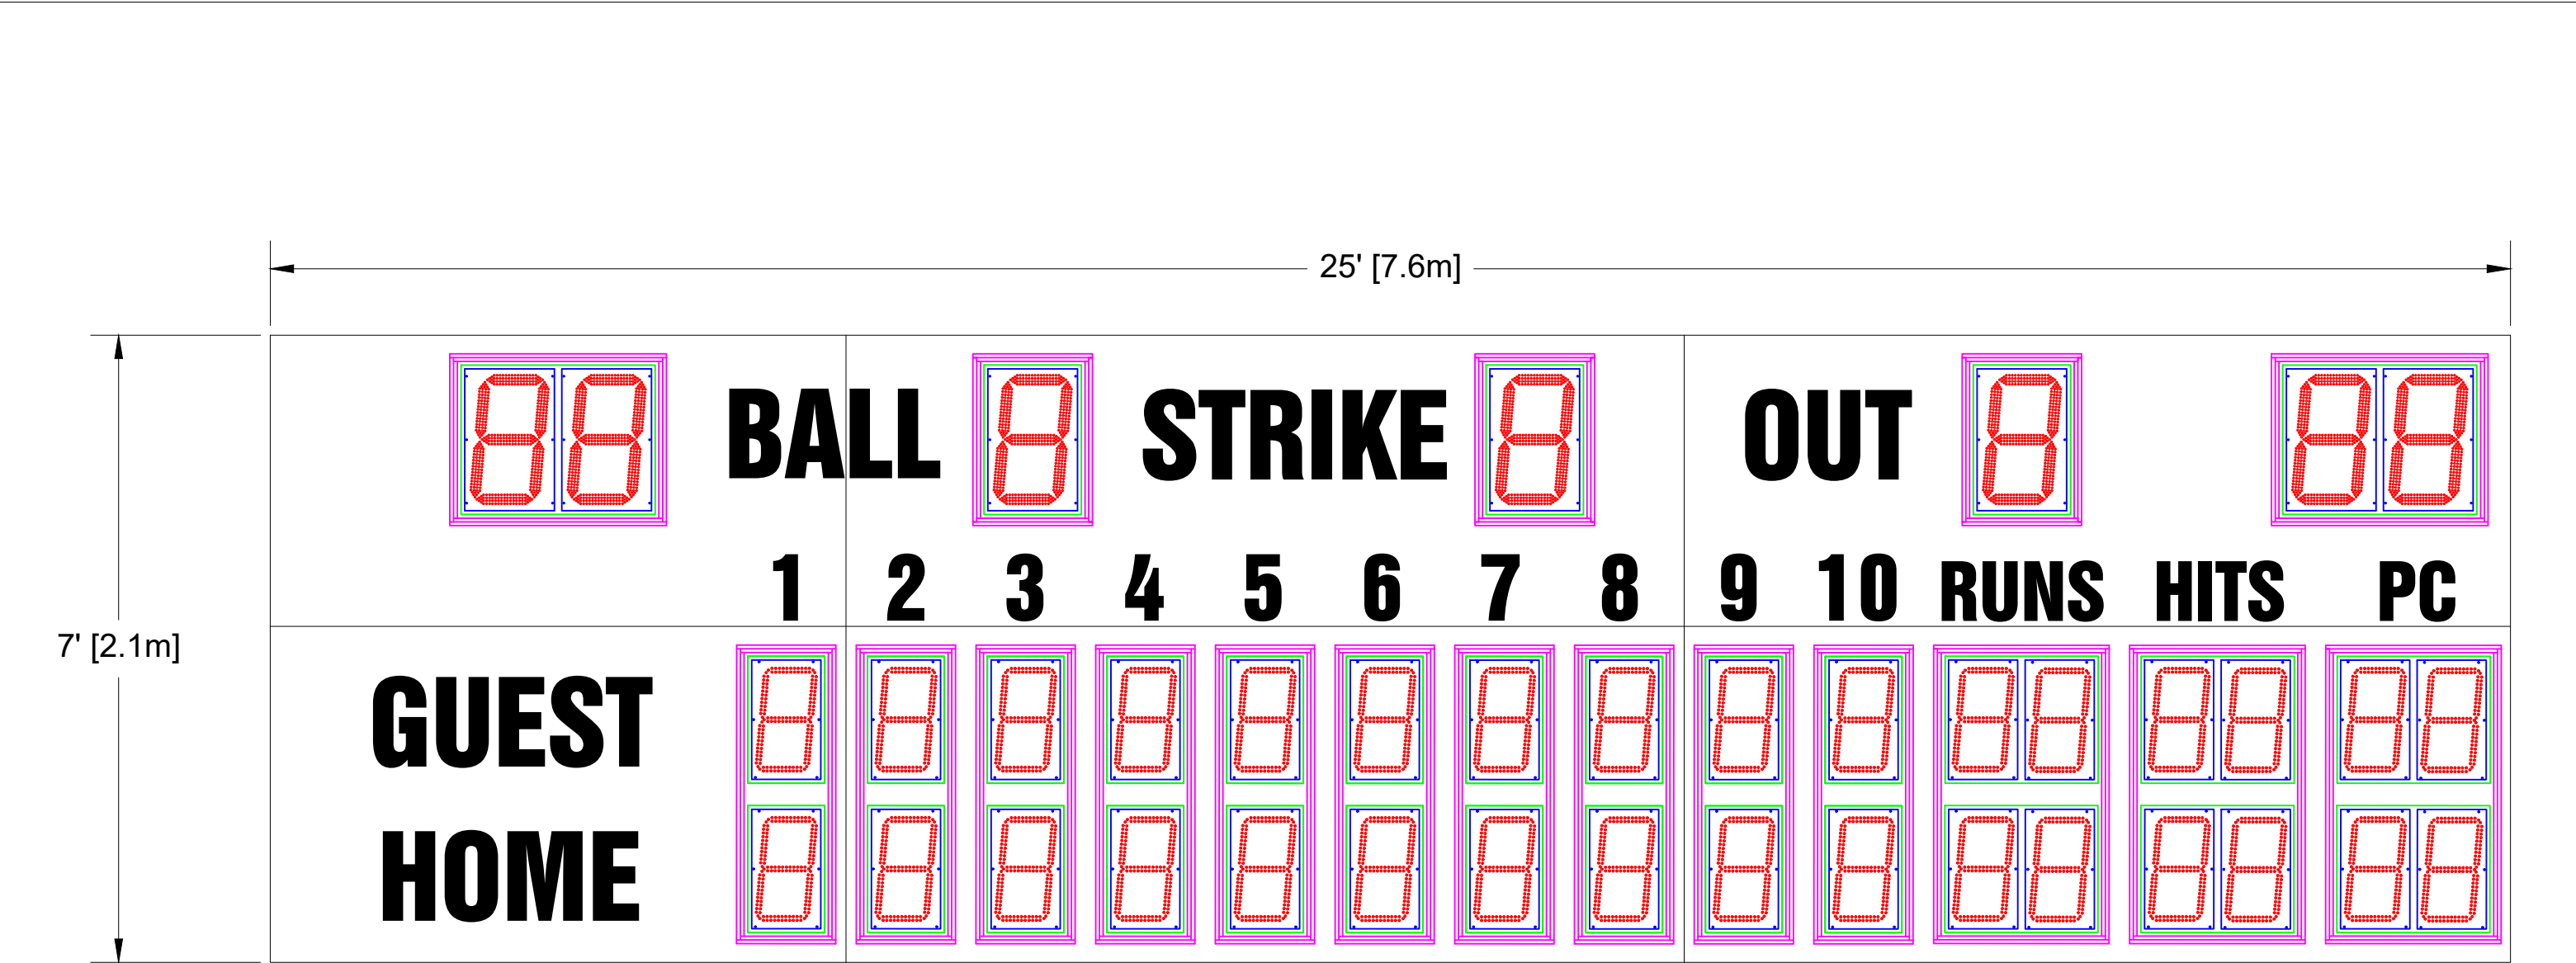

Scoreboard Specifications

Overall size: 25' (W) x 7' (H) x 6" (D)
Approximate Weight: 1021 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit.

- 17" LED Digits for TIMER, BALL, STRIKE, OUT, LAST PLAY
- 14" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT
- 12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME
- 9" White Vinyl Lettering for INNINGS
- 8" White Vinyl Lettering for RUNS, HITS, PC

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/6/2021

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>	<div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div> <div>DESCRIPTION OES ELECTRONIC SCOREBOARDS M7125BxCV-TM</div> <table><tr><td>SIZE</td><td>FILENAME M7125BUXV-TM</td><td>INIT DRAWING DATE 5/6/21</td><td>REV A</td></tr><tr><td>B</td><td colspan="3">USAGE USE FOR REVIEW</td></tr></table> <div>SCALE NTS DRAWN BY MLI PAGE 1 OF 1</div>	SIZE	FILENAME M7125BUXV-TM	INIT DRAWING DATE 5/6/21	REV A	B	USAGE USE FOR REVIEW		
SIZE	FILENAME M7125BUXV-TM	INIT DRAWING DATE 5/6/21	REV A								
B	USAGE USE FOR REVIEW										