

Overall size: 28' (W) x 7' (H) x 6" (D) Approximate Weight: 1167 lbs

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit

17" LED Digits for AT BAT, BALL, STRIKE, OUT, LAST PLAY

14" LED Digits for INNINGS, RUNS, HITS, ERRS

10" Electronic Team Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT

10" White Vinyl Lettering for AT BAT

8" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS

This Layout is for internal reference only.

All LED digits include the following:

- Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle



NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES,

TOLERANCE INFORMATION Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30'


THIRD ANGLE PROJECTIONS

OES ELECTRONIC SCOREBOARDS M7128AxCE-AB INIT DRAWING DATE REV SIZE FILENAME 3/28/21 M7128AUXE-AB

USAGE **USE FOR REVIEW**

DRAW CATHOMPSON PAGE 1 OF 1 SCALE NTS

Email: oes@oes-inc.com

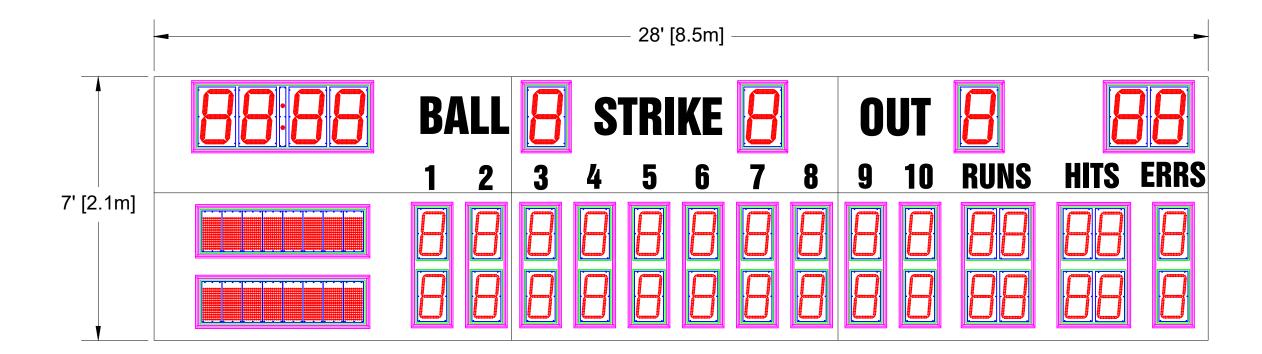

Overall size: 28' (W) x 7' (H) x 6" (D) Approximate Weight: 1167 lbs

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit


17" LED Digits for TIME, BALL, STRIKE, OUT, LAST PLAY


14" LED Digits for INNINGS, RUNS, HITS, ERRS

10" Electronic Team Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT 8" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS

- * Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle

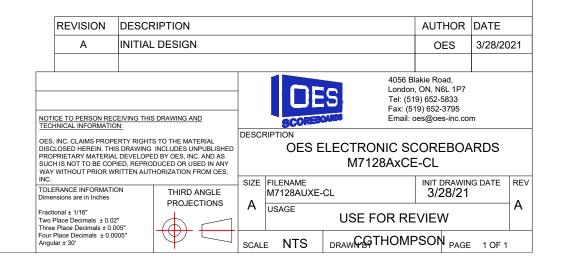

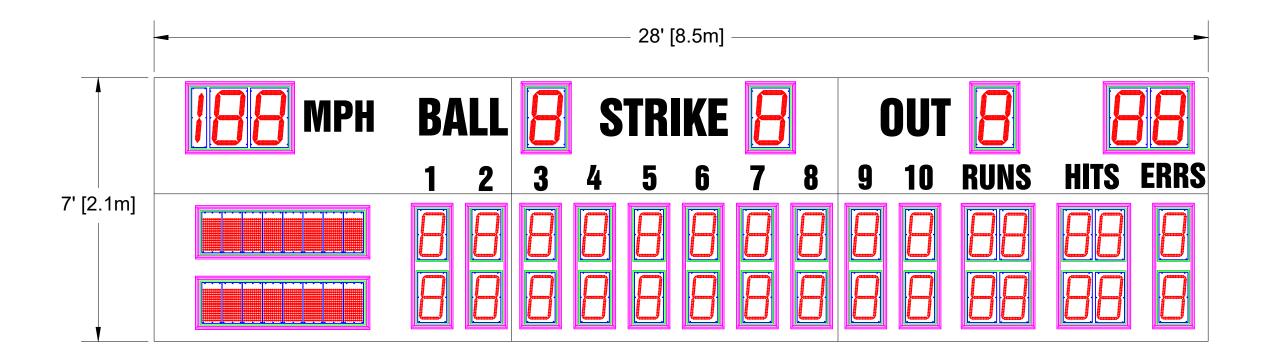

Overall size: 28' (W) x 7' (H) x 6" (D) Approximate Weight: 1167 lbs

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit

17" LED Digits for MPH, BALL, STRIKE, OUT, LAST PLAY

14" LED Digits for INNINGS, RUNS, HITS, ERRS

10" Electronic Team Names at 8 CH


12" White Vinyl Lettering for BALL, STRIKE, OUT


10" White Vinyl Lettering for MPH

8" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS

This Layout is for internal reference only.

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

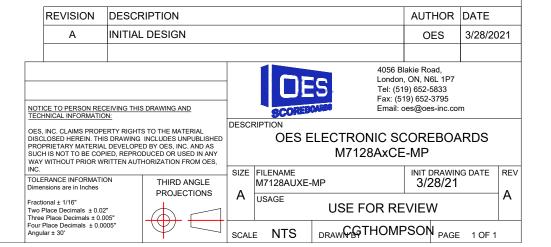

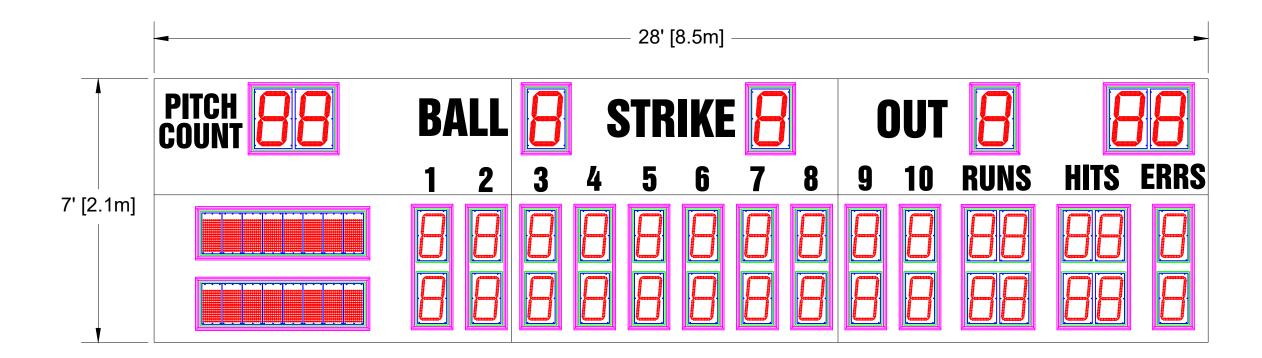

Overall size: 28' (W) x 7' (H) x 6" (D) Approximate Weight: 1167 lbs

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit

17" LED Digits for PITCH COUNT, BALL, STRIKE, OUT, LAST PLAY


14" LED Digits for INNINGS, RUNS, HITS, ERRS


10" Electronic Team Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE

8" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS, PITCH COUNT

- * Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

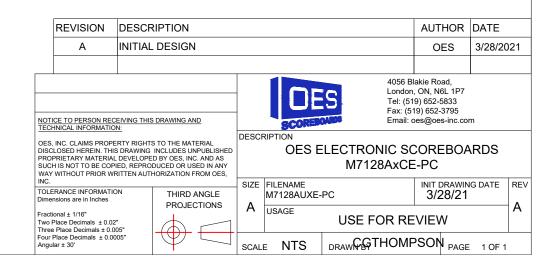

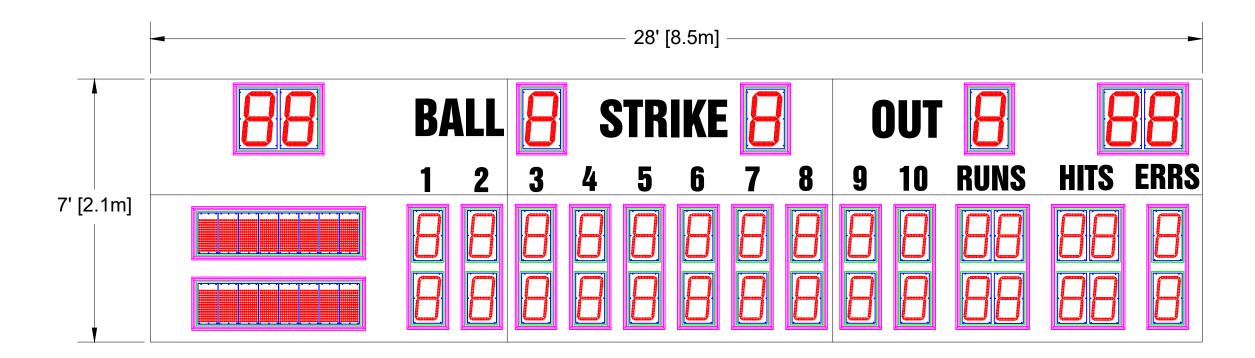

Overall size: 28' (W) x 7' (H) x 6" (D) Approximate Weight: 1167 lbs

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit

17" LED Digits for TIMER, BALL, STRIKE, OUT, LAST PLAY


14" LED Digits for INNINGS, RUNS, HITS, ERRS


10" Electronic Team Names at 8 CH

12" White Vinyl Lettering for BALL, STRIKE, OUT 8" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS

This Layout is for internal reference only.

- * Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

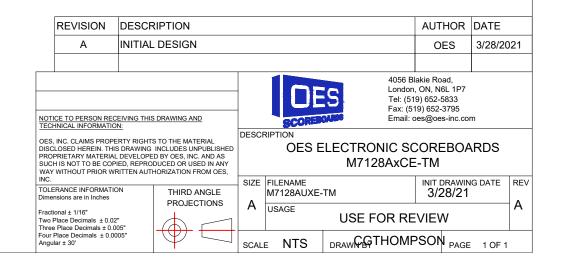

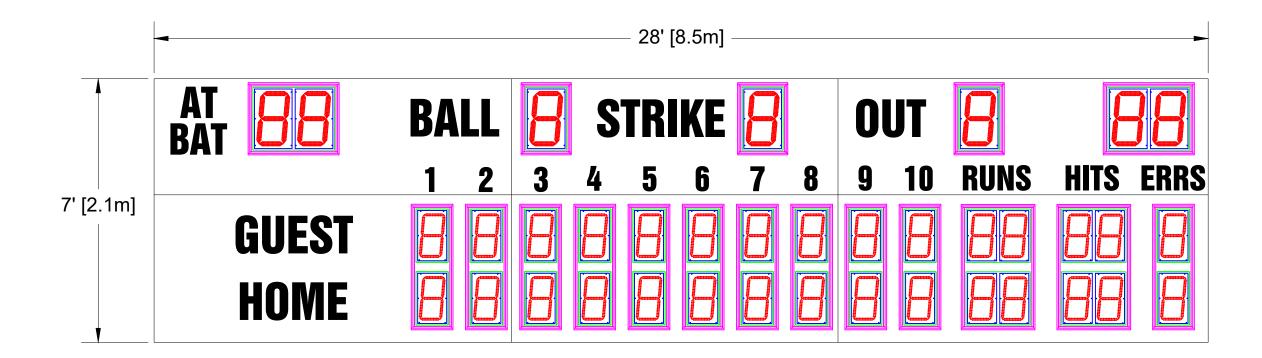

Overall size: 28' (W) x 7' (H) x 6" (D) Approximate Weight: 1167 lbs

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit

17" LED Digits for AT BAT, BALL, STRIKE, OUT, LAST PLAY

14" LED Digits for INNINGS, RUNS, HITS, ERRS


12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME


10" White Vinyl Lettering for AT BAT

8" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS

This Layout is for internal reference only.

- * Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

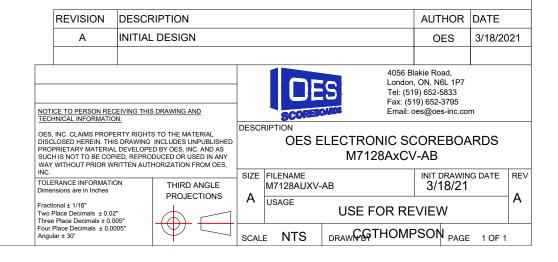

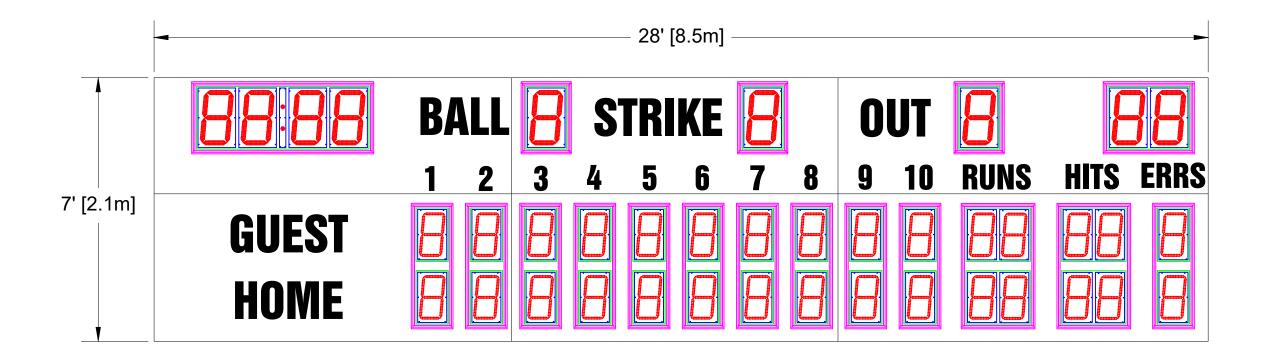

Overall size: 28' (W) x 7' (H) x 6" (D) Approximate Weight: 1167 lbs

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the 7th Inning Digit


17" LED Digits for TIME, BALL, STRIKE, OUT, LAST PLAY 14" LED Digits for INNINGS, RUNS, HITS, ERRS

12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME 8" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS

This Layout is for internal reference only.

- * Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle

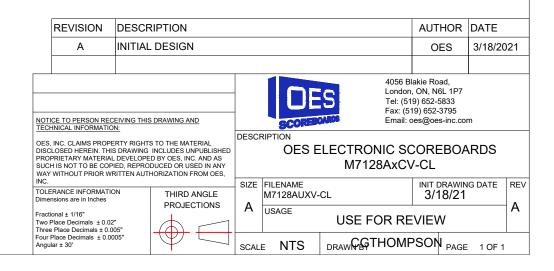

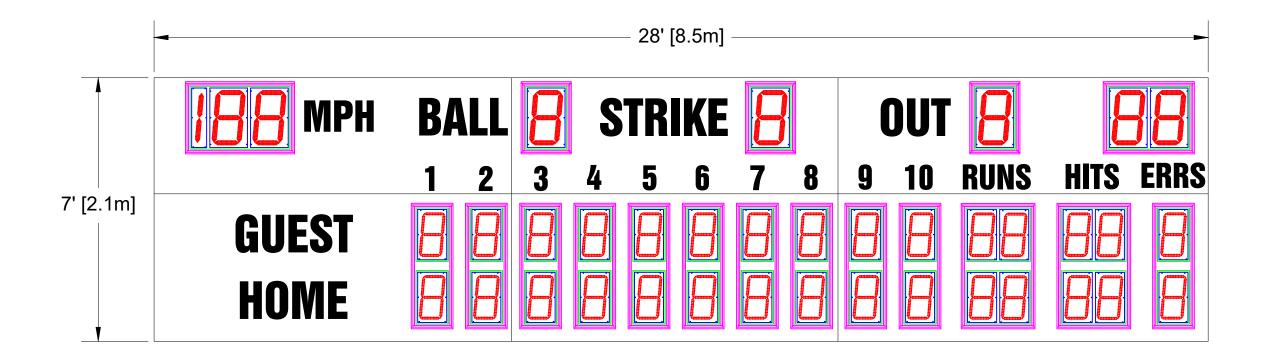

Overall size: 28' (W) x 7' (H) x 6" (D) Approximate Weight: 1167 lbs


Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the 7th Inning Digit

17" LED Digits for MPH, BALL, STRIKE, OUT, LAST PLAY 14" LED Digits for INNINGS, RUNS, HITS, ERRS

12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME 10" White Vinyl Lettering for MPH 8" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS

- * Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle

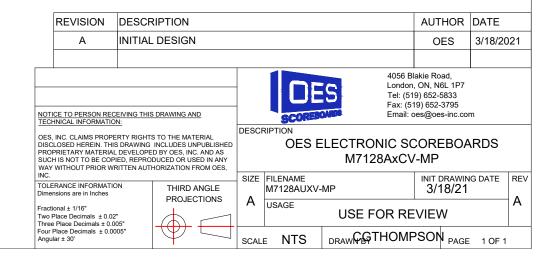

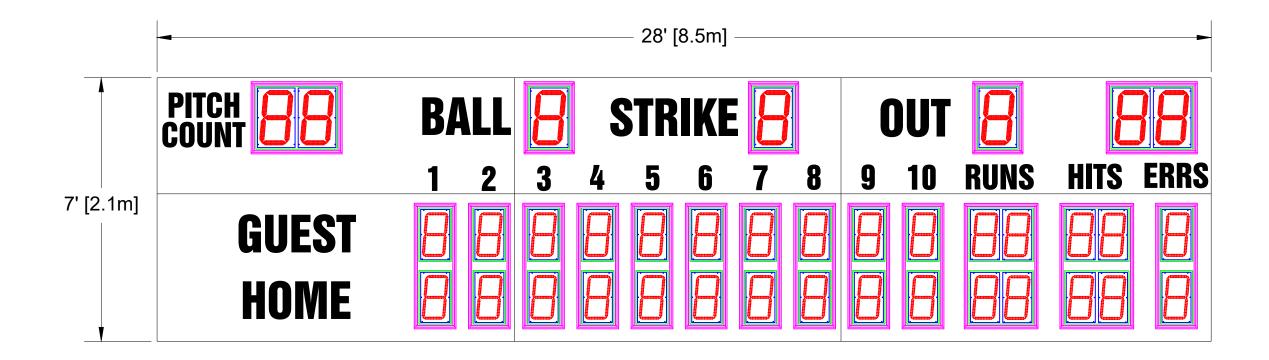

Overall size: 28' (W) x 7' (H) x 6" (D)
Approximate Weight: 1167 lbs


Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the 7th Inning Digit

17" LED Digits for PITCH COUNT, BALL, STRIKE, OUT, LAST PLAY 14" LED Digits for INNINGS, RUNS, HITS, ERRS

12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME 8" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS, PITCH COUNT

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

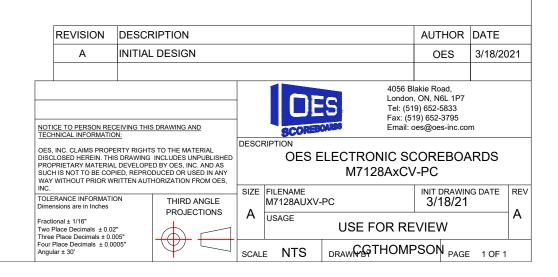

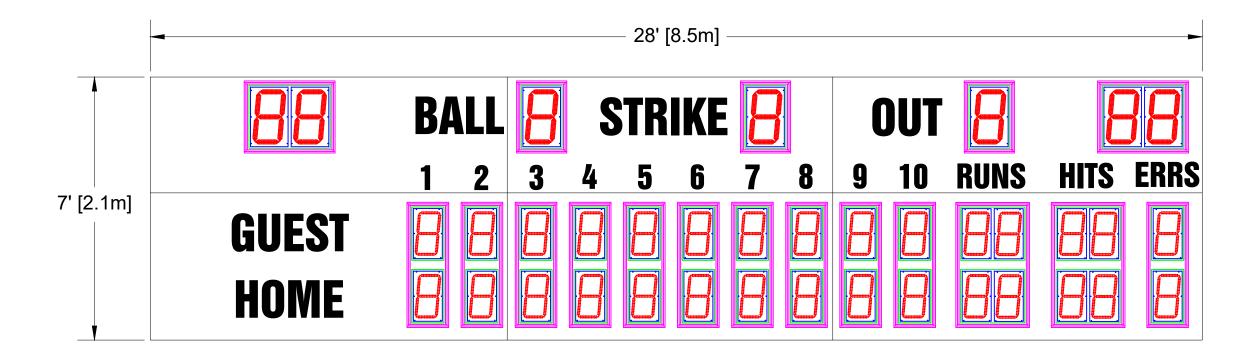

Overall size: 28' (W) x 7' (H) x 6" (D) Approximate Weight: 1167 lbs

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 7th Inning Digit

17" LED Digits for TIMER, BALL, STRIKE, OUT, LAST PLAY

14" LED Digits for INNINGS, RUNS, HITS, ERRS

12" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME 8" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS

This Layout is for internal reference only.

- * Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

