

Scoreboard Specifications

Overall size: 36' (W) x 8' (H) x 6" (D)
Approximate Weight: 1460 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 8th Inning Digit.



22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, AT BAT
17" LED Digits for INNINGS, RUNS, HITS, ERRS
15" Electronic Team Names at 8 CH


15" White Vinyl Lettering for BALL, STRIKE, OUT
10" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS, AT BAT

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/24/2023

		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>				
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		DESCRIPTION OES ELECTRONIC SCOREBOARDS M7136AxCE-AB				
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		<div><div>SIZE</div><div>FILENAME M7136AUXE-AB</div><div>INIT DRAWING DATE 3/24/23</div></div>		REV A		
<div>THIRD ANGLE PROJECTIONS</div> <div></div>		<div>B</div> <div>USAGE</div> <div>USE FOR REVIEW</div>				
SCALE		NTS	DRAWN BY	VPERUMAL	PAGE	1 OF 1

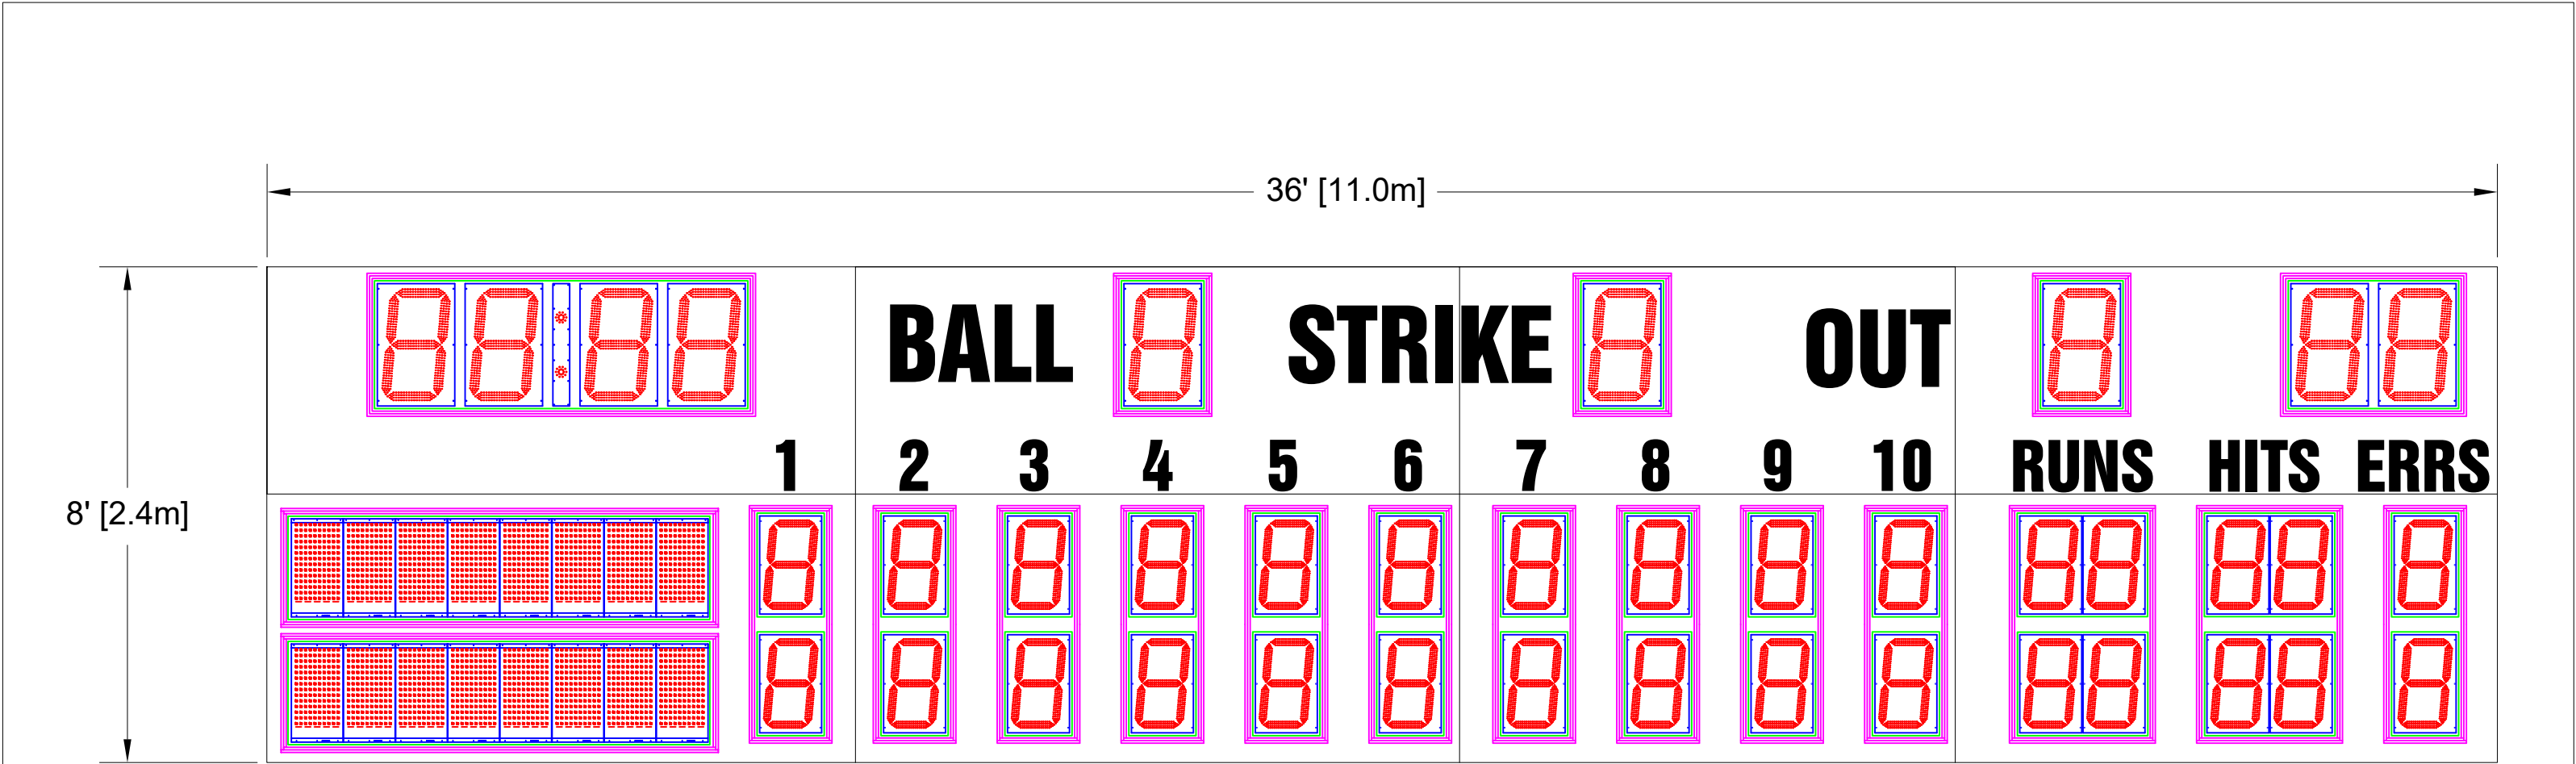

Scoreboard Specifications

Overall size: 36' (W) x 8' (H) x 6" (D)
Approximate Weight: 1484 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 8th Inning Digit.

22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, TIME
17" LED Digits for INNINGS, RUNS, HITS, ERRS
15" Electronic Team Names at 8 CH

15" White Vinyl Lettering for BALL, STRIKE, OUT
10" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/28/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.


TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M7136AxCE-CL			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7136AUXE-CL	3/28/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	CCTHOMPSON
PAGE		1 OF 1	

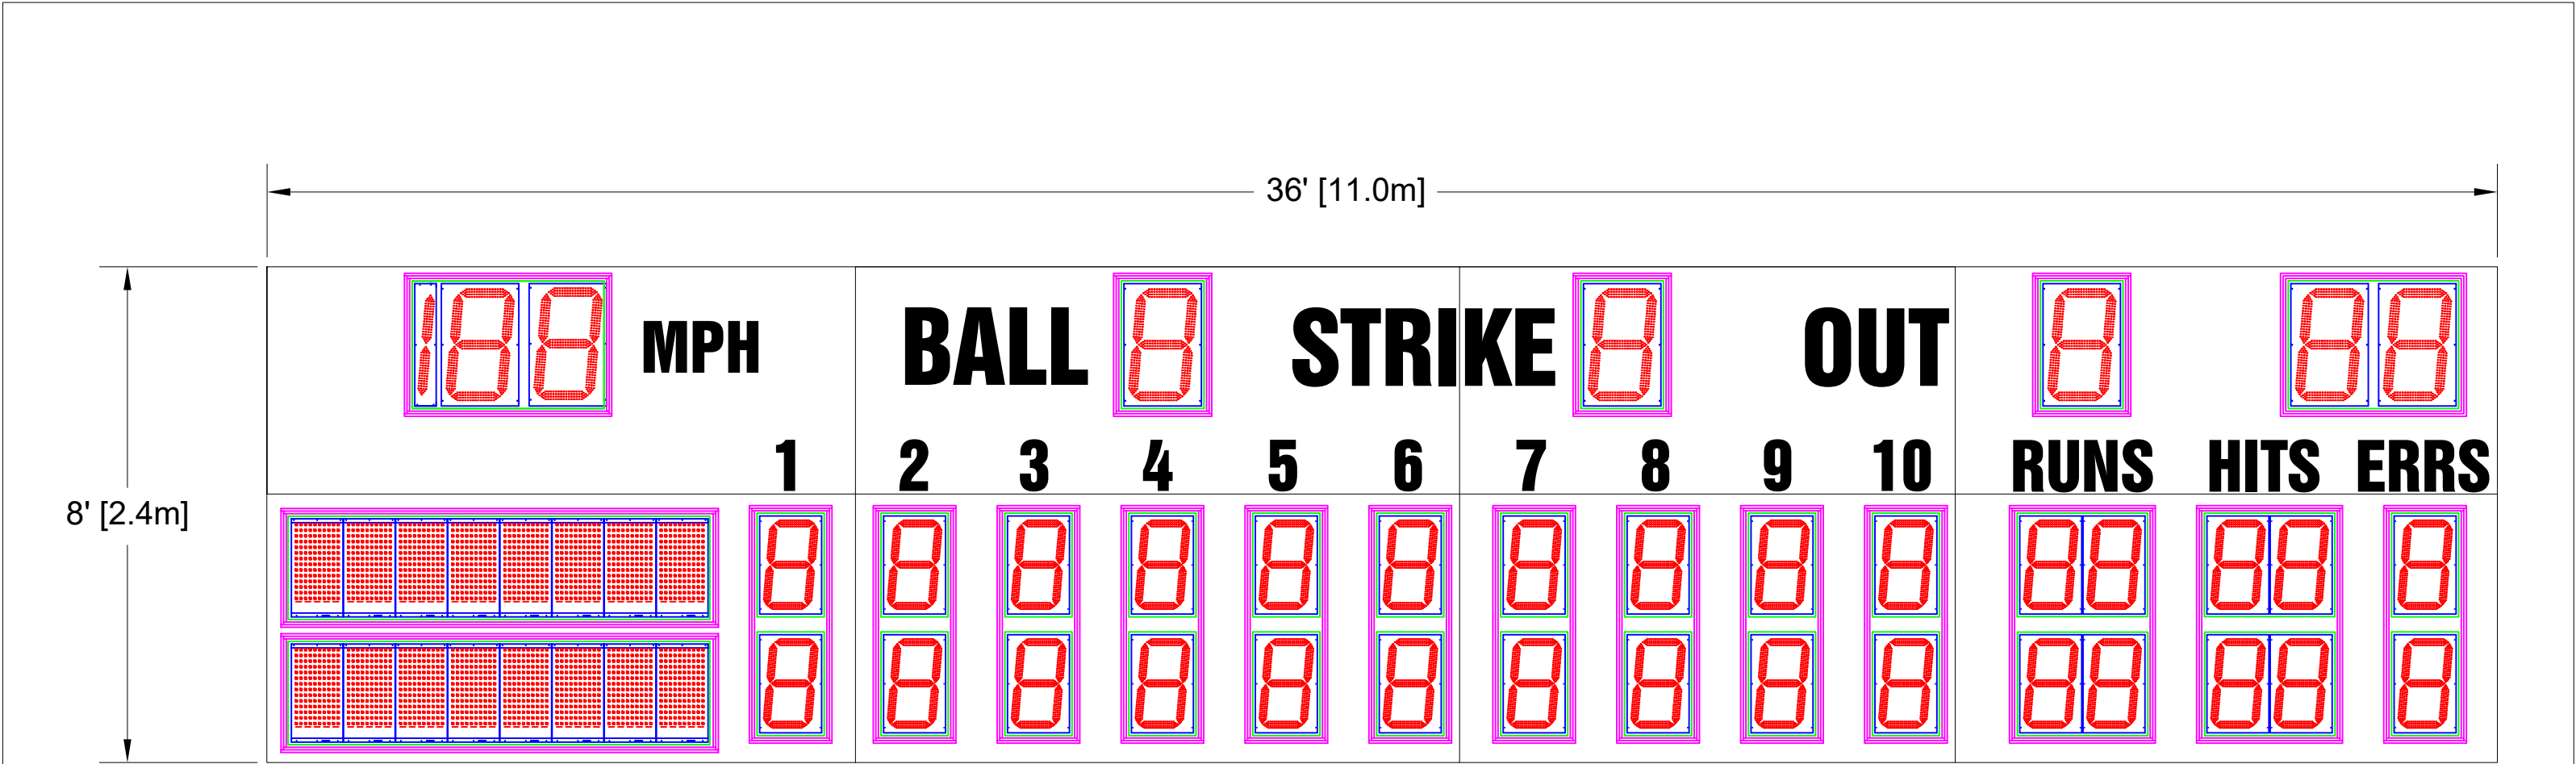

Scoreboard Specifications

Overall size: 36' (W) x 8' (H) x 6" (D)
Approximate Weight: 1469 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.



Incoming Mains Power and Data Location: Behind the 8th Inning Digit.


22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, MPH
17" LED Digits for INNINGS, RUNS, HITS, ERRS
10" Electronic Team Names at 8 CH

15" White Vinyl Lettering for BALL, STRIKE, OUT
10" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS, MPH

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE			
A		INITIAL DESIGN		OES	3/28/2021			
<u>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</u>				4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com				
OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		DESCRIPTION OES ELECTRONIC SCOREBOARDS M7136AxCE-MP						
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		SIZE		FILENAME	INIT DRAWING DATE	REV		
		B		M7136AUXE-MP	3/28/21		A	
				USAGE				
				USE FOR REVIEW				
		SCALE		NTS	DRAWN BY	CGTHOMPSON	PAGE	1 OF 1

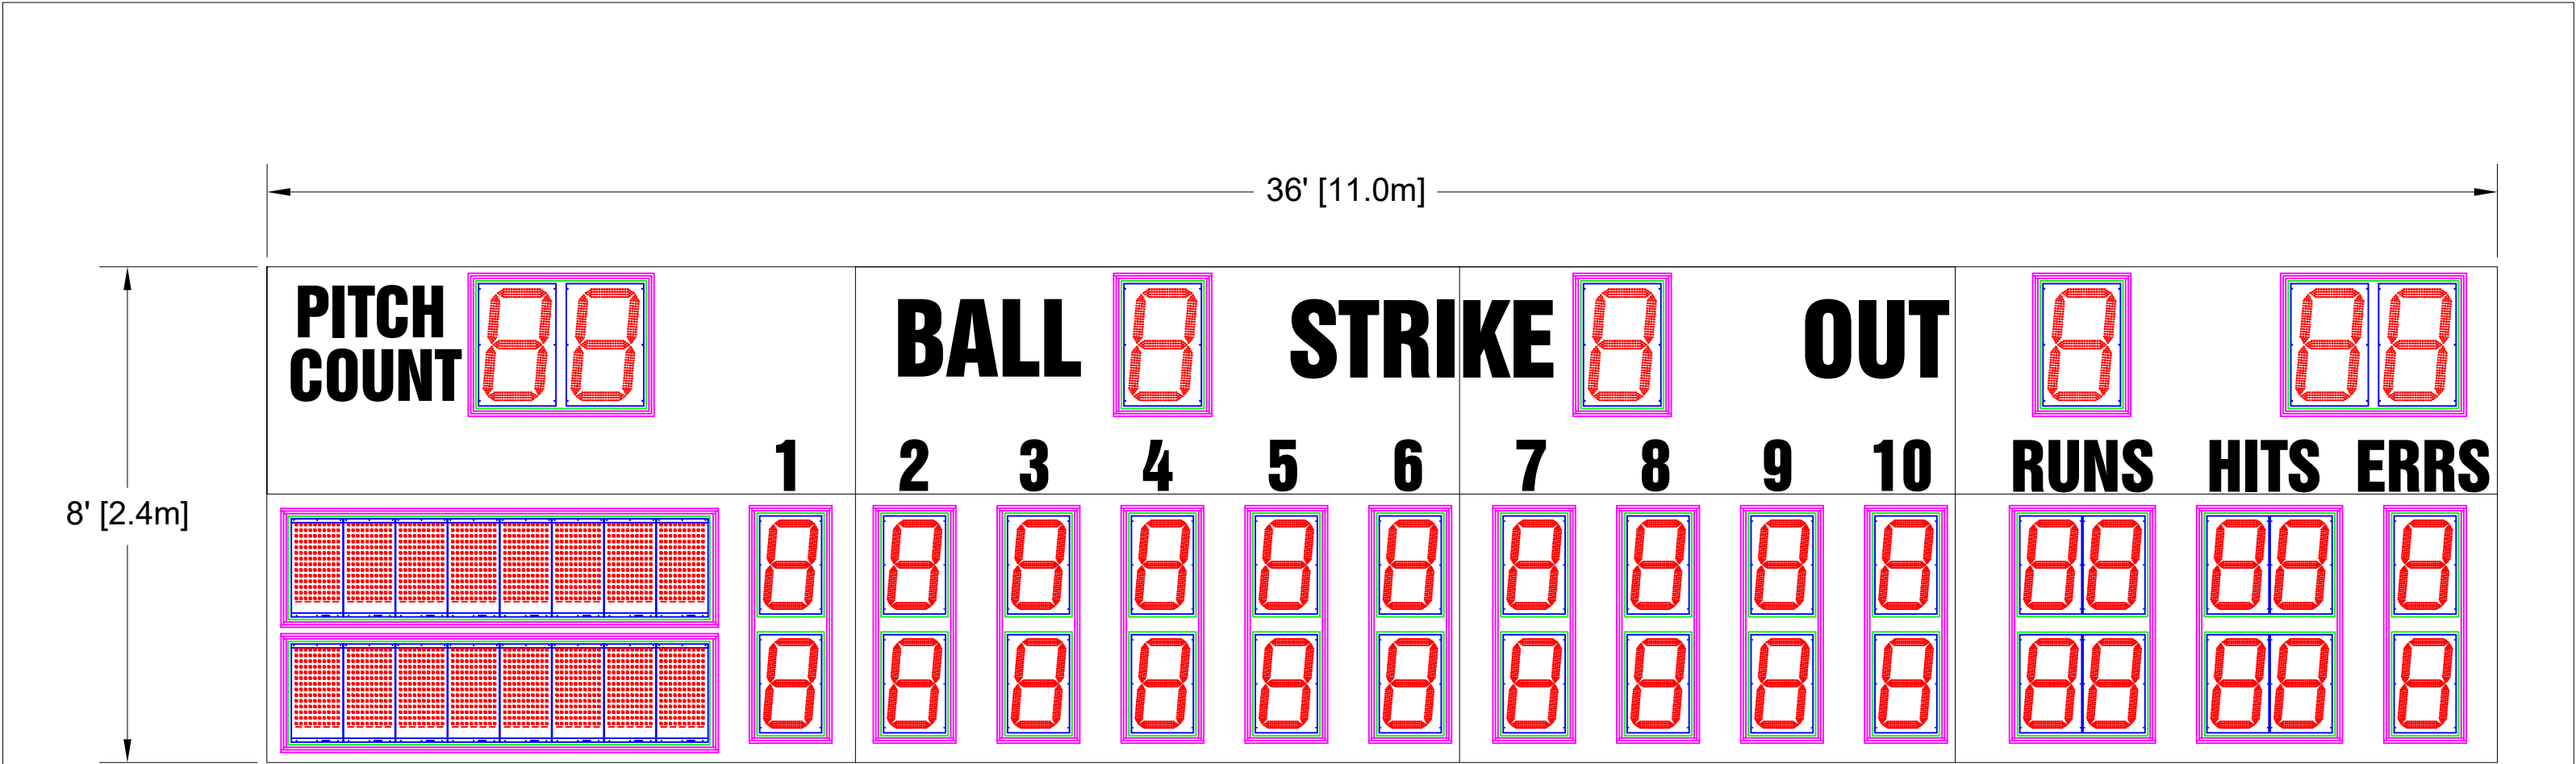

Scoreboard Specifications

Overall size: 36' (W) x 8' (H) x 6" (D)
Approximate Weight: 1460 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 8th Inning Digit.

- 22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, PITCH COUNT
- 17" LED Digits for INNINGS, RUNS, HITS, ERRS
- 15" Electronic Team Names at 8 CH
- 15" White Vinyl Lettering for BALL, STRIKE, OUT
- 10" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS, PITCH COUNT

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/28/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION
Dimensions are in Inches


Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M7136AxCE-PC			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7136AUXE-PC	3/28/21	A
	USAGE		
USE FOR REVIEW			
SCALE	NTS	DRAWN BY	PAGE 1 OF 1

CGTHOMPSON

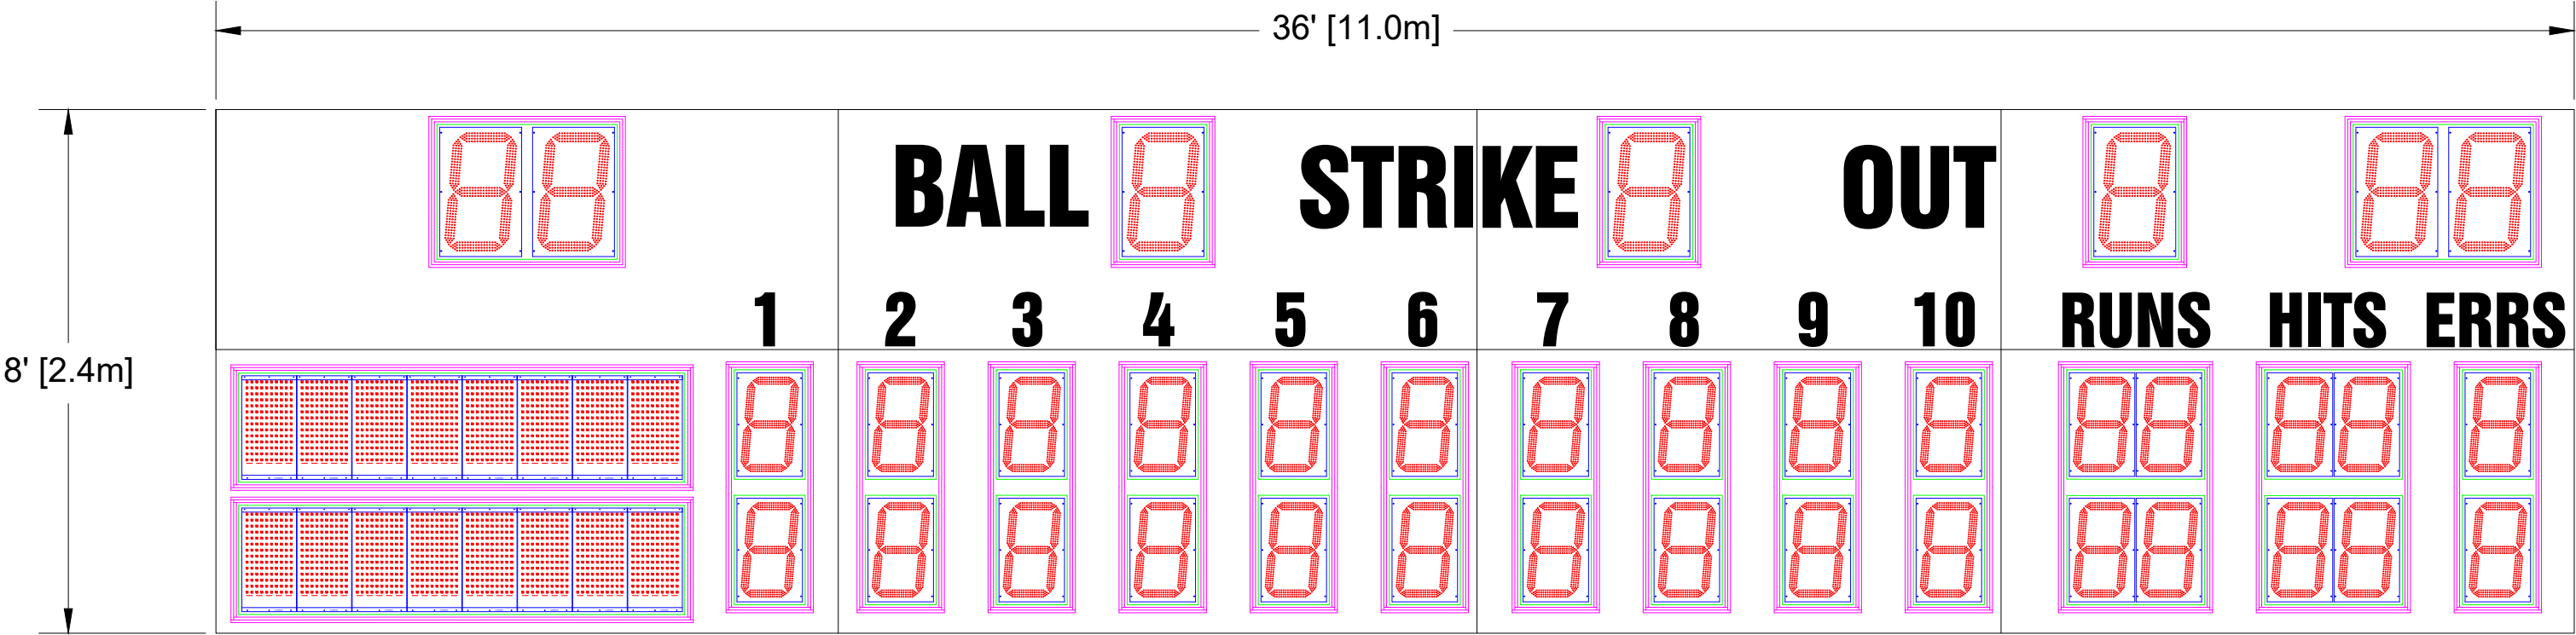

Scoreboard Specifications

Overall size: 36' (W) x 8' (H) x 6" (D)
Approximate Weight: 1460 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the 8th Inning Digit.

22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, TIMER
17" LED Digits for INNINGS, RUNS, HITS, ERRS
15" Electronic Team Names at 8 CH

15" White Vinyl Lettering for BALL, STRIKE, OUT
10" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/27/2022
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div><div>TOLERANCE INFORMATION</div><div>Dimensions are in Inches</div><div>Fractional ± 1/16"</div><div>Two Place Decimals ± 0.02"</div><div>Three Place Decimals ± 0.005"</div><div>Four Place Decimals ± 0.0005"</div><div>Angular ± 30°</div></div> <div><div>THIRD ANGLE PROJECTIONS</div><div></div></div>		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div> <div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS</div> <div>M7136AxCE-TM</div>	
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M7136AUXE-TM	5/27/22	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE 1 OF 1
		VPERUMAL	

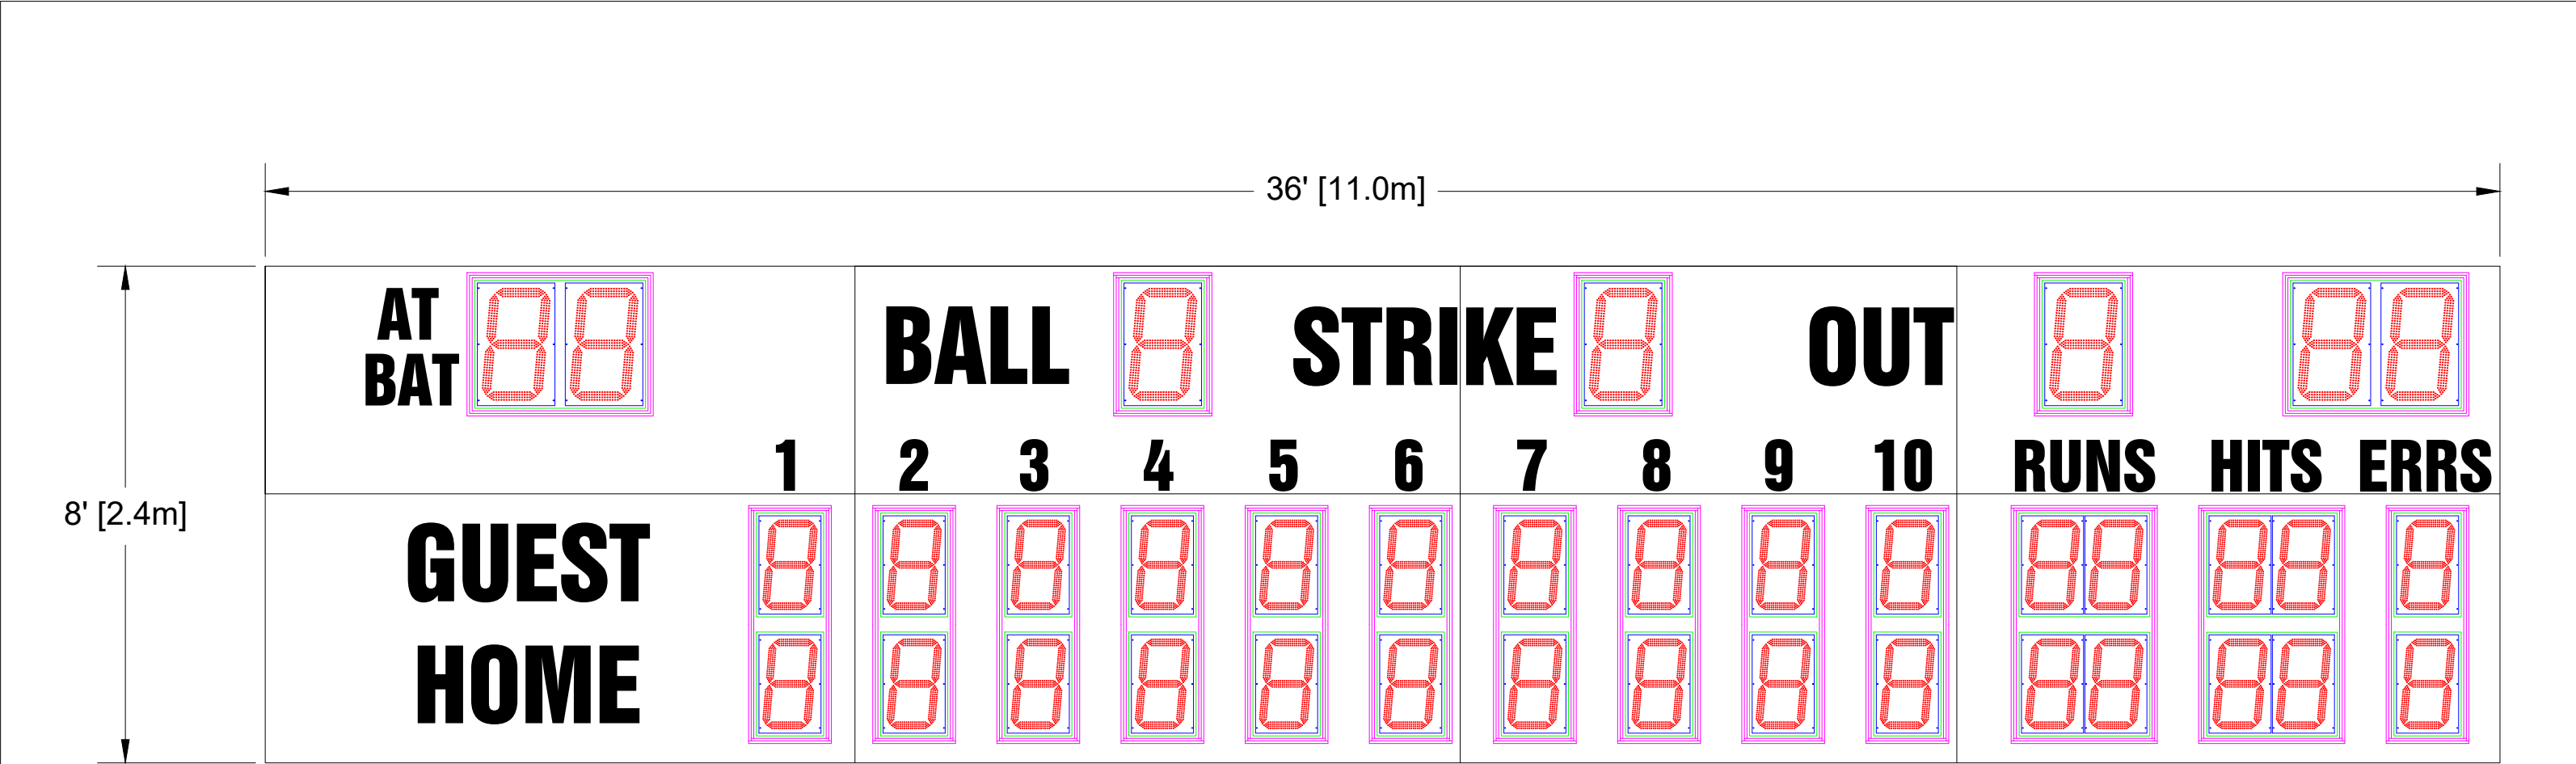

Scoreboard Specifications

Overall size: 36' (W) x 8' (H) x 6" (D)
Approximate Weight: 1533 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the 8th Inning Digit.


22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, AT BAT
17" LED Digits for INNINGS, RUNS, HITS, ERRS


15" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME
10" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS, AT BAT

- This Layout is for internal reference only.
- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	5/27/2022

		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>			
		DESCRIPTION OES ELECTRONIC SCOREBOARDS M7136AxCV-AB			
SIZE		FILENAME M7136AUXV-AB		INIT DRAWING DATE 5/27/22	
B		USAGE			REV A
		USE FOR REVIEW			
SCALE		NTS		DRAWN BY CGTHOMPSON	
				PAGE 1 OF 1	

<p>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</p> <p>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</p> <p>TOLERANCE INFORMATION Dimensions are in Inches</p> <p>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</p>		<p>THIRD ANGLE PROJECTIONS</p> 
--	--	--

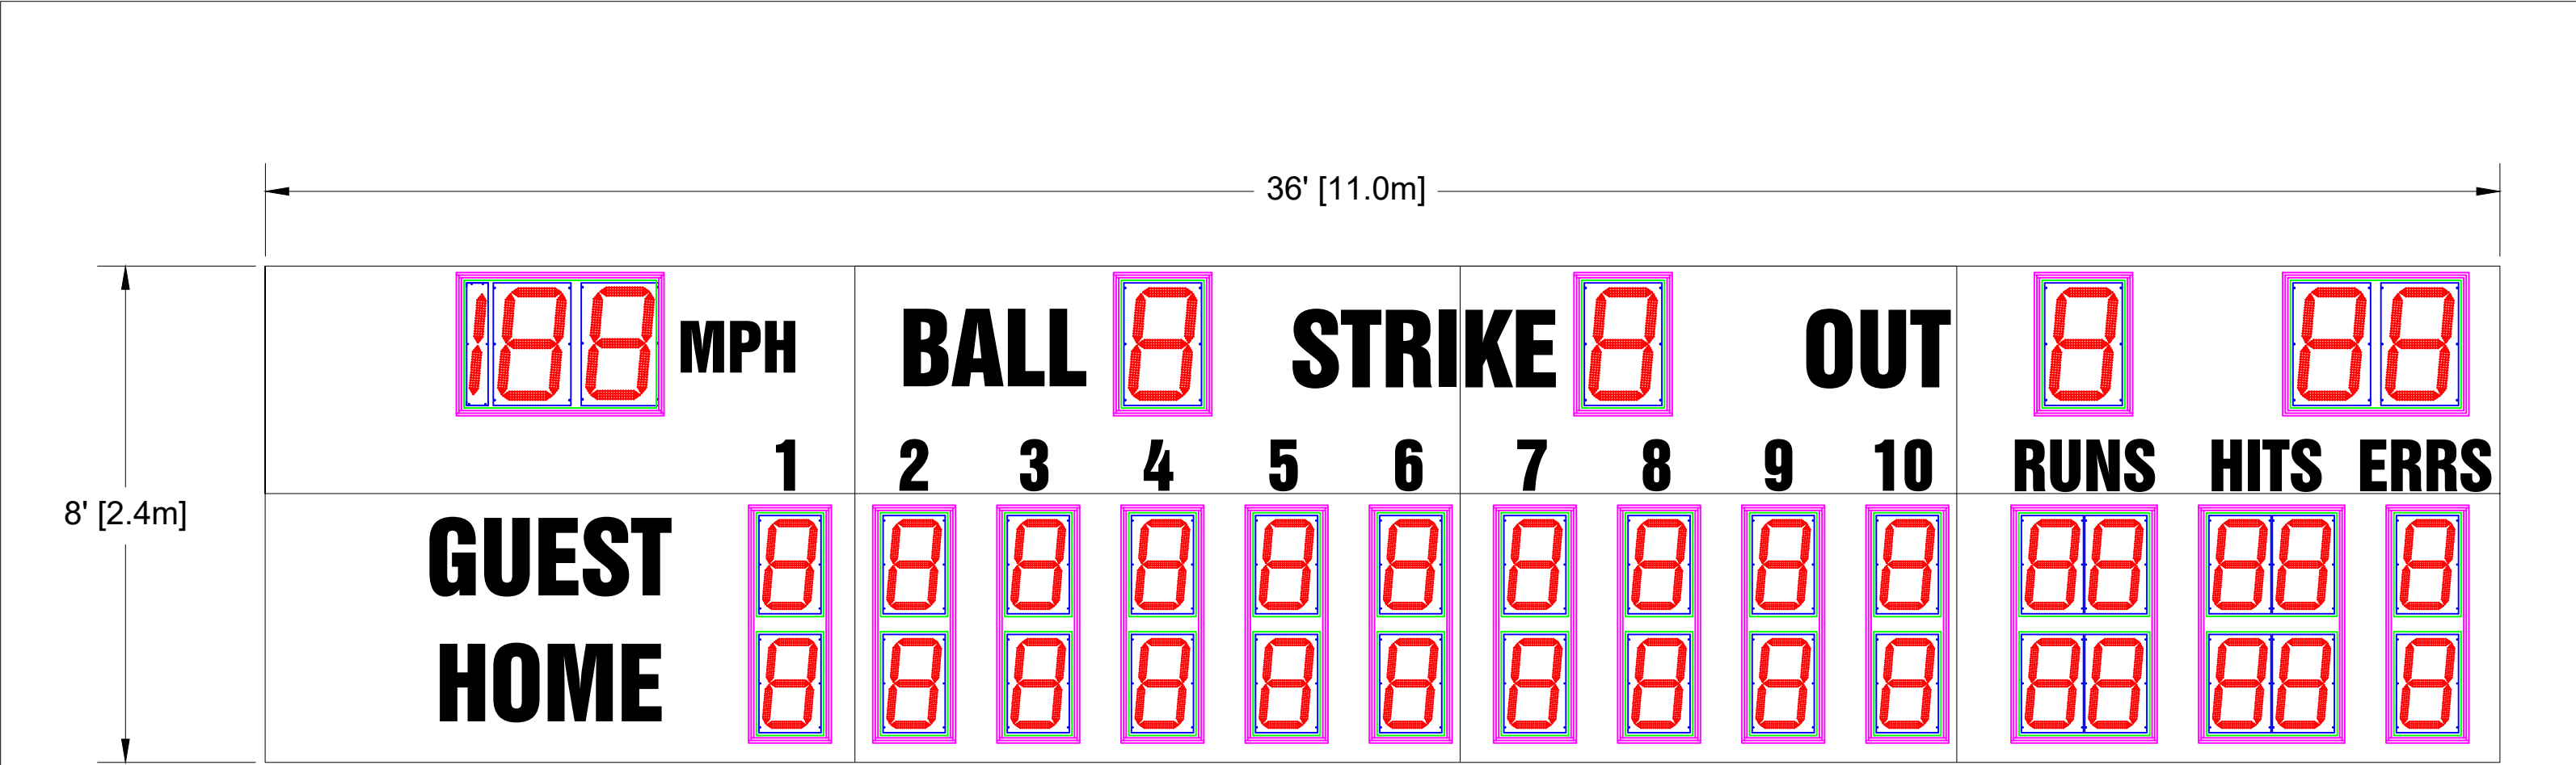

Scoreboard Specifications

Overall size: 36' (W) x 8' (H) x 6" (D)
Approximate Weight: 1533 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 8th Inning Digit.

22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, MPH
17" LED Digits for INNINGS, RUNS, HITS, ERRS

15" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME
10" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS, MPH

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/18/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.


TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M7136AxCV-MP			
SIZE	FILENAME M7136AUXV-MP	INIT DRAWING DATE 3/18/21	REV A
B	USAGE USE FOR REVIEW		
SCALE	NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1

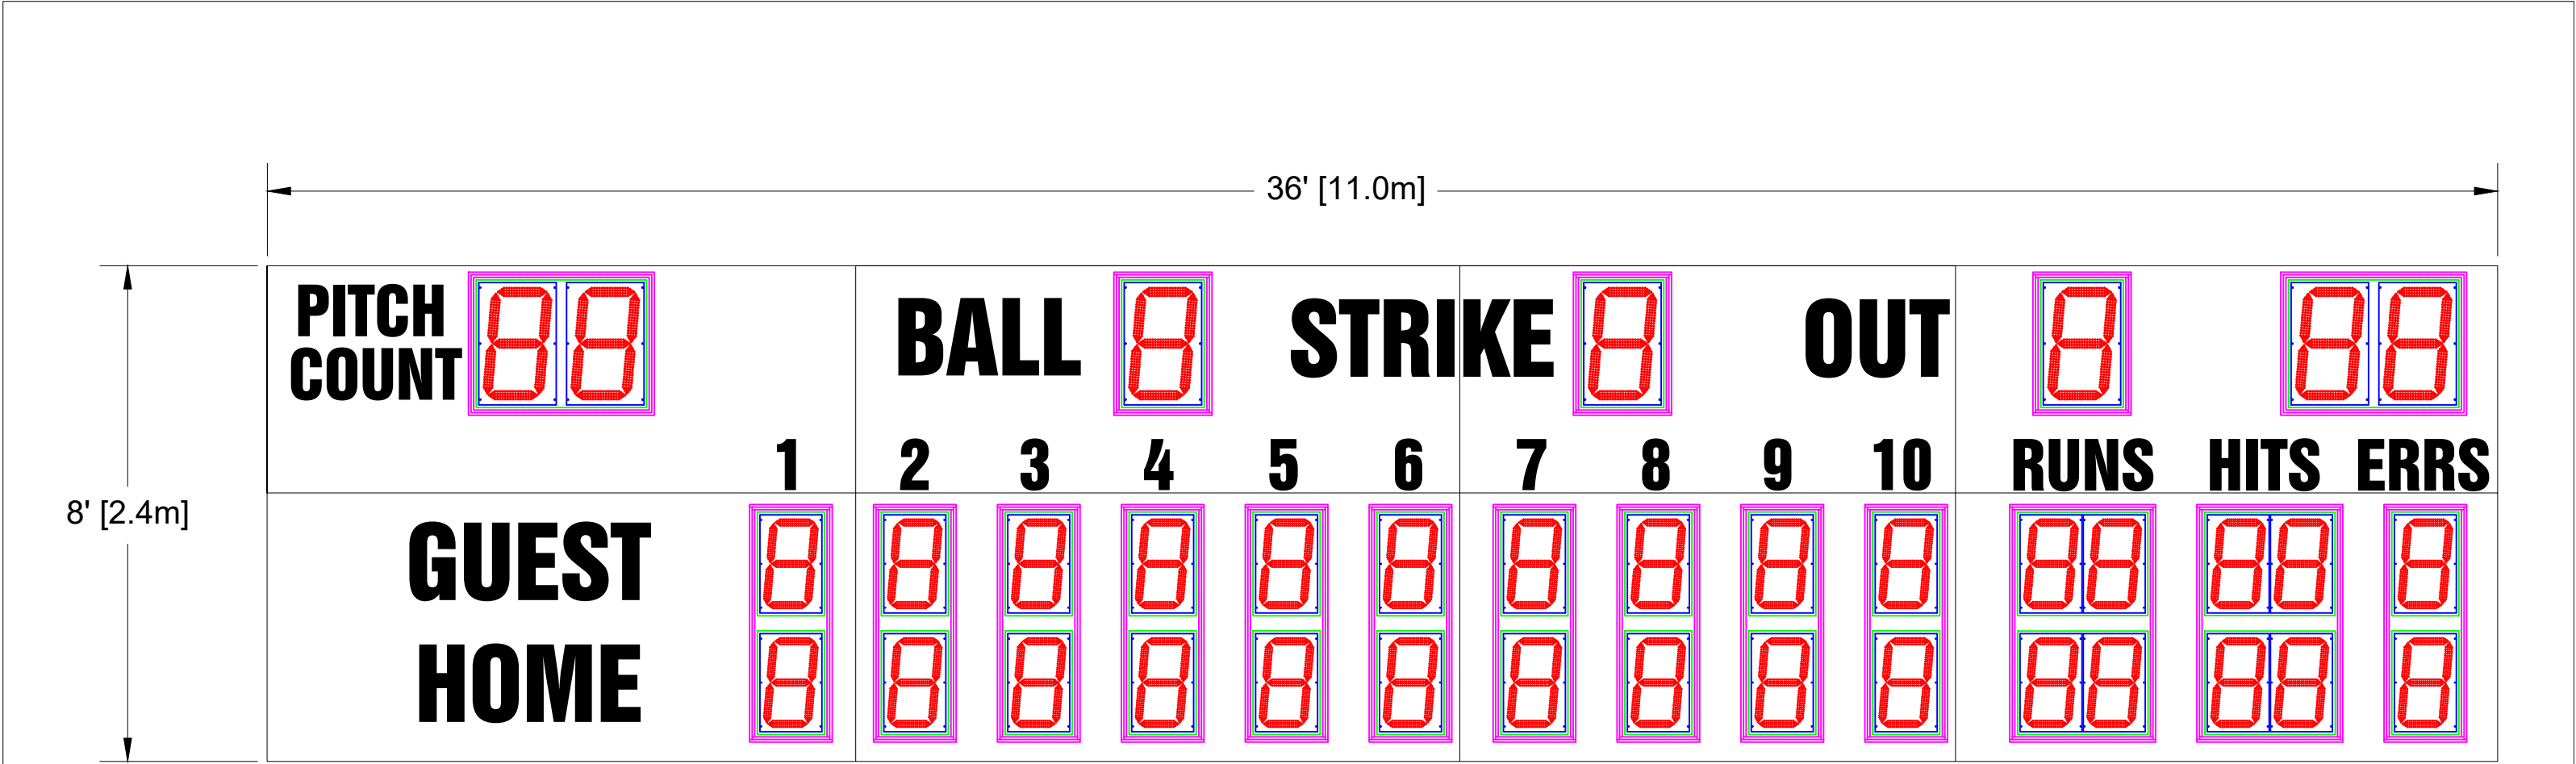

Scoreboard Specifications



Overall size: 36' (W) x 8' (H) x 6" (D)
Approximate Weight: 1533 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the 8th Inning Digit.

22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, PITCH COUNT
17" LED Digits for INNINGS, RUNS, HITS, ERRS

15" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME
10" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS, PITCH COUNT

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/18/2021
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
		DESCRIPTION	
		OES ELECTRONIC SCOREBOARDS M7136AxCV-PC	
TOLERANCE INFORMATION Dimensions are in Inches		SIZE	FILENAME
		B	M7136AUXV-PC
		INIT DRAWING DATE	
		3/18/21	
		USAGE	
		USE FOR REVIEW	
		REV	
		A	
THIRD ANGLE PROJECTIONS			
			
		SCALE	NTS
		DRAWN BY	CGTHOMPSON
		PAGE	1 OF 1

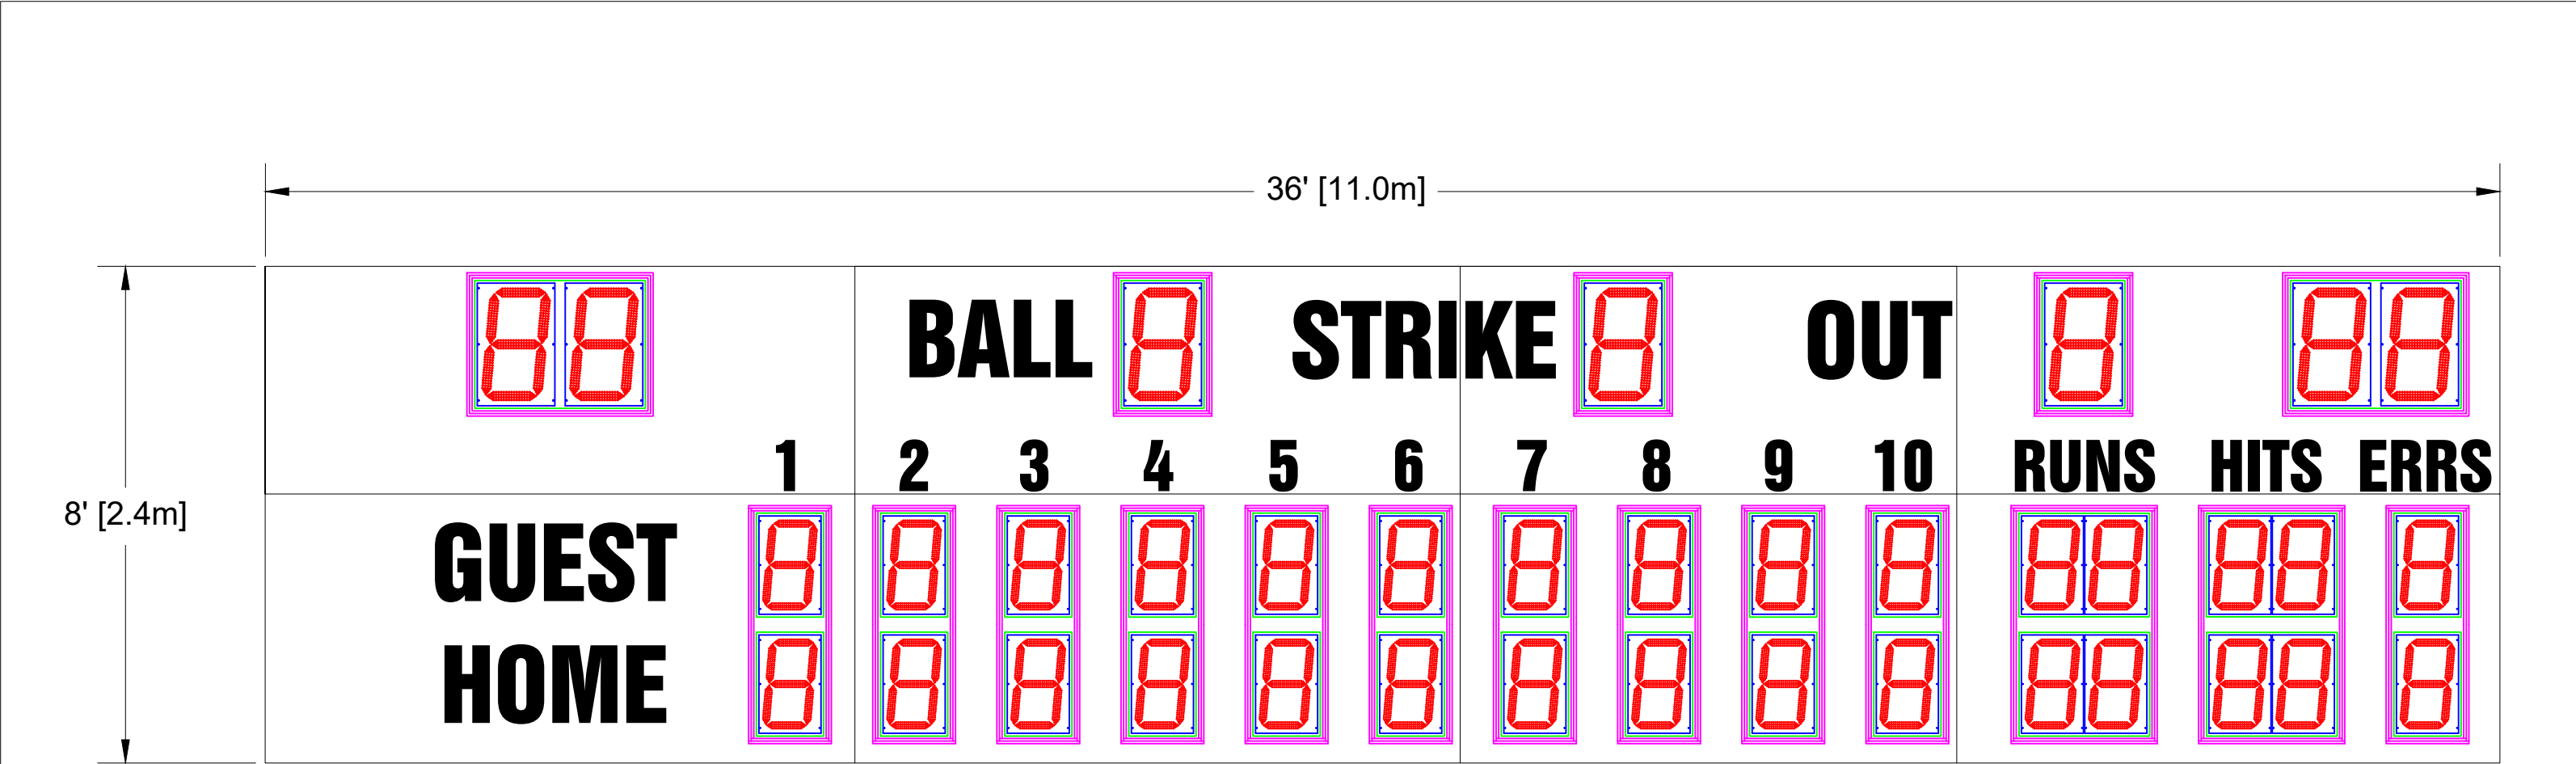

Scoreboard Specifications

Overall size: 36' (W) x 8' (H) x 6" (D)
Approximate Weight: 1533 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 8th Inning Digit.

22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, TIMER
17" LED Digits for INNINGS, RUNS, HITS, ERRS

15" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME
10" White Vinyl Lettering for INNINGS, RUNS, HITS, ERRS

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/18/2021
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div> <div>THIRD ANGLE PROJECTIONS </div>		<div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div> <div>DESCRIPTION OES ELECTRONIC SCOREBOARDS M7136AxCV-TM</div>	
SIZE B	FILENAME M7136AUXV-TM USAGE USE FOR REVIEW	INIT DRAWING DATE 3/18/21	REV A
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	