

Overall size: 36' (W) x 8' (H) x 6" (D) Approximate Weight: 1475 lbs

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 8th Inning Digit.

22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, AT BAT

17" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT

15" Electronic Team Names at 8 CH

15" White Vinyl Lettering for BALL, STRIKE, OUT

10" White Vinyl Lettering for INNINGS, RUNS, HITS, PC, AT BAT

This Layout is for internal reference only.

All LED digits include the following:

- Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle



$\frac{\text{NOTICE TO PERSON RECEIVING THIS DRAWING AND}}{\text{\underline{TECHNICAL INFORMATION:}}}$

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES,

TOLERANCE INFORMATION Dimensions are in Inches


Fractional \pm 1/16" Two Place Decimals \pm 0.02" Three Place Decimals \pm 0.005" Four Place Decimals \pm 0.0005" Angular ± 30'

THIRD ANGLE

OES ELECTRONIC SCOREBOARDS

M7136BxCE-AB

SIZE FILENAME INIT DRAWING DATE REV M7136BUXE-AB 3/28/21 В USAGE **USE FOR REVIEW** DRAW CATHOMPSON PAGE 1 OF 1 SCALE NTS

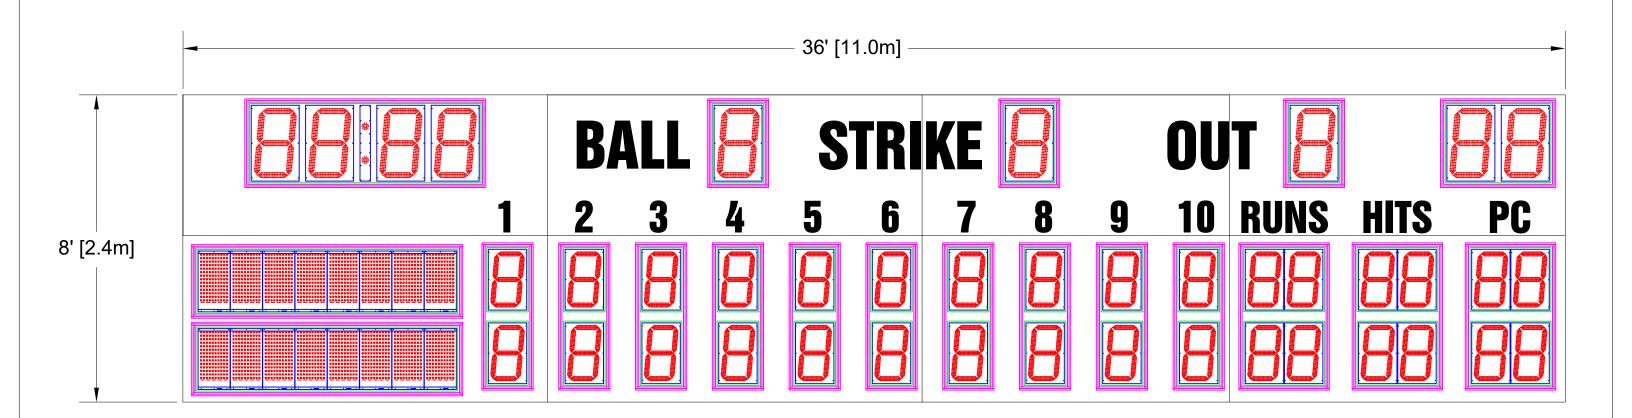

Overall size: 36' (W) x 8' (H) x 6" (D) Approximate Weight: 1496 lbs

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 8th Inning Digit.

22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, TIME 17" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT 15" electronic Team Names at 8 CH

15" White Vinyl Lettering for BALL, STRIKE, OUT

10" White Vinyl Lettering for INNINGS, RUNS, HITS, PC

This Layout is for internal reference only.

All LED digits include the following:

- Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle



 $\frac{\text{NOTICE TO PERSON RECEIVING THIS DRAWING AND}}{\text{\underline{TECHNICAL INFORMATION:}}}$

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES,

TOLERANCE INFORMATION Dimensions are in Inches


Fractional \pm 1/16" Two Place Decimals \pm 0.02" Three Place Decimals \pm 0.005" Four Place Decimals \pm 0.0005" Angular ± 30'

THIRD ANGLE

OES ELECTRONIC SCOREBOARDS M7136BxCE-CL

SIZE FILENAME INIT DRAWING DATE REV M7136BUXE-CL 12/9/21 В USAGE **USE FOR REVIEW**

DRAW CATHOMPSON PAGE 1 OF 1 SCALE NTS

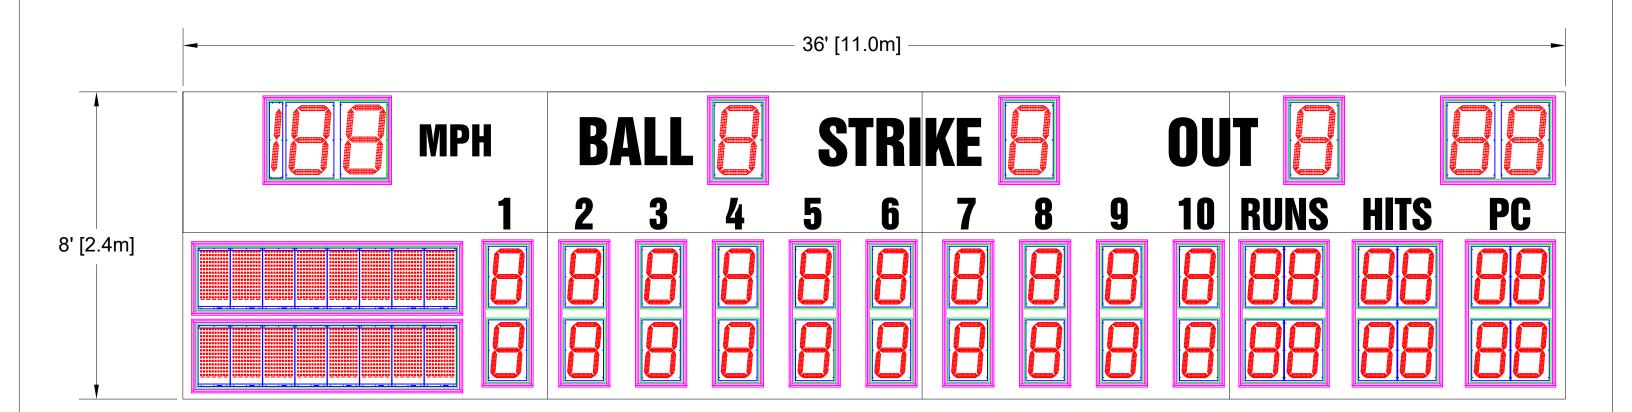

Overall size: 36' (W) x 8' (H) x 6" (D) Approximate Weight: 1478 lbs

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 8th Inning Digit.

22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, MPH 17" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT 15" Electronic Team Names at 8 CH

15" White Vinyl Lettering for BALL, STRIKE, OUT 10" White Vinyl Lettering for INNINGS, RUNS, HITS, PC, MPH

This Layout is for internal reference only.

All LED digits include the following:

- Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle



 $\frac{\text{NOTICE TO PERSON RECEIVING THIS DRAWING AND}}{\text{\underline{TECHNICAL INFORMATION:}}}$

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES,


TOLERANCE INFORMATION Dimensions are in Inches

Fractional \pm 1/16" Two Place Decimals \pm 0.02" Three Place Decimals \pm 0.005" Four Place Decimals \pm 0.0005" Angular ± 30'

THIRD ANGLE

OES ELECTRONIC SCOREBOARDS M7136BxCE-MP

SIZE FILENAME INIT DRAWING DATE REV M7136BUXE-MP 12/8/21 В USAGE **USE FOR REVIEW** DRAW CATHOMPSON PAGE 1 OF 1 SCALE NTS

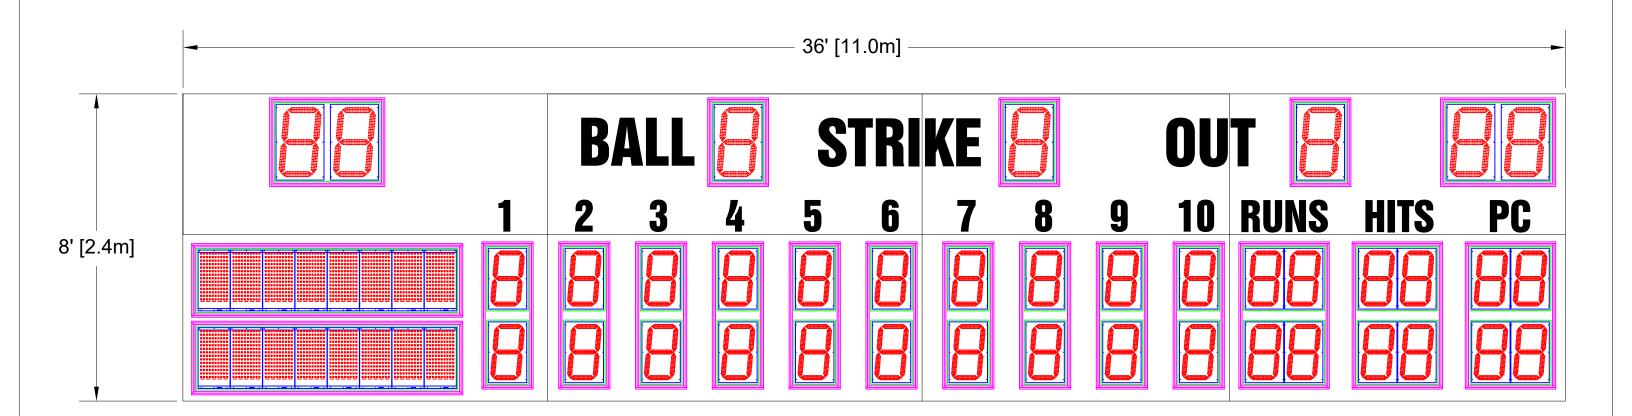

Overall size: 36' (W) x 8' (H) x 6" (D) Approximate Weight: 1475 lbs

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 8th Inning Digit.

22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, TIMER 17" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT

15" Electronic Team Names at 8 CH

15" White Vinyl Lettering for BALL, STRIKE, OUT

10" White Vinyl Lettering for INNINGS, RUNS, HITS, PC

This Layout is for internal reference only.

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle



NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETIARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES,

TOLERANCE INFORMATION Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30'

THIRD ANGLE PROJECTIONS

Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com


OES ELECTRONIC SCOREBOARDS
M7136RxCF-TM

M7136BxCE-TM

SIZE FILENAME INIT DRAWING DATE REV
M7136BUXE-TM 3/28/21

B USAGE USE FOR REVIEW

SCALE NTS DRAW GTHOMPSON PAGE 1 OF 1

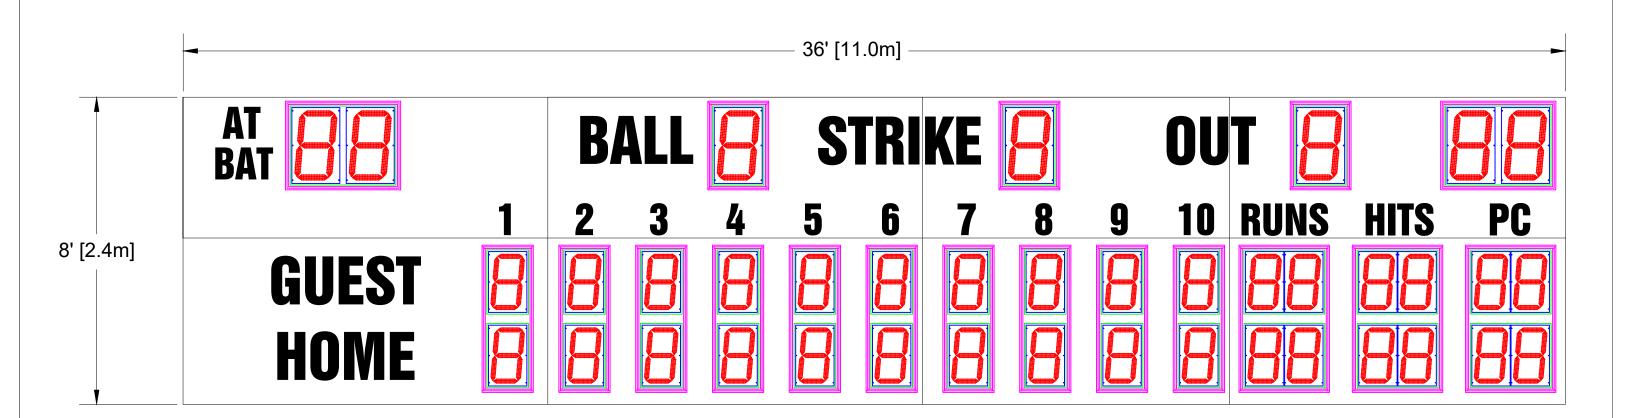

Overall size: 36' (W) x 8' (H) x 6" (D) Approximate Weight: 1533 lbs

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 8th Inning Digit.


22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, AT BAT 17" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT

15" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME 10" White Vinyl Lettering for INNINGS, RUNS, HITS, PC, AT BAT

This Layout is for internal reference only.

All LED digits include the following:


- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

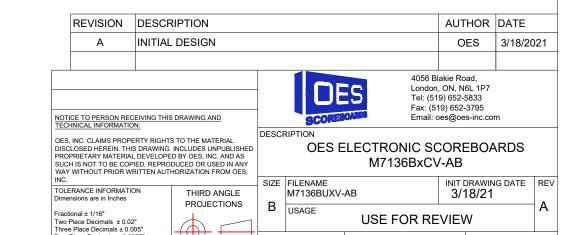

SCALE NTS

DRAW CGTHOMPSON PAGE 1 OF 1

Four Place Decimals ± 0.0005

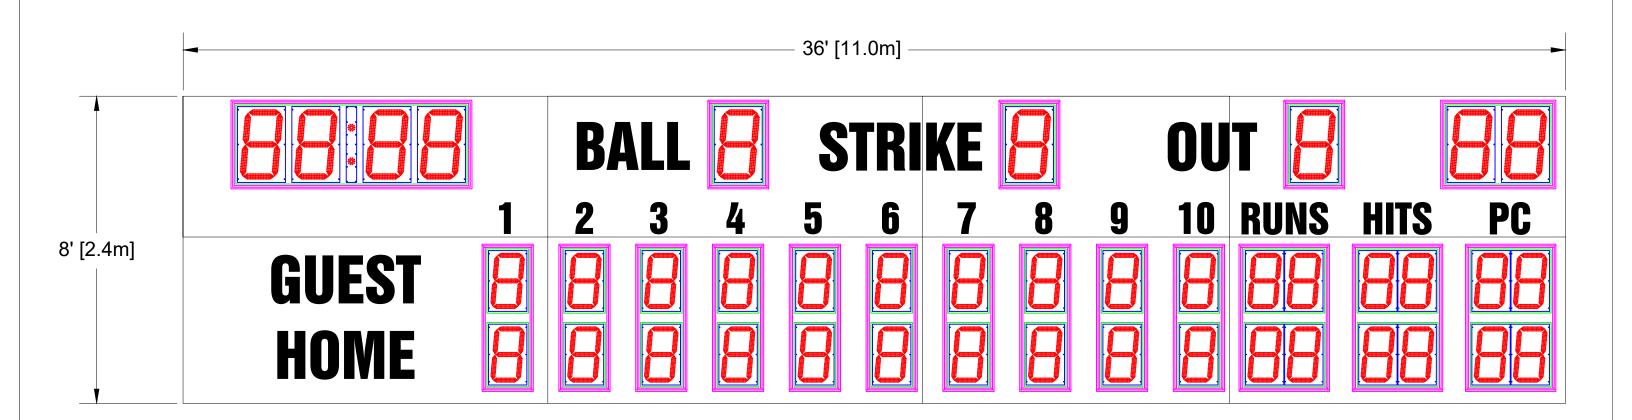

Overall size: 36' (W) x 8' (H) x 6" (D) Approximate Weight: 1533 lbs

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 8th Inning Digit.

22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, TIME 17" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT

15" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME

10" White Vinyl Lettering for INNINGS, RUNS, HITS, PC

This Layout is for internal reference only. All LED digits include the following:

- Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle




OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES,

TOLERANCE INFORMATION Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005

THIRD ANGLE **PROJECTIONS** OES ELECTRONIC SCOREBOARDS M7136BxCV-CL

SIZE FILENAME INIT DRAWING DATE REV 3/18/21 В USAGE **USE FOR REVIEW** DRAW CGTHOMPSON PAGE 1 OF 1 SCALE NTS

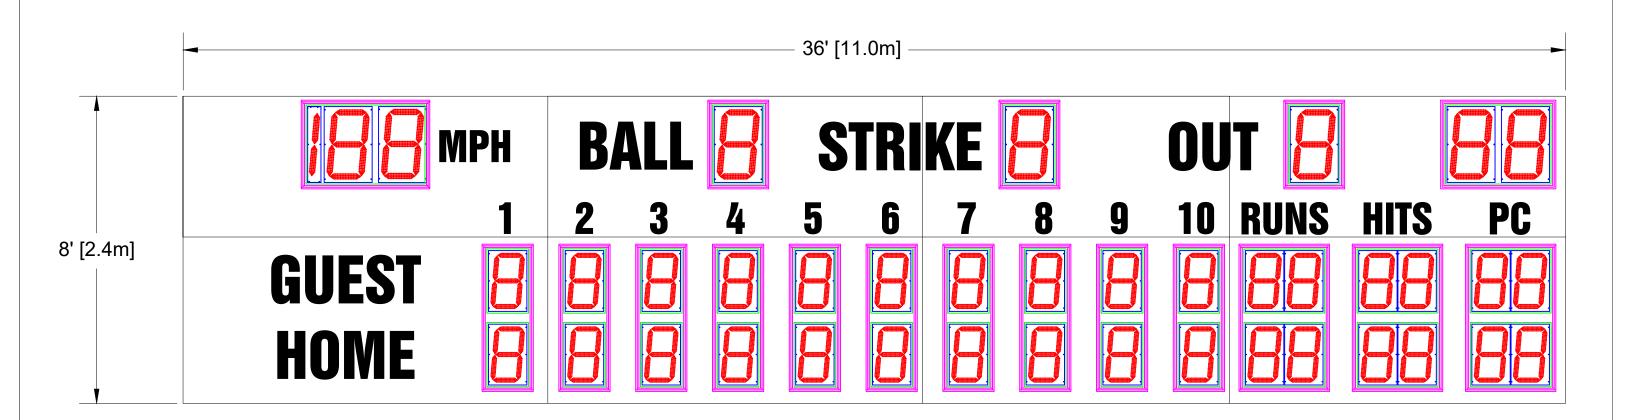

Overall size: 36' (W) x 8' (H) x 6" (D) Approximate Weight: 1533 lbs

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 8th Inning Digit.


22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, MPH 17" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT

15" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME 10" White Vinyl Lettering for INNINGS, RUNS, HITS, PC, MPH

This Layout is for internal reference only.

All LED digits include the following:


- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

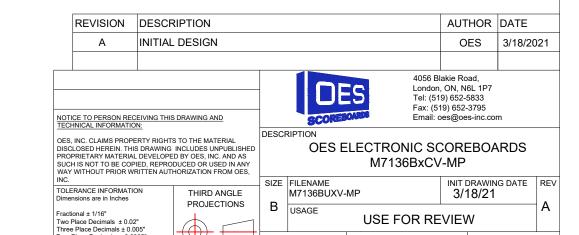

SCALE NTS

DRAW CGTHOMPSON PAGE 1 OF 1

Four Place Decimals ± 0.0005

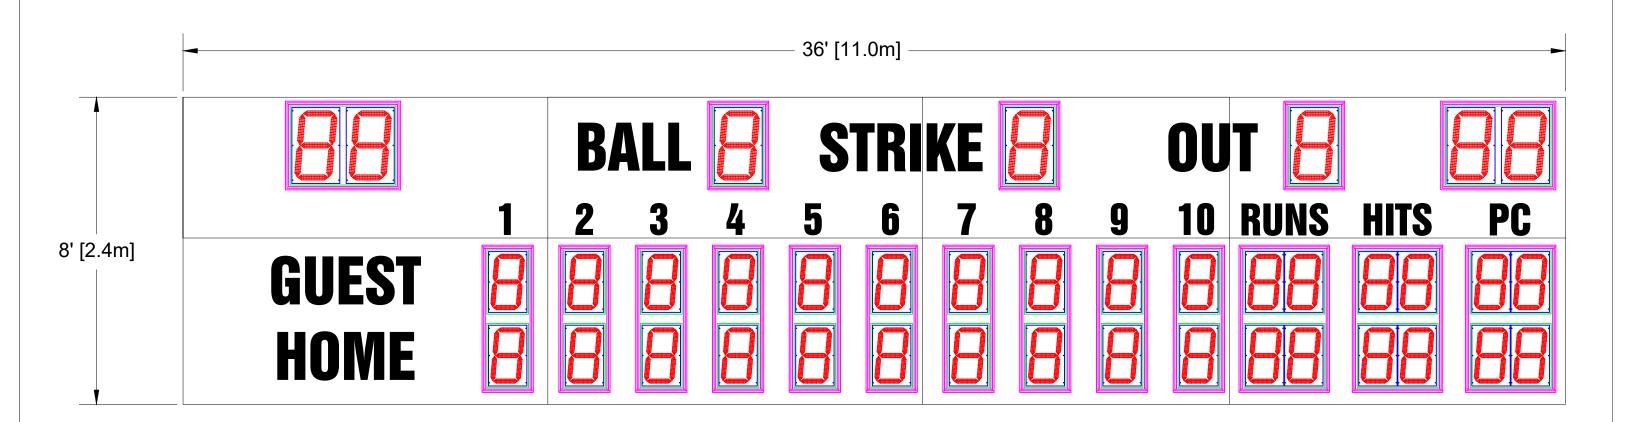

Overall size: 36' (W) x 8' (H) x 6" (D) Approximate Weight: 1533 lbs

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the 8th Inning Digit.

22" LED Digits for BALL, STRIKE, OUT, LAST PLAY, TIMER 17" LED Digits for INNINGS, RUNS, HITS, PITCH COUNT

15" White Vinyl Lettering for BALL, STRIKE, OUT, GUEST, HOME 10" White Vinyl Lettering for INNINGS, RUNS, HITS, PC

This Layout is for internal reference only.

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle



NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES,

TOLERANCE INFORMATION Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"

THIRD ANGLE PROJECTIONS

OES ELECTRONIC SCOREBOARDS M7136BxCV-TM

Tel: (519) 652-5833 Fax: (519) 652-3795

Email: oes@oes-inc.com

SIZE FILENAME M7136BUXV-TM 3/18/21 REV

B USE FOR REVIEW

SCALE NTS DRAWGGTHOMPSON PAGE 1 OF 1