

Scoreboard Specifications

Overall size: 18' (W) x 8' (H) x 6" (D)
Approximate Weight: 825 lbs

22" LED Digits for **ALL**
2" LED DOTS

10" Electronic Team Names at **8 Ch**

9" White Vinyl Lettering for **SOG, HALF**
5" White Vinyl Lettering for **1ST HALF, 2ND HALF**

All LED digits include the following:



- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle


Electrical Specifications

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps.
Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the SOG Digit(s).

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/20/2023

		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
<p><small>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</small></p> <p>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</p>		DESCRIPTION OES ELECTRONIC SCOREBOARDS M4018AxCE	
SIZE A	FILENAME M4018AUXE	INIT DRAWING DATE 3/20/23	REV A
	USAGE USE FOR REVIEW		
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	

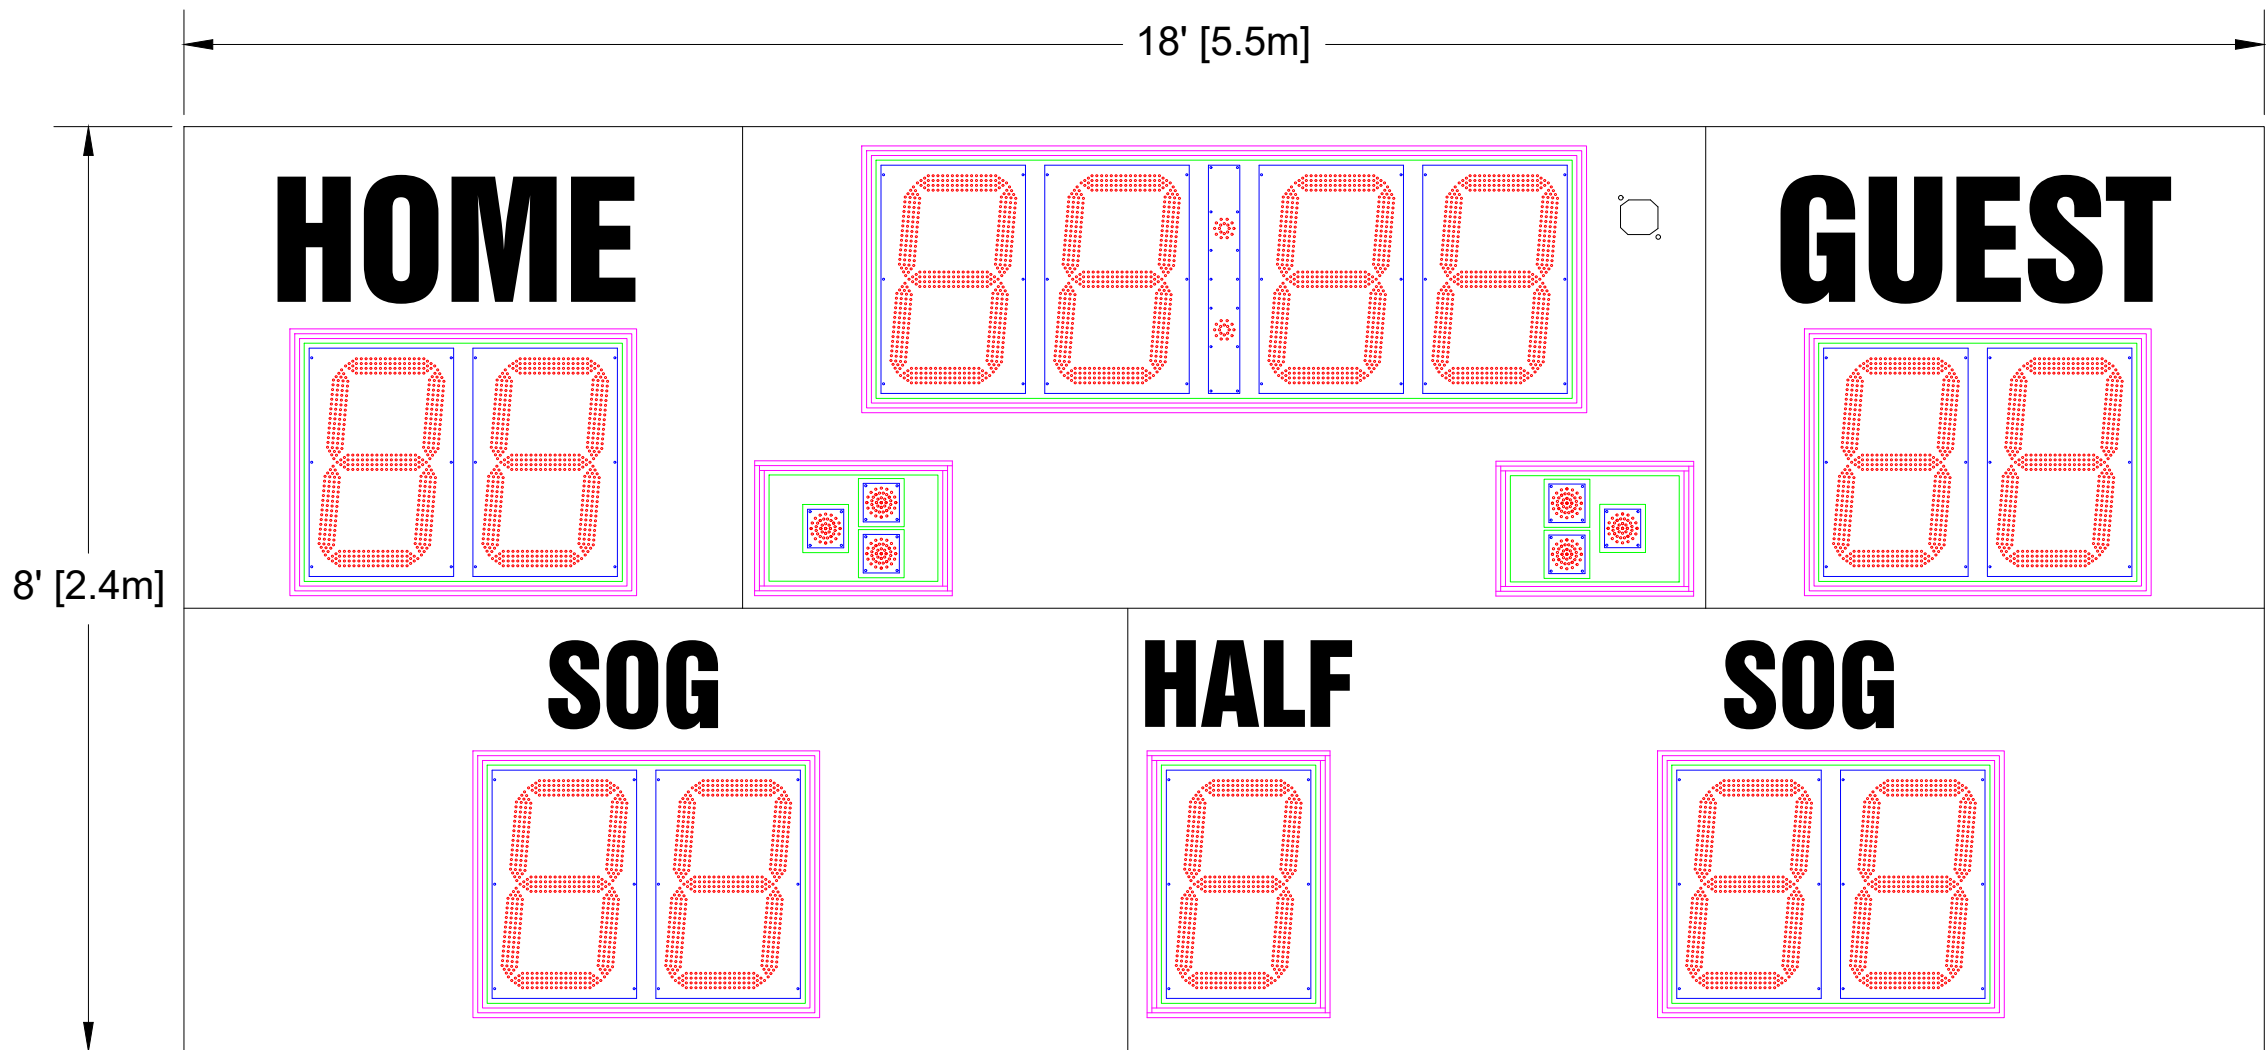

Scoreboard Specifications

Overall size: 18' (W) x 8' (H) x 6" (D)
Approximate Weight: 774 lbs

22" LED Digits for ALL
6" LED Arrows

13" White Vinyl Lettering for HOME, GUEST
9" White Vinyl Lettering for SOG, HALF

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

Electrical Specifications

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps.
Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the SOG Digit(s).

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/20/2023

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION
**OES ELECTRONIC SCOREBOARDS
M4018AxCV**

SIZE A	FILENAME M4018AUXV	INIT DRAWING DATE 3/20/23	REV A
USAGE USE FOR REVIEW			

SCALE **NTS** DRAWN BY **VPERUMAL** PAGE 1 OF 1