

Scoreboard Specifications

Overall size: 18' (W) x 8' (H) x 6" (D)

Approximate Weight: 844 lbs

22" LED Digits for ALL

2" LED DOTS

10" Electronic Team Names of **8 characters**

10" White Vinyl Lettering for **SHOTS, C. KICKS**

5" White Vinyl Lettering for **1ST HALF, 2ND HALF**

All LED digits include the following:



- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle


Electrical Specifications

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps.

Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the C. KICKS Digit

REVISION	DESCRIPTION	AUTHOR	DATE			
A	INITIAL DESIGN	OES	3/20/2023			
		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>				
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>						
<div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M4018BxCE</div>				
<div>THIRD ANGLE PROJECTIONS</div> 		SIZE	FILENAME M4018BUXE	INIT DRAWING DATE 3/20/23	REV	
		A	USAGE	USE FOR REVIEW		A
SCALE		NTS	DRAWN BY CGTHOMPSON	PAGE	1 OF 1	

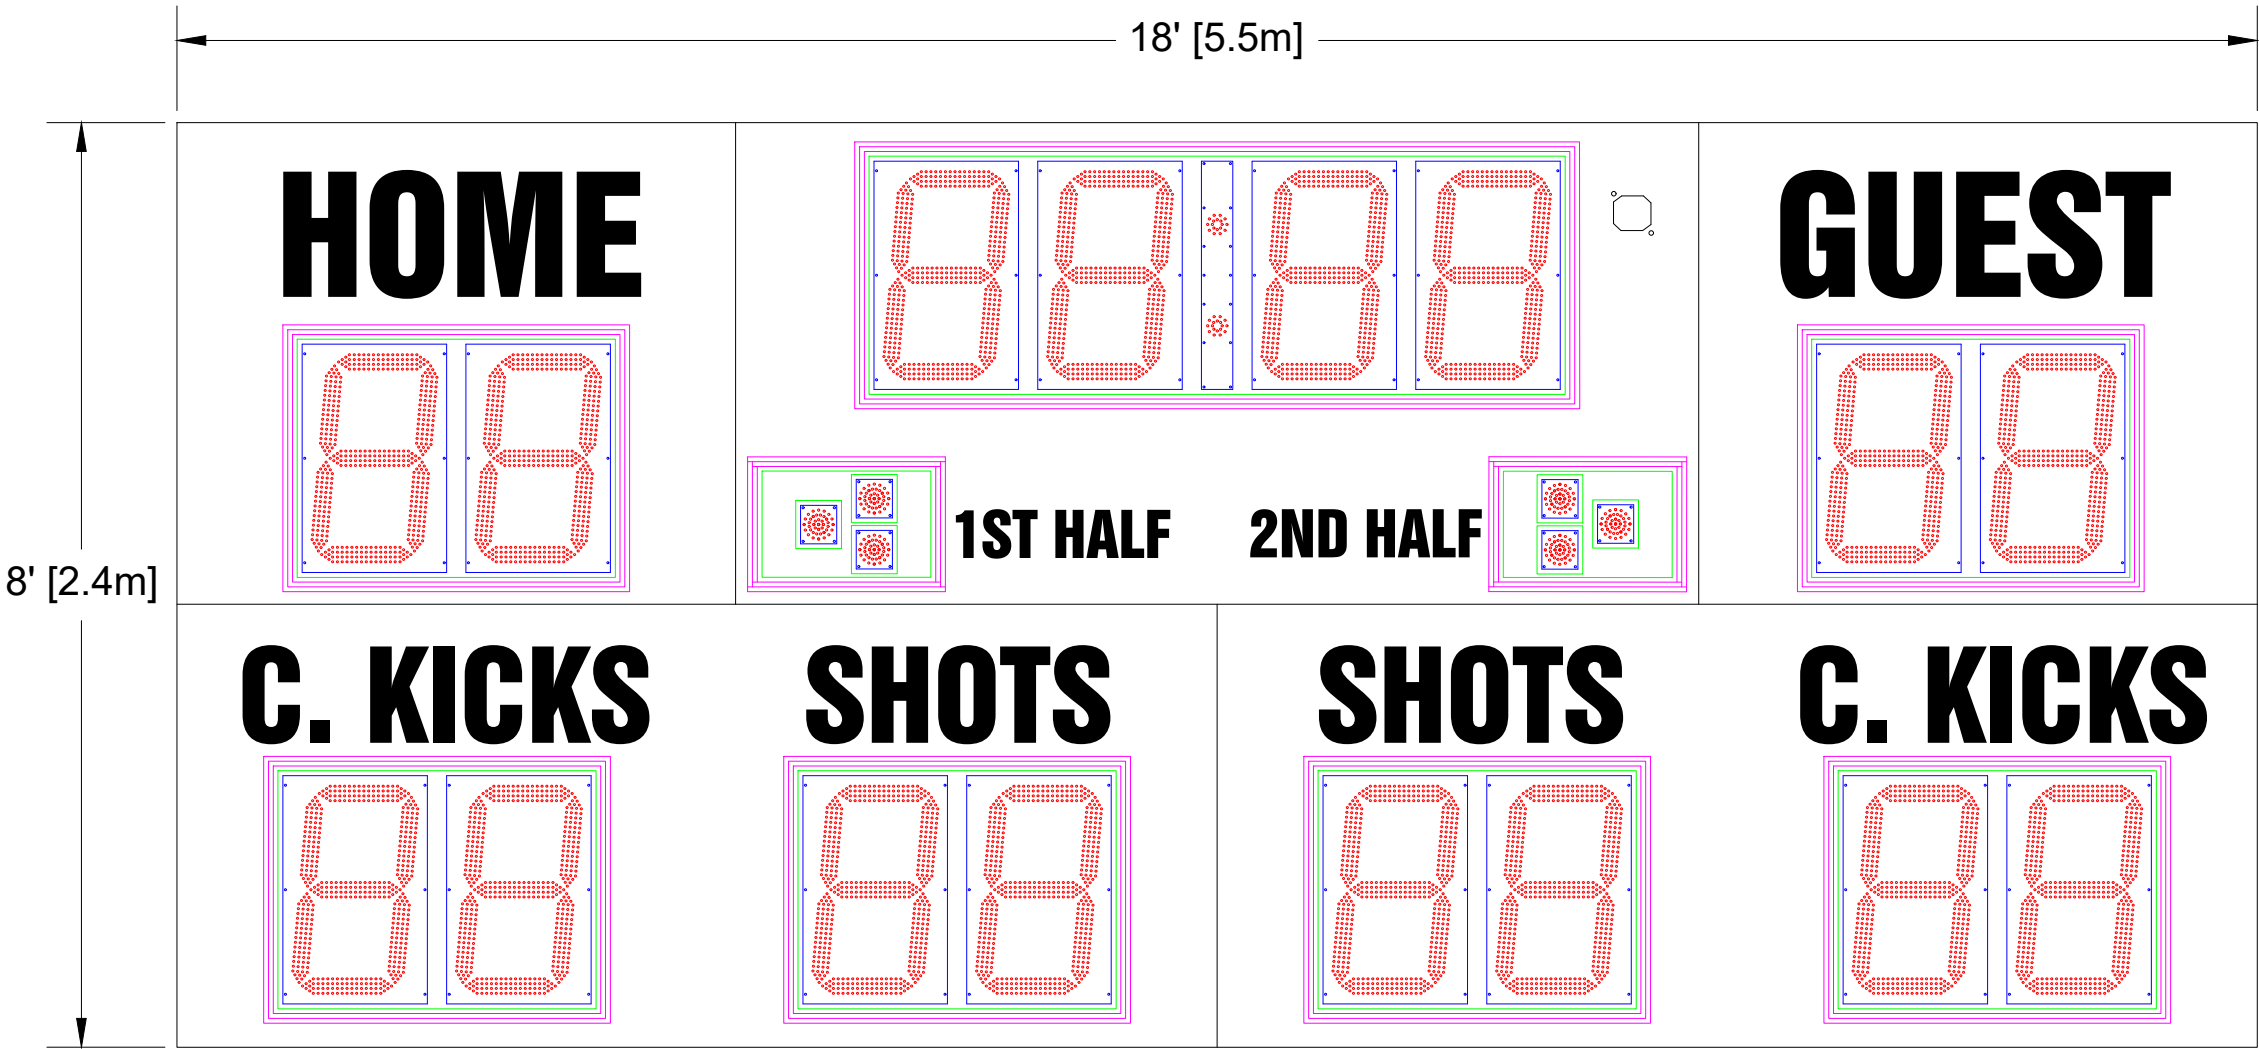

Scoreboard Specifications

Overall size: 18' (W) x 8' (H) x 6" (D)
Approximate Weight: 804 lbs

22" LED Digits for ALL
6" LED Arrows

13" White Vinyl Lettering for HOME, GUEST
10" White Vinyl Lettering for SHOTS, C. KICKS
5" White Vinyl Lettering for 1ST HALF, 2ND HALF

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

Electrical Specifications

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20
Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the C. KICKS Digit

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/20/2023
		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
		DESCRIPTION OES ELECTRONIC SCOREBOARDS M4018BxCV	
SIZE	FILENAME M4018BUXV	INIT DRAWING DATE 3/20/23	REV
A	USAGE USE FOR REVIEW		A
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
SCALE	NTS	DRAWN BY VPERUMAL	PAGE 1 OF 1