

Scoreboard Specifications

Overall size: 30' (W) x 4' (H) x 6" (D)
Approximate Weight: 700 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the TIME Digits.

17" LED Digits for TIME, SCORE
14" LED Digits for DOWN, TO GO, BALL ON, QTR, TOL


10" Electronic Team names at 8 Ch


8" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR, TOL


This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	9/6/2022

		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		DESCRIPTION OES ELECTRONIC SCOREBOARDS M8030AxCE	
SIZE	FILENAME M8030AXCE	INIT DRAWING DATE 9/6/22	REV
A	USAGE USE FOR REVIEW		A
SCALE NTS		DRAWN BY RDONALD	PAGE 1 OF 1

TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°	THIRD ANGLE PROJECTIONS 
--	---

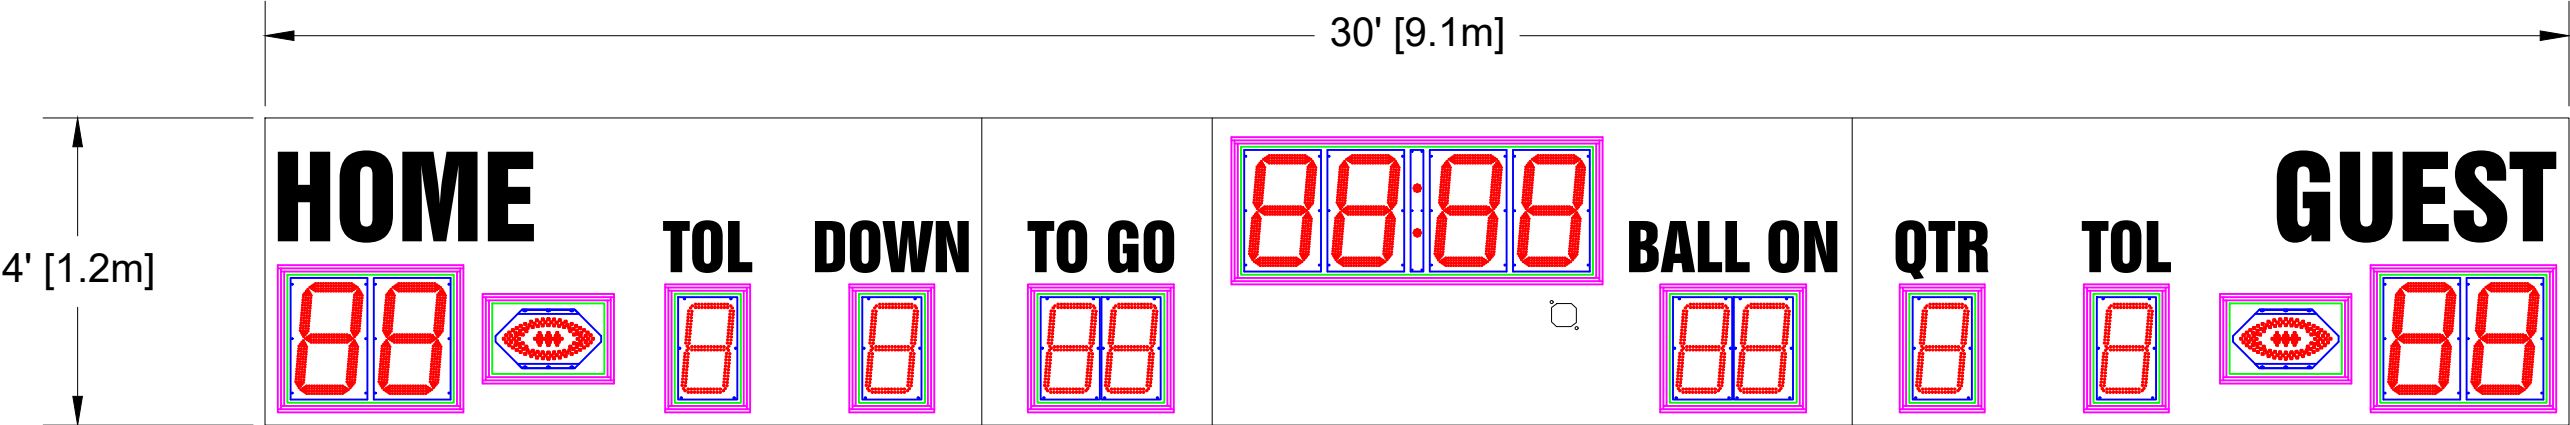

Scoreboard Specifications

Overall size: 30' (W) x 4' (H) x 6" (D)
Approximate Weight: 660 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the TIME Digits.

17" LED Digits for TIME, SCORE
14" LED Digits for DOWN, TO GO, BALL ON, QTR, TOL

14" White Vinyl Lettering for HOME, GUEST
8" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR, TOL

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	9/7/2022

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M8030AxCV			
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8030AXCV	9/7/22	A
	USAGE		
USE FOR REVIEW			

SCALE	NTS	DRAWN BY	RDONALD	PAGE	1 OF 1
-------	-----	----------	---------	------	--------