

Scoreboard Specifications
Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1038 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.

30" LED Digits for TOD
22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

10" Electronic Team Names at 8 CH

13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL


This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		THIRD ANGLE PROJECTIONS	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		DESCRIPTION OES ELECTRONIC SCOREBOARDS M8025CxCE	
SIZE A	FILENAME M8025CUXE USAGE USE FOR REVIEW	INIT DRAWING DATE 12/18/21	REV A
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1	OF 1

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

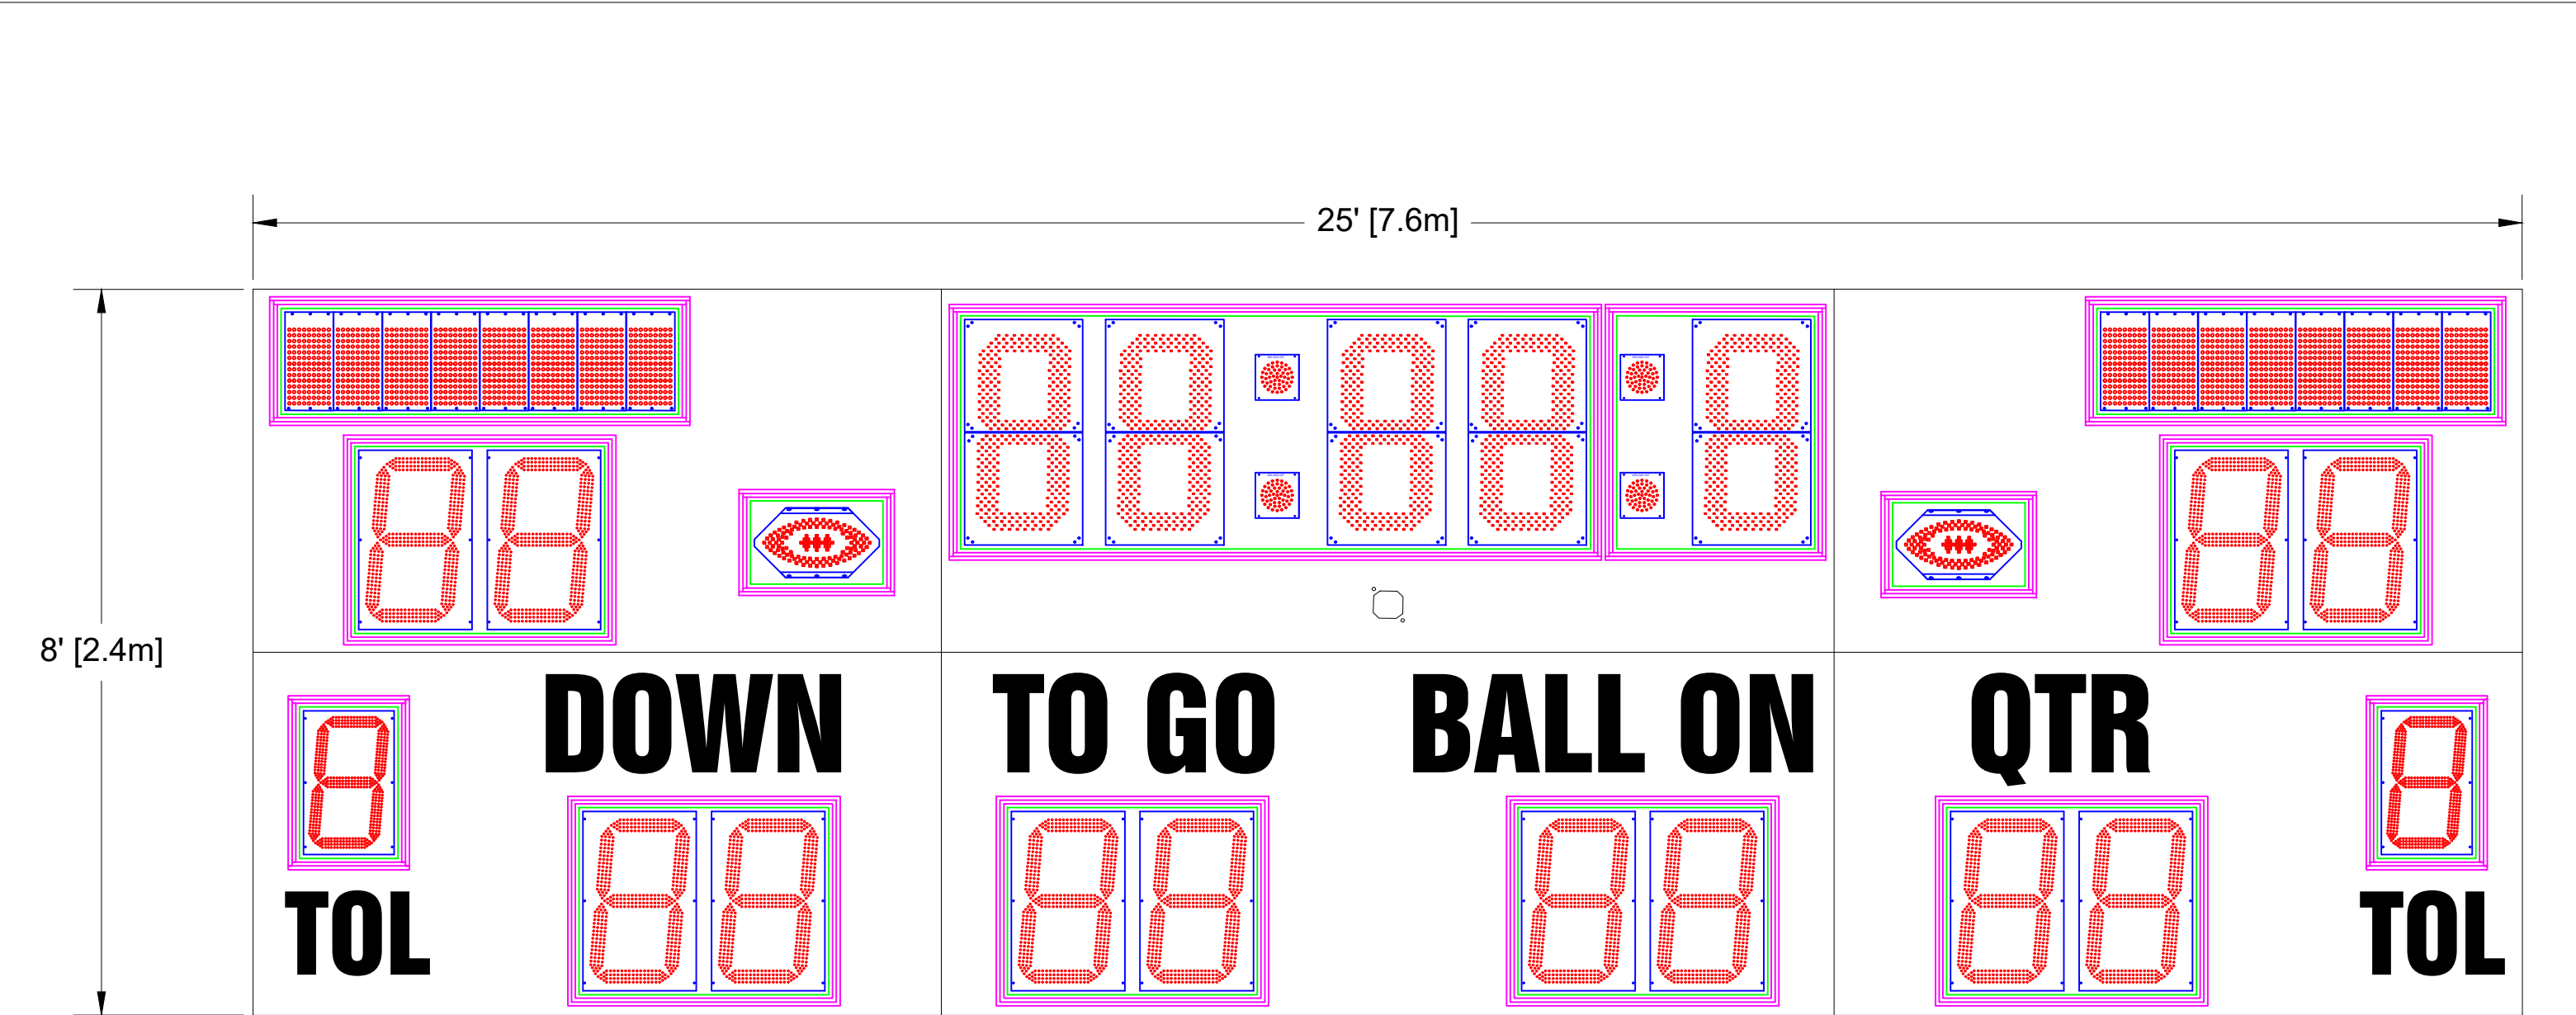

Scoreboard Specifications

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1093 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.



- 30" LED Digits for TOD
- 22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
- 17" LED Digits for TOL
- 10" Electronic Team Names at 8 CH


- 13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
- 11" White Vinyl Lettering for TOL

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/5/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
SIZE A	FILENAME M8025CUXE-TF USAGE	INIT DRAWING DATE 5/5/21	REV A
SCALE NTS		DRAWN BY CGTHOMPSON	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8025CxCE-TF		USE FOR REVIEW	
PAGE 1 OF 1			

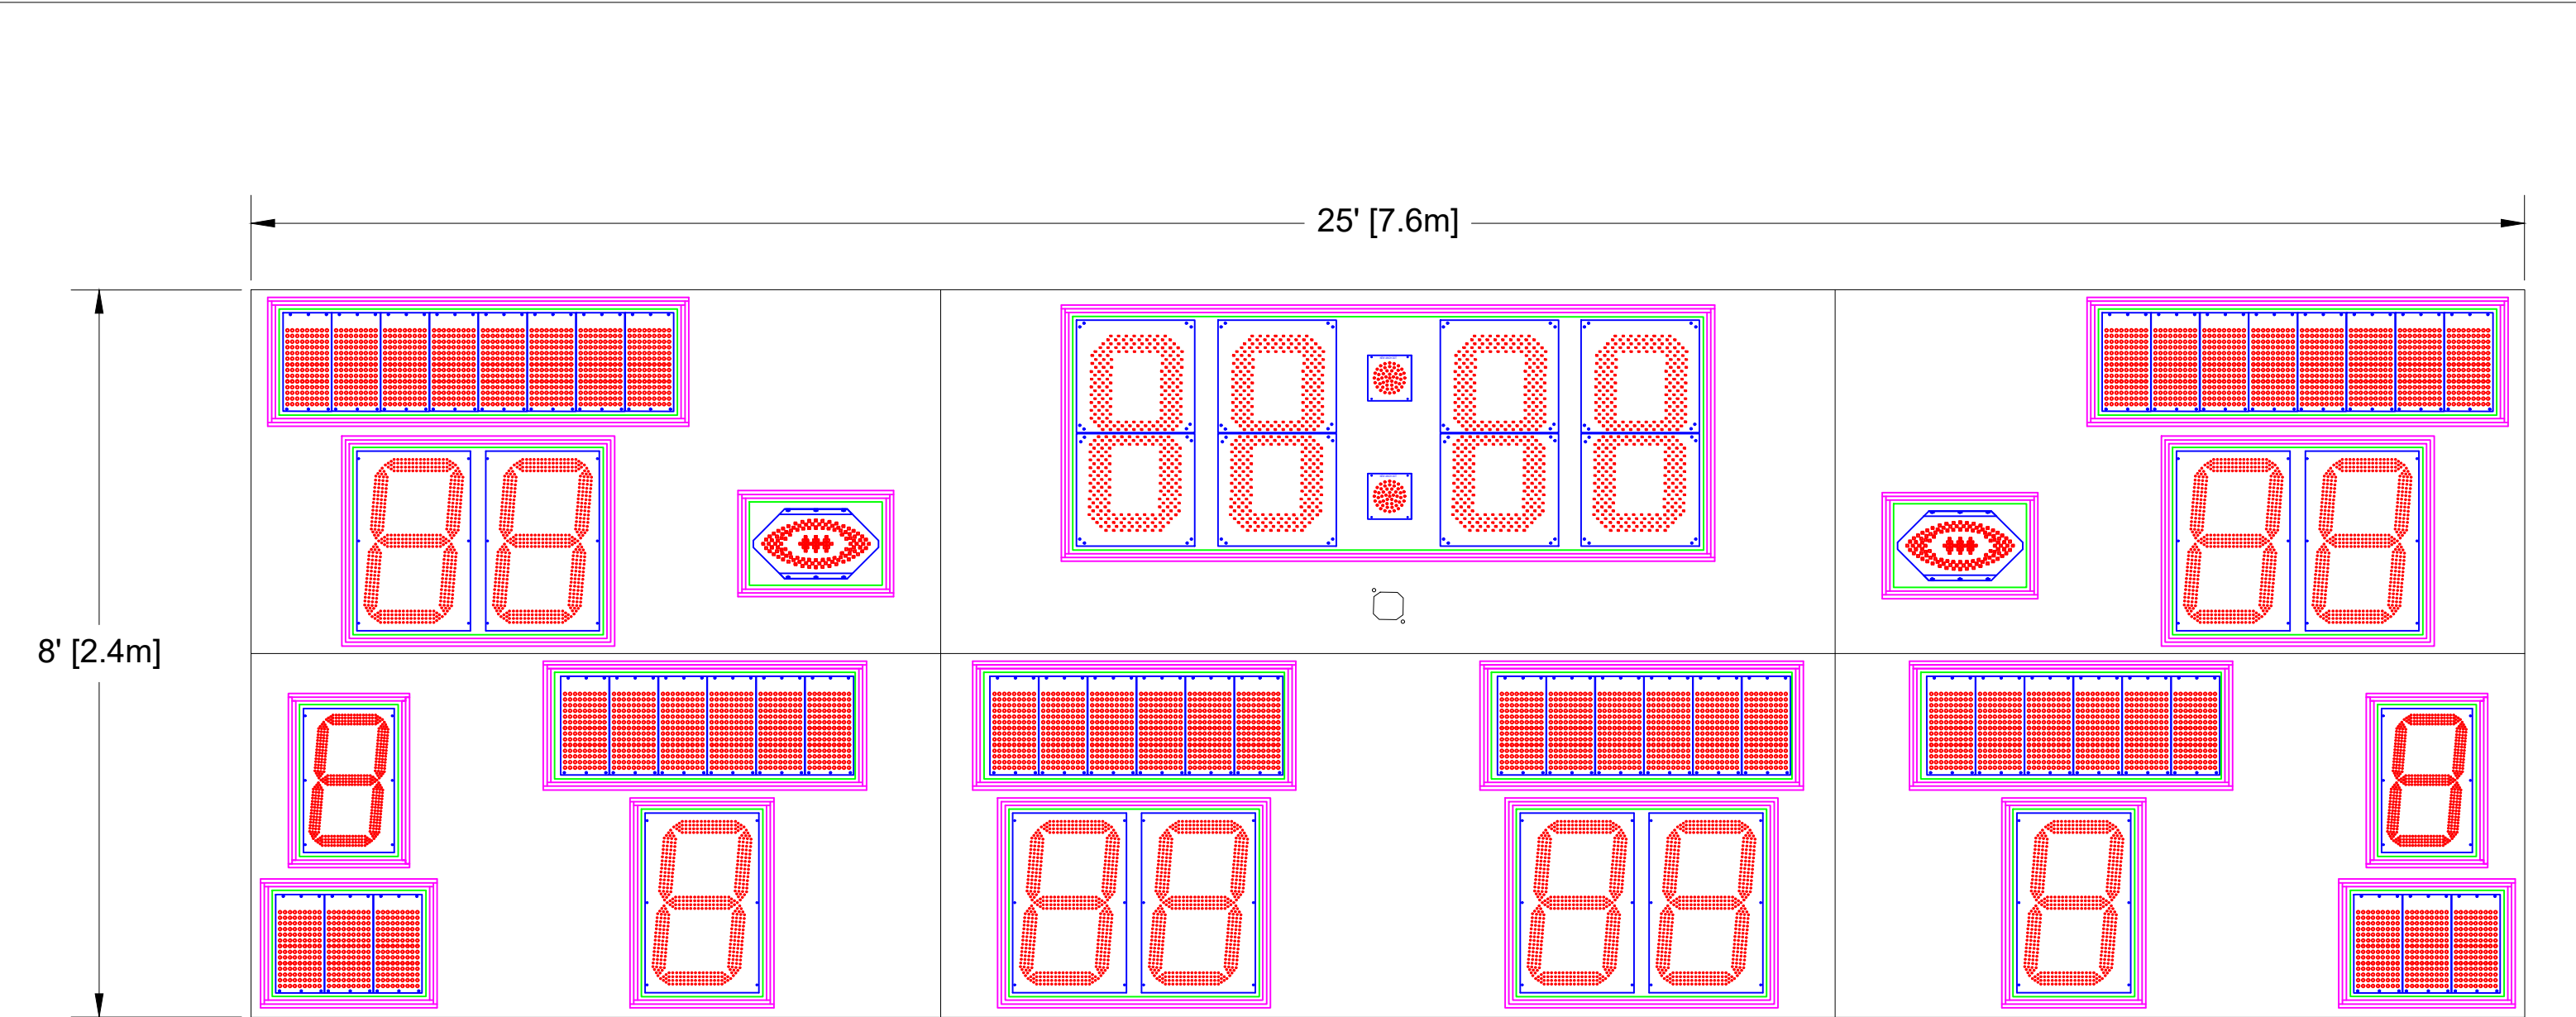

Scoreboard Specifications

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1123 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.


- 30" LED Digits for TOD
- 22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
- 17" LED Digits for TOL
- 10" Electronic Team names at 8 Ch
- 10" Electronic Captions at 6 Ch
- 10" Electronic Captions at 3 Ch

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		THIRD ANGLE PROJECTIONS	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		DESCRIPTION OES ELECTRONIC SCOREBOARDS M8025CxCH	
SIZE A	FILENAME M8025CUXH	INIT DRAWING DATE 12/18/21	REV A
USAGE USE FOR REVIEW			
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	

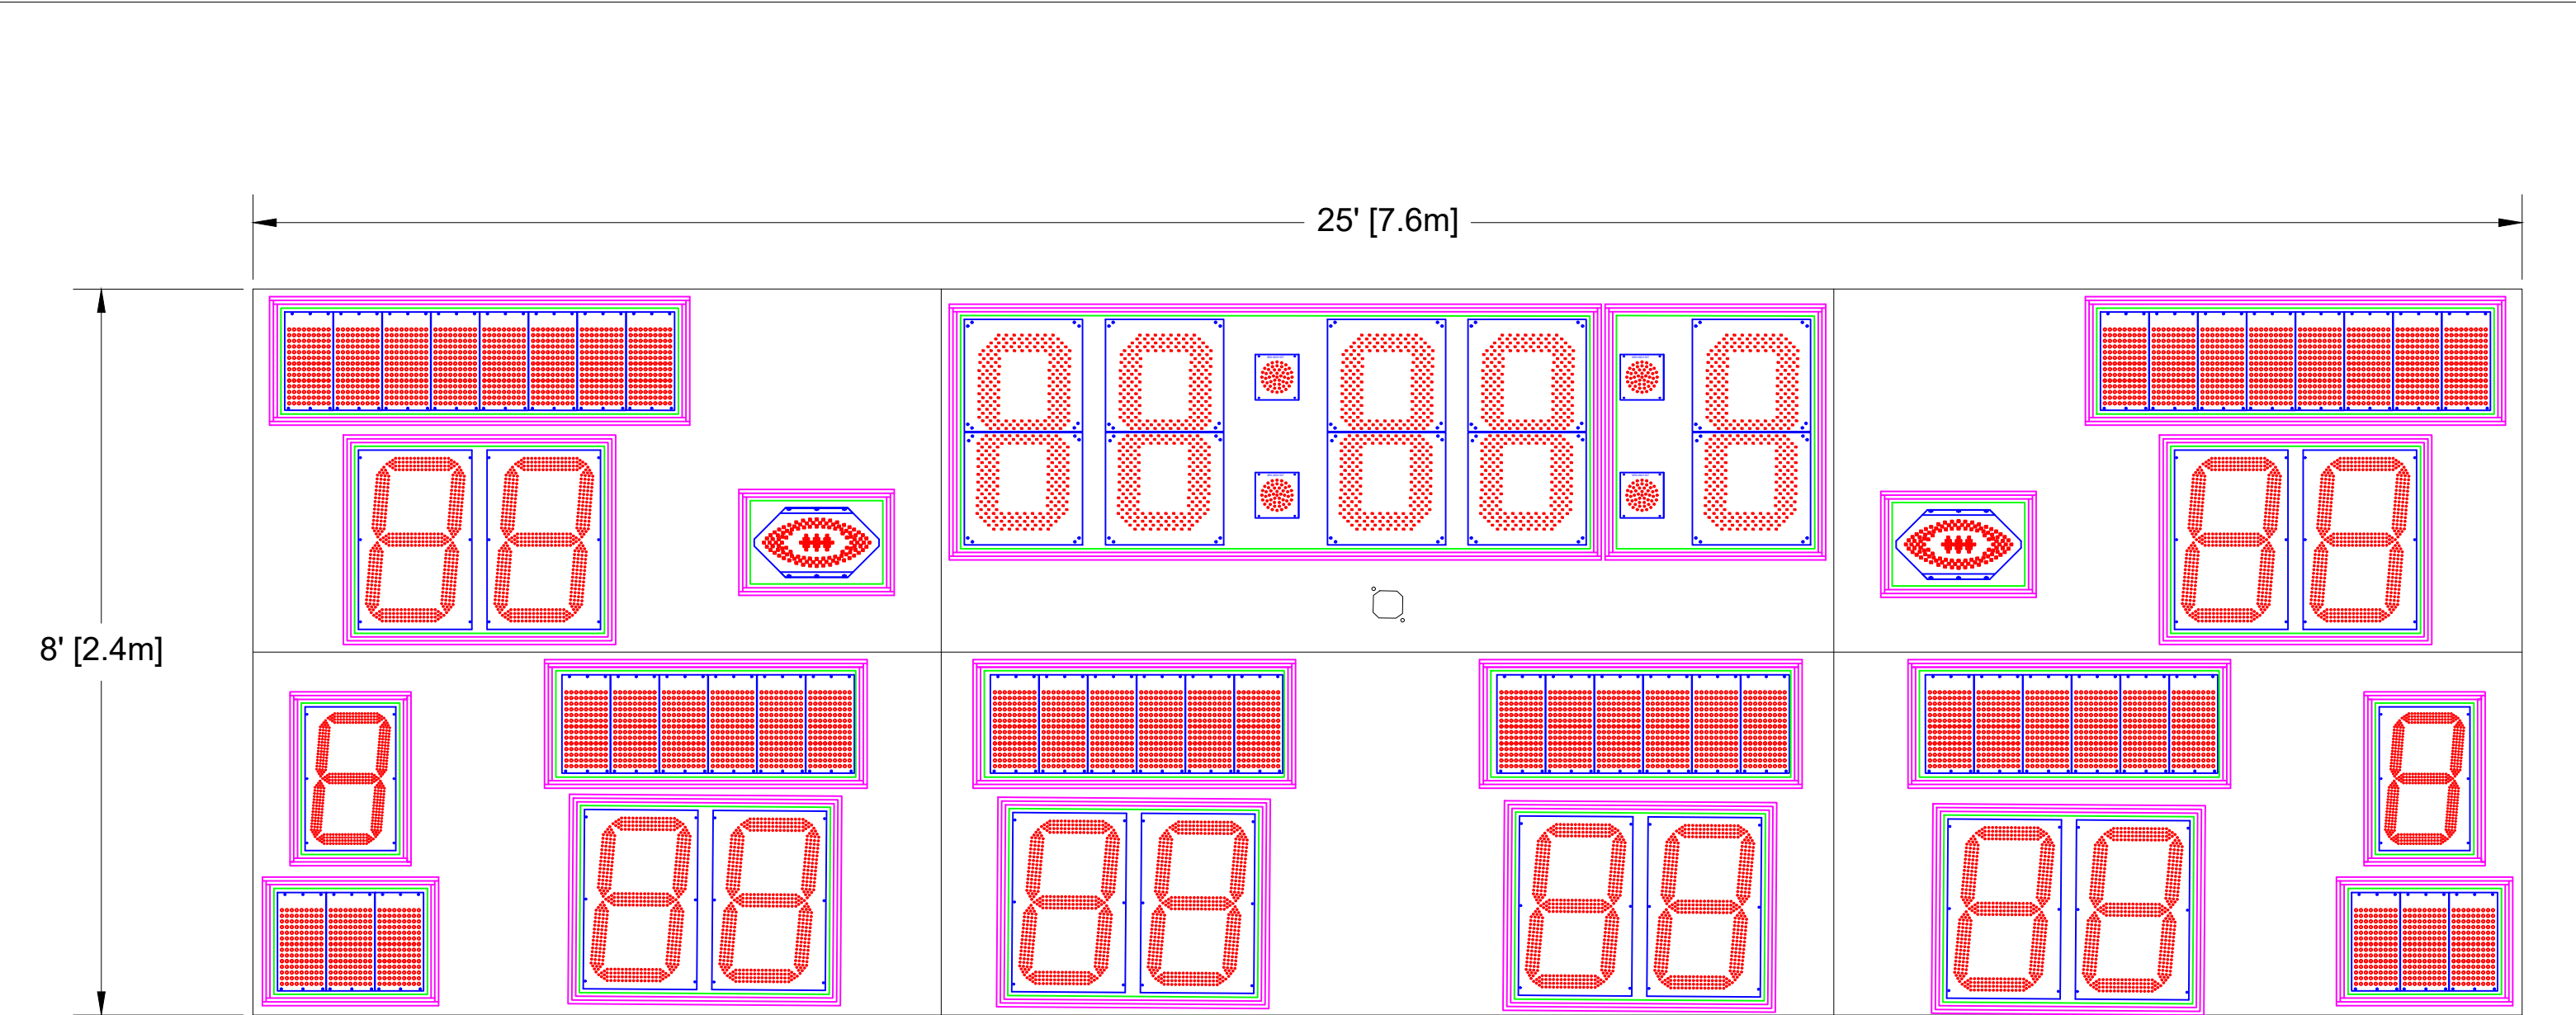

Scoreboard Specifications

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1172 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.

- 30" LED Digits for TOD
- 22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
- 17" LED Digits for TOL
- 10" Electronic Team names at 8 Ch
- 10" Electronic Captions at 6 Ch
- 10" Electronic Captions at 3 Ch

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.


TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M8025CxCH-TF			
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8025CUXH-TF	12/18/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE
		CGTHOMPSON	1 OF 1

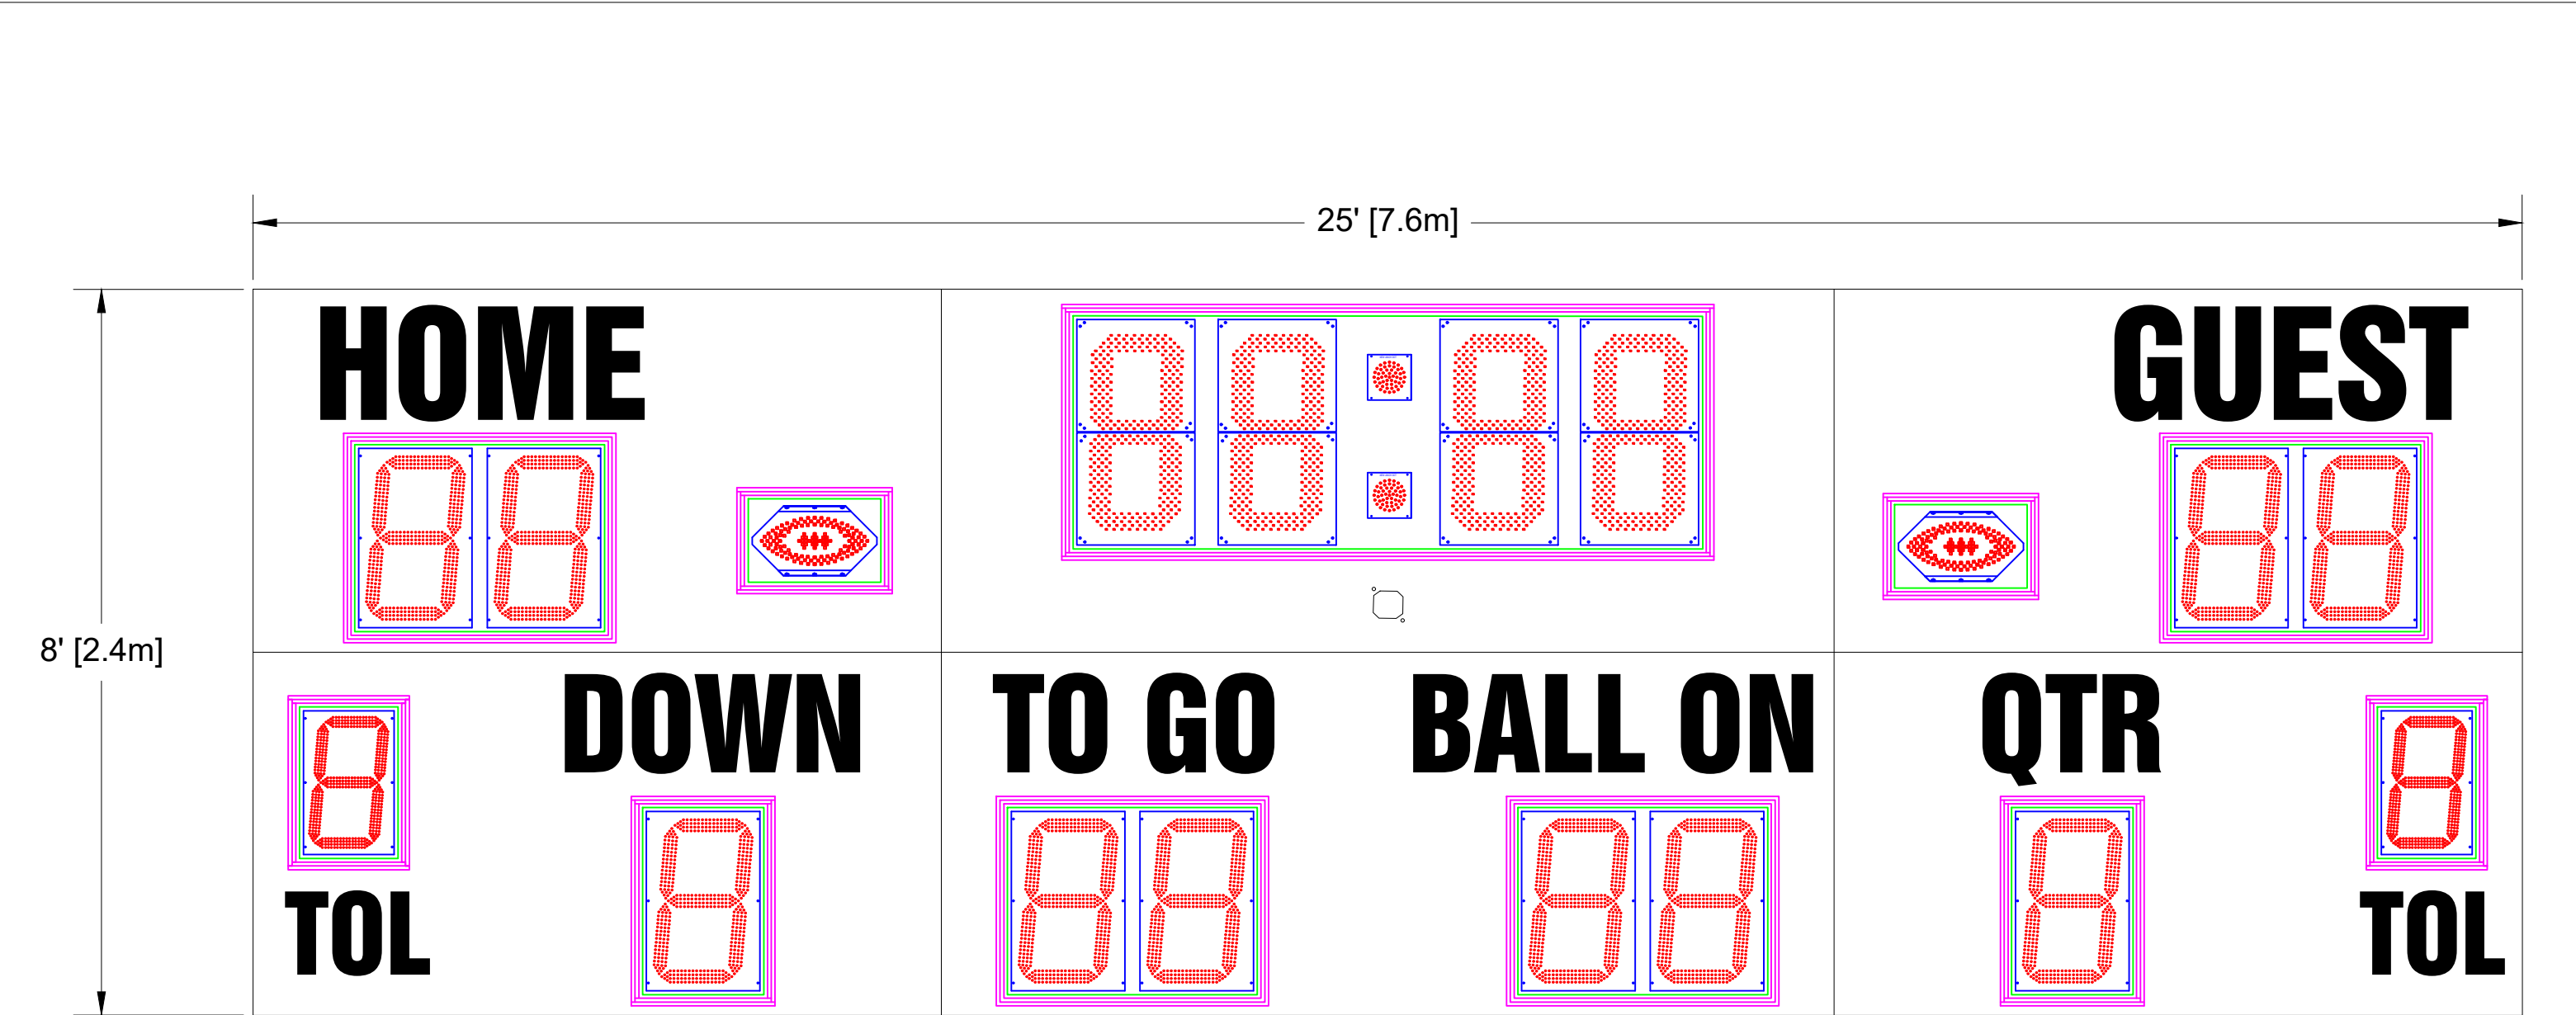

Scoreboard Specifications

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1001 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.

30" LED Digits for TOD
22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL


15" White Vinyl Lettering for HOME, GUEST
13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
SIZE A	FILENAME M8025CUXV USAGE	INIT DRAWING DATE 12/18/21	REV A
SCALE NTS		DRAWN BY CGTHOMPSON	
		PAGE 1 OF 1	

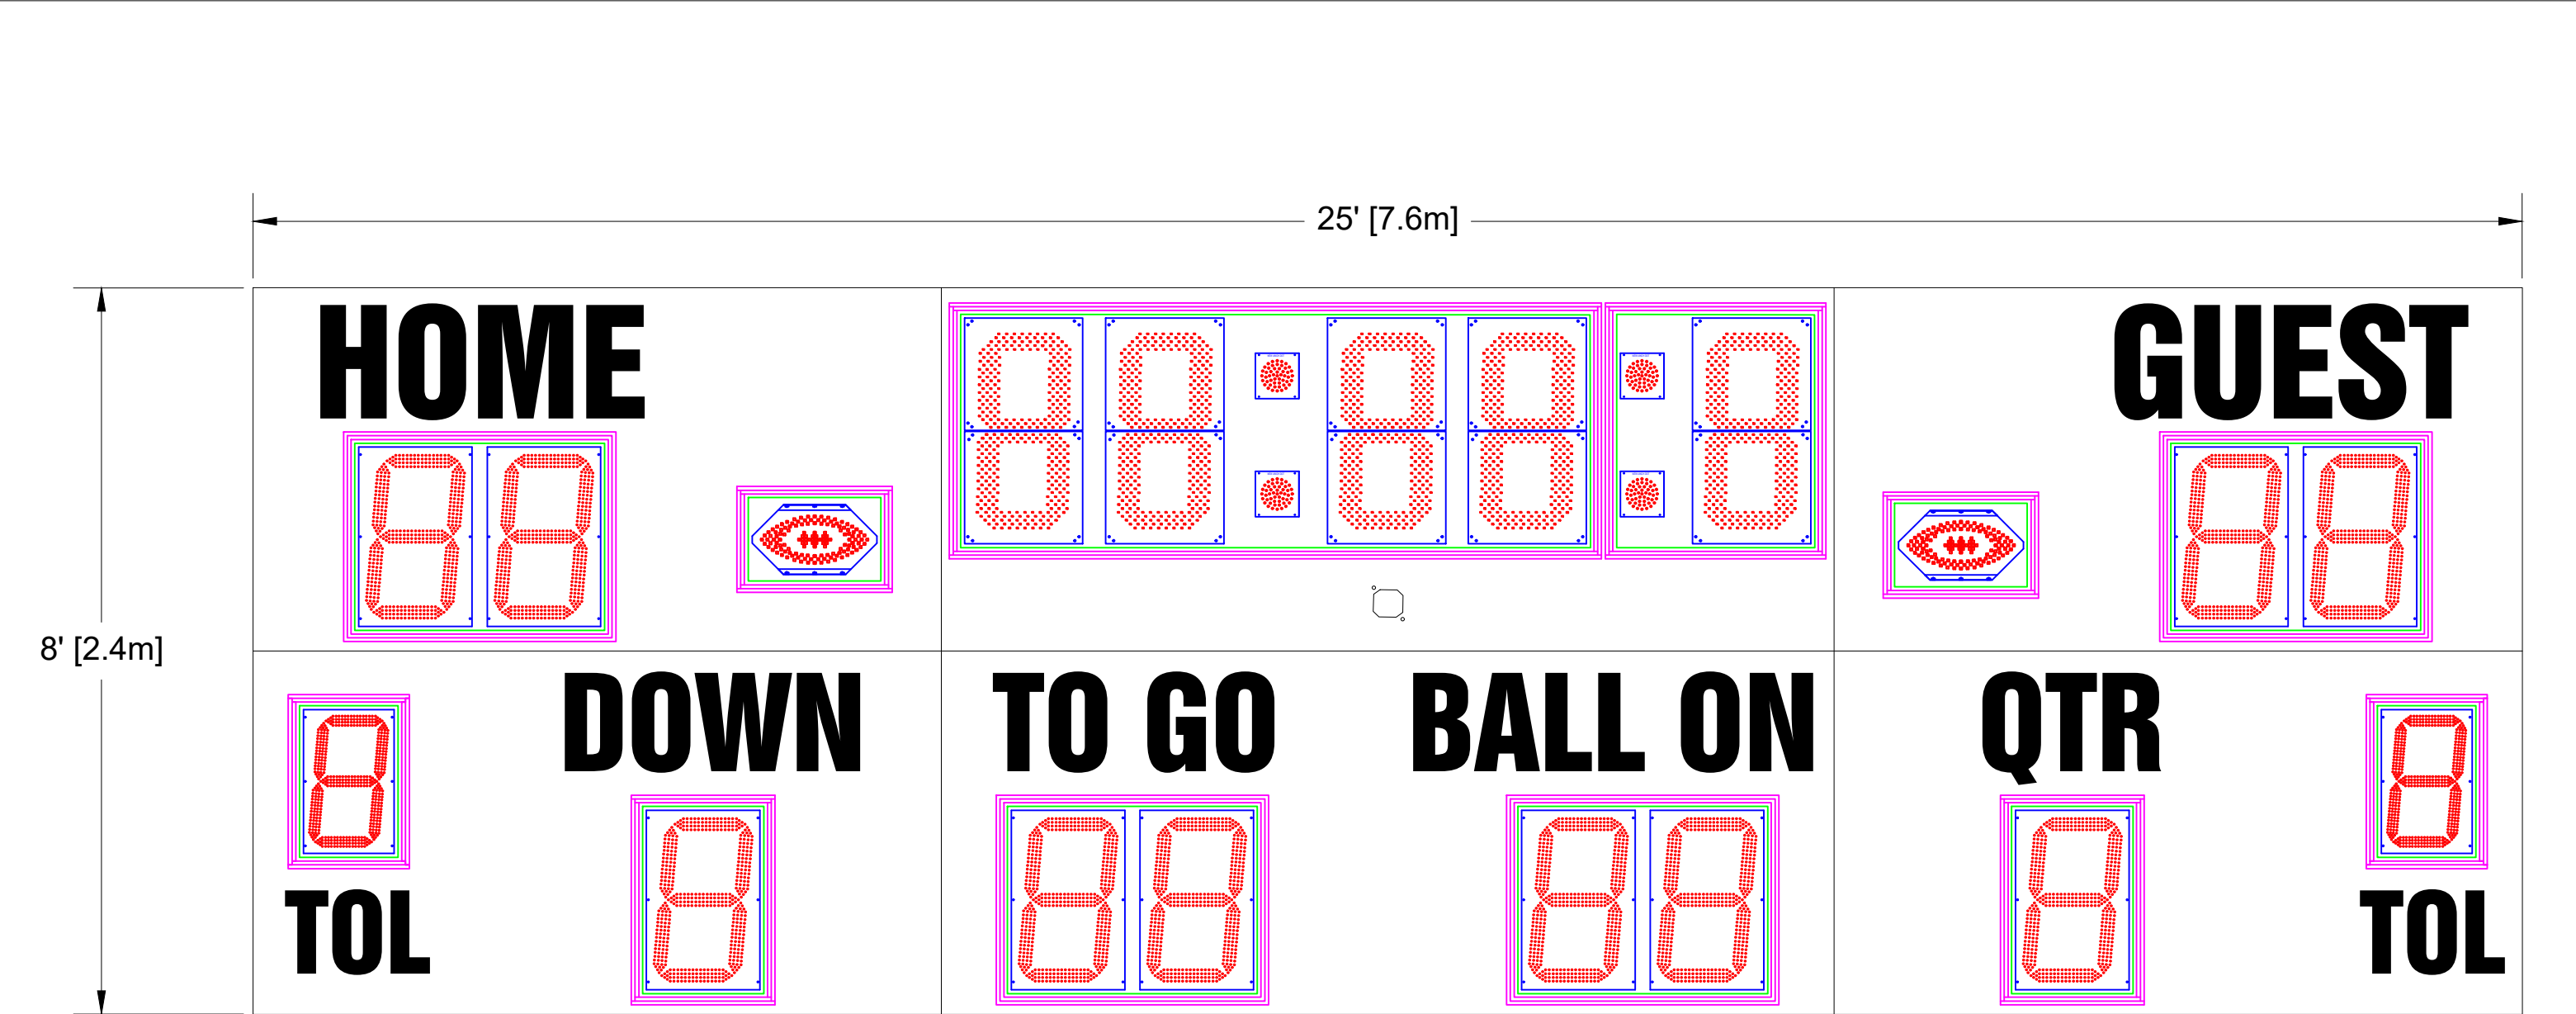

Scoreboard Specifications

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1038 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the BALL ON Digit.

30" LED Digits for TOD
22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

15" White Vinyl Lettering for HOME, GUEST
13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:			
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.			
TOLERANCE INFORMATION Dimensions are in Inches			
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°			
THIRD ANGLE PROJECTIONS			
DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M8025CxCV-T			
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8025CUXV-T	12/18/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE
CGTHOMPSON		1 OF 1	

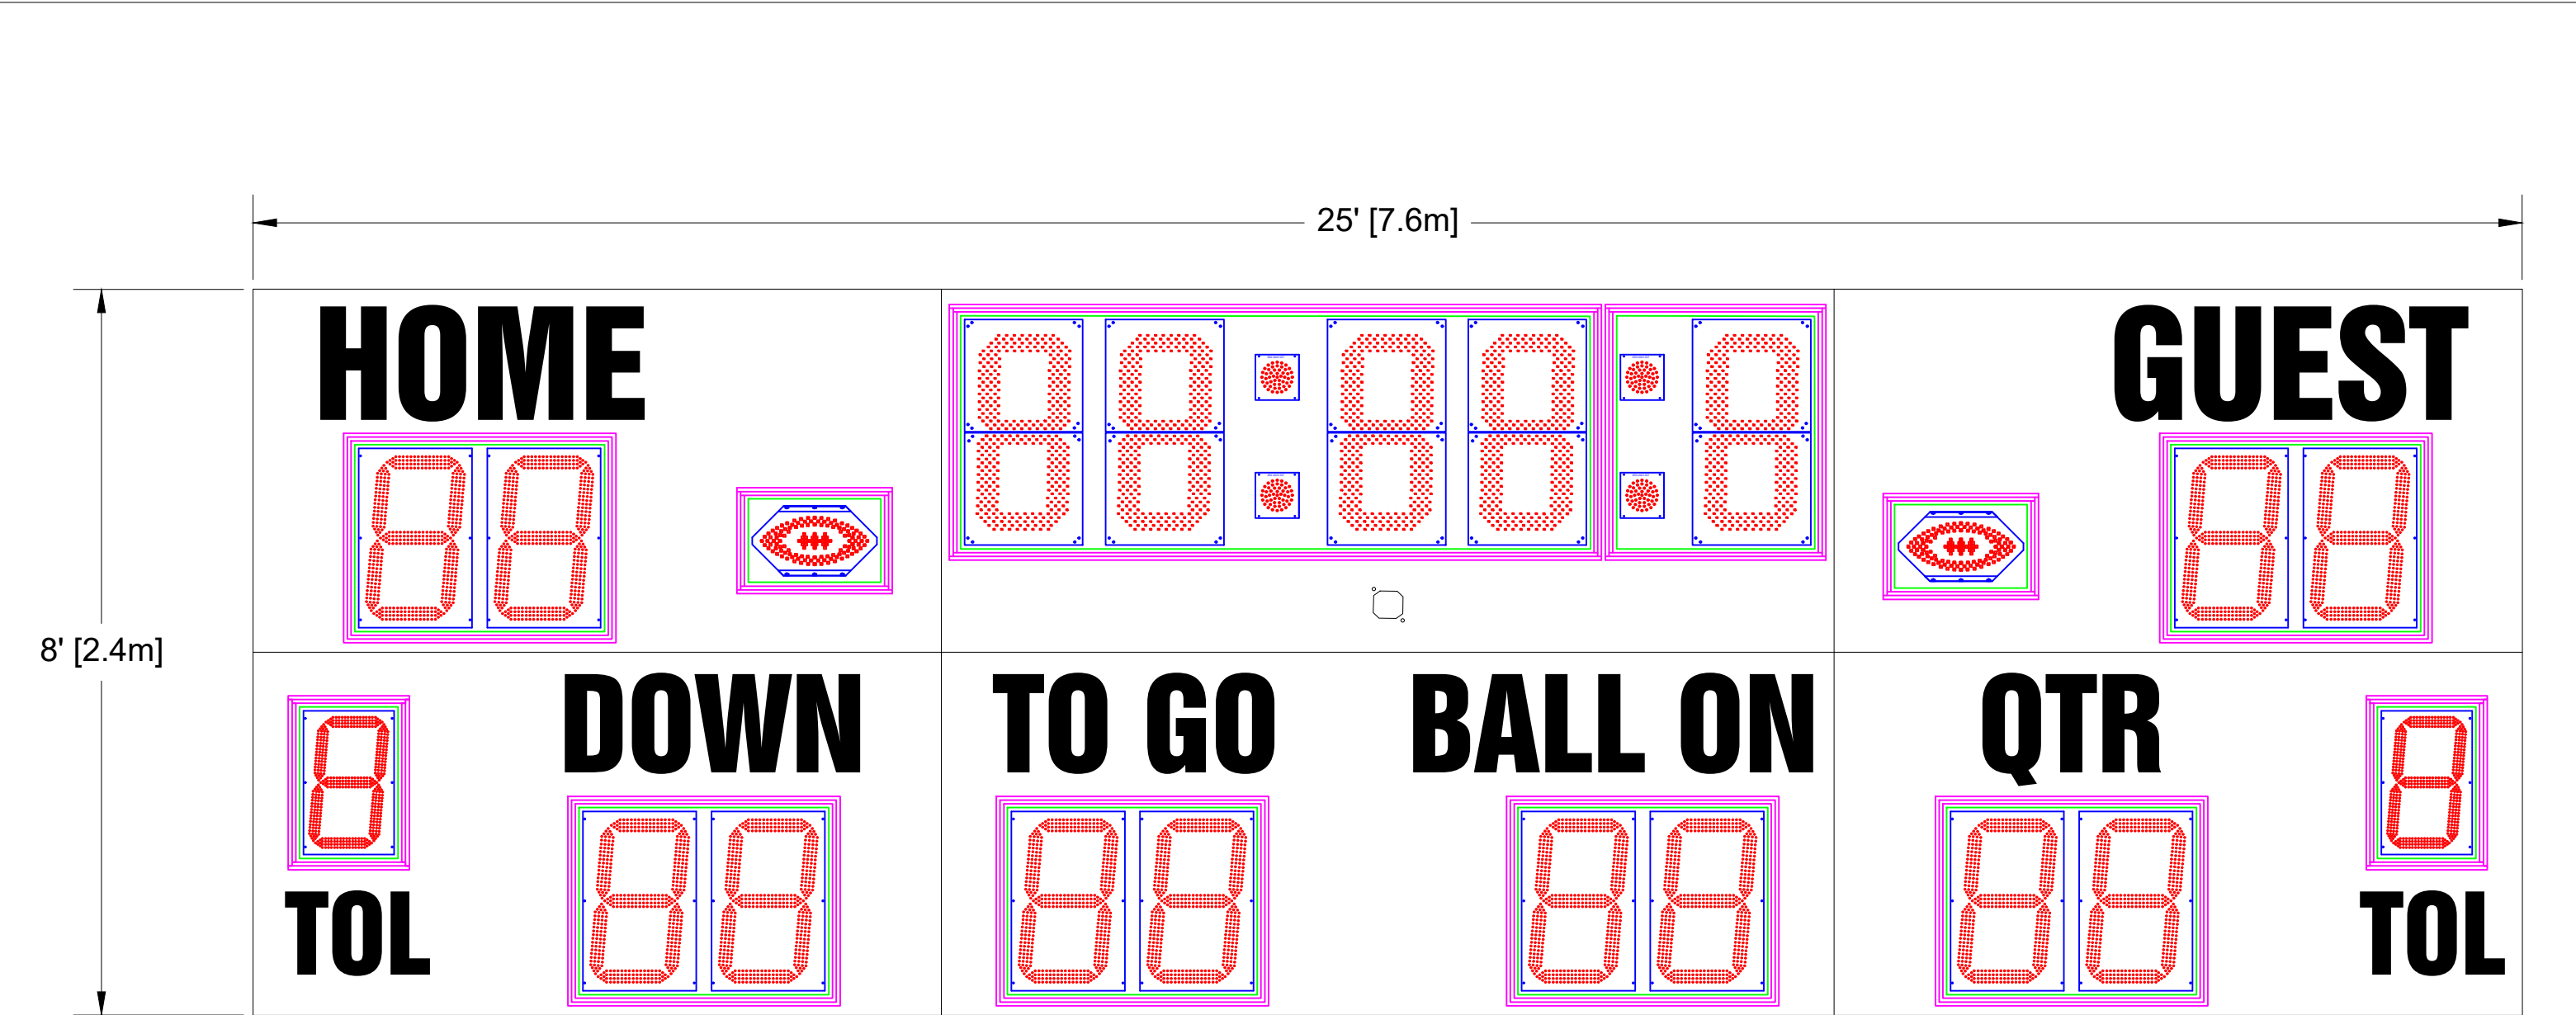

Scoreboard Specifications

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1056 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.

30" LED Digits for TOD
22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

15" White Vinyl Lettering for HOME, GUEST
13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

This Layout is for internal reference only.

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:			
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.			
TOLERANCE INFORMATION Dimensions are in Inches			
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°			
THIRD ANGLE PROJECTIONS			
DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M8025CxCV-TF			
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8025CUXV-TF	12/18/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE
CGTHOMPSON		1 OF 1	