

Scoreboard Specifications

Overall size: 4' (W) x 7'4 1/2" (H) x 4" (D)  
Approximate Weight: 173 lbs

7" LED Digits for ALL  
3" Electronic Team Names of 12 characters

- All LED digits include the following:
- \*Shatter Resistant Lexan cover
  - \*Conformal coating to protect from environmental conditions
  - \*Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS



Electrical Ratings:



- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz. Requires an earth ground connection.
- Nominal AC Current: 3.5 Amps
- AC Current Rating of Fuse or Circuit Breaker within SB: 15 Amps

Incoming AC Mains (Power Cord) and Data Location:  
On the Top of the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard to be determined by customer in accordance with all local electrical codes.

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	6/1/21	CGT

				4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
<u>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</u>		DESCRIPTION			
<p>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWINGS INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.</p>		OES ELECTRONIC SCOREBOARDS M5004SIXH-INFO			
		SIZE	FILENAME	INIT DRAWING DATE	REV
		B	M5004SIXH-INFO.idw	6/1/2021	A
		USAGE			
TOLERANCE INFORMATION Dimensions are in inches		USE FOR REVIEW			
THIRD ANGLE PROJECTION		SCALE		DRAWN BY	
		NTS		cgthompson	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 2°				PAGE 1 OF 1	

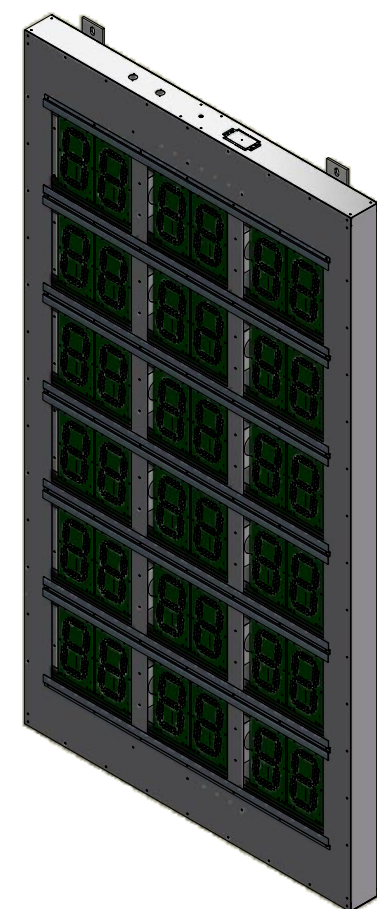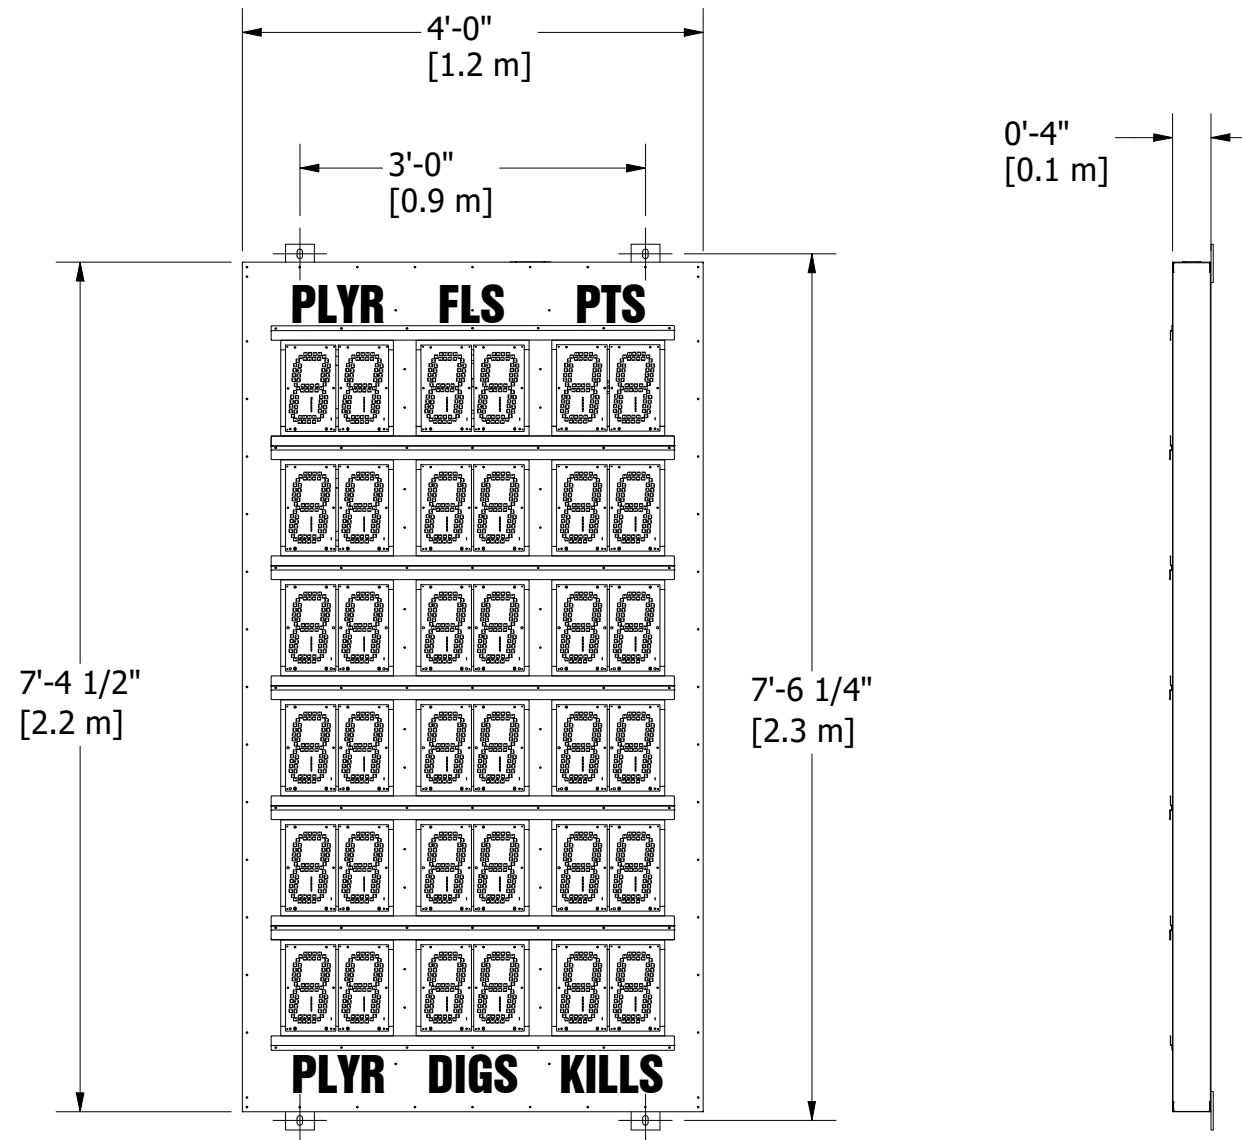

**Scoreboard Specifications**

Overall size: 4' (W) x 7'4 1/2" (H) x 4" (D)  
Approximate Weight: 164 lbs

7" LED Digits (ALL)

4" White Vinyl Lettering

- All LED digits include the following:
- \*Shatter Resistant Lexan cover
  - \*Conformal coating to protect from environmental conditions
  - \*Surface Mount Technology LEDs allowing for wide viewing angle

**ELECTRICAL SPECIFICATIONS**

- Electrical Ratings:
- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz. Requires an earth ground connection.
  - Nominal AC Current: 3.2 Amps
  - AC Current Rating of Fuse or Circuit Breaker within SB: 8 Amps

Incoming AC Mains (Power Cord) and Data Location:  
On the Top of the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard to be determined by customer in accordance with all local electrical codes.

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWINGS INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.

TOLERANCE INFORMATION  
Dimensions are in inches  
Fractional ± 1/16"  
Two Place Decimals ± 0.02"  
Three Place Decimals ± 0.005"  
Four Place Decimals ± 0.0005"  
Angular ± 2'

THIRD ANGLE PROJECTION

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	6/16/21	M.LI
		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M5004SIXV-INFO			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M5004SIXV-INFO.idw	6/16/2021	A
USAGE			
USE FOR REVIEW			
SCALE	NTS	DRAWN BY M.LI	PAGE 1 OF 1