

Scoreboard Specifications

Overall size: 15' (W) x 4'11" (H) x 6" (D)

Approximate Weight: 486 lbs

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the [TIME] Digit(s).

17" LED Digits for TIME, SCORE

14" LED Digits for INNING

4" LED Dots for BALL, STRIKE, OUT, H, E

10" Electronic Team Names at 8 CH

8" White Vinyl Lettering for INNING

5" White Vinyl Lettering for BALL, STRIKE, OUT, H, E

All LED digits include the following:

- Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle




USAGE


SCALE NTS

USE FOR REVIEW

DRAWN BROONALD PAGE 1 OF 1

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"

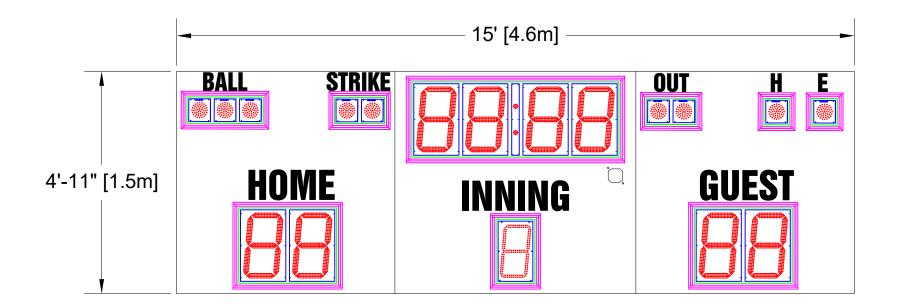

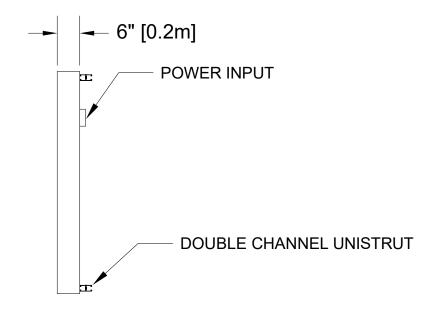

Scoreboard Specifications

Overall size: 15' (W) x 4'11" (H) x 6" (D)

Approximate Weight: 443 lbs

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the [TIME] Digit(s).

17" LED Digits for TIME, SCORE


14" LED Digits for INNING

4" LED Dots for BALL, STRIKE, OUT, H, E

8" White Vinyl Lettering for INNING, HOME, GUEST 5" White Vinyl Lettering for BALL, STRIKE, OUT, H, E

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

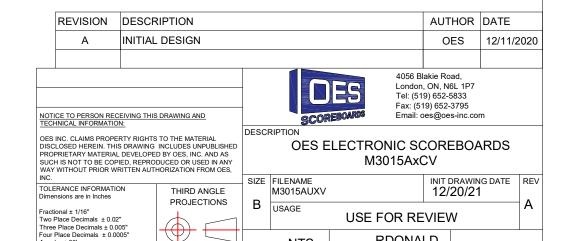

SCALE NTS

DRAWN BROONALD PAGE 1 OF 1