

Scoreboard Specifications

Overall size: 18' (W) x 9' (H) x 6" (D)
Approximate Weight: 991 lbs

17" LED Digits for **TIME, SCORE**
14" LED Digits for **PLAYER, PENALTY**

10" Electronic Team names at 8 CH

7" White Vinyl Lettering for **PLAYER, PENALTY, PERIOD**

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle



Electrical Specifications


Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps.

Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the PERIOD Digit(s).

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/15/2023

				4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
<u>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</u>		DESCRIPTION			
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		OES ELECTRONIC SCOREBOARDS M3018BxCE			
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30'		SIZE	FILENAME M3018BUXE	INIT DRAWING DATE 3/15/23	REV
		B	USAGE	USE FOR REVIEW	
		SCALE	NTS	DRAWN BY VPERUMAL	PAGE 1 OF 1

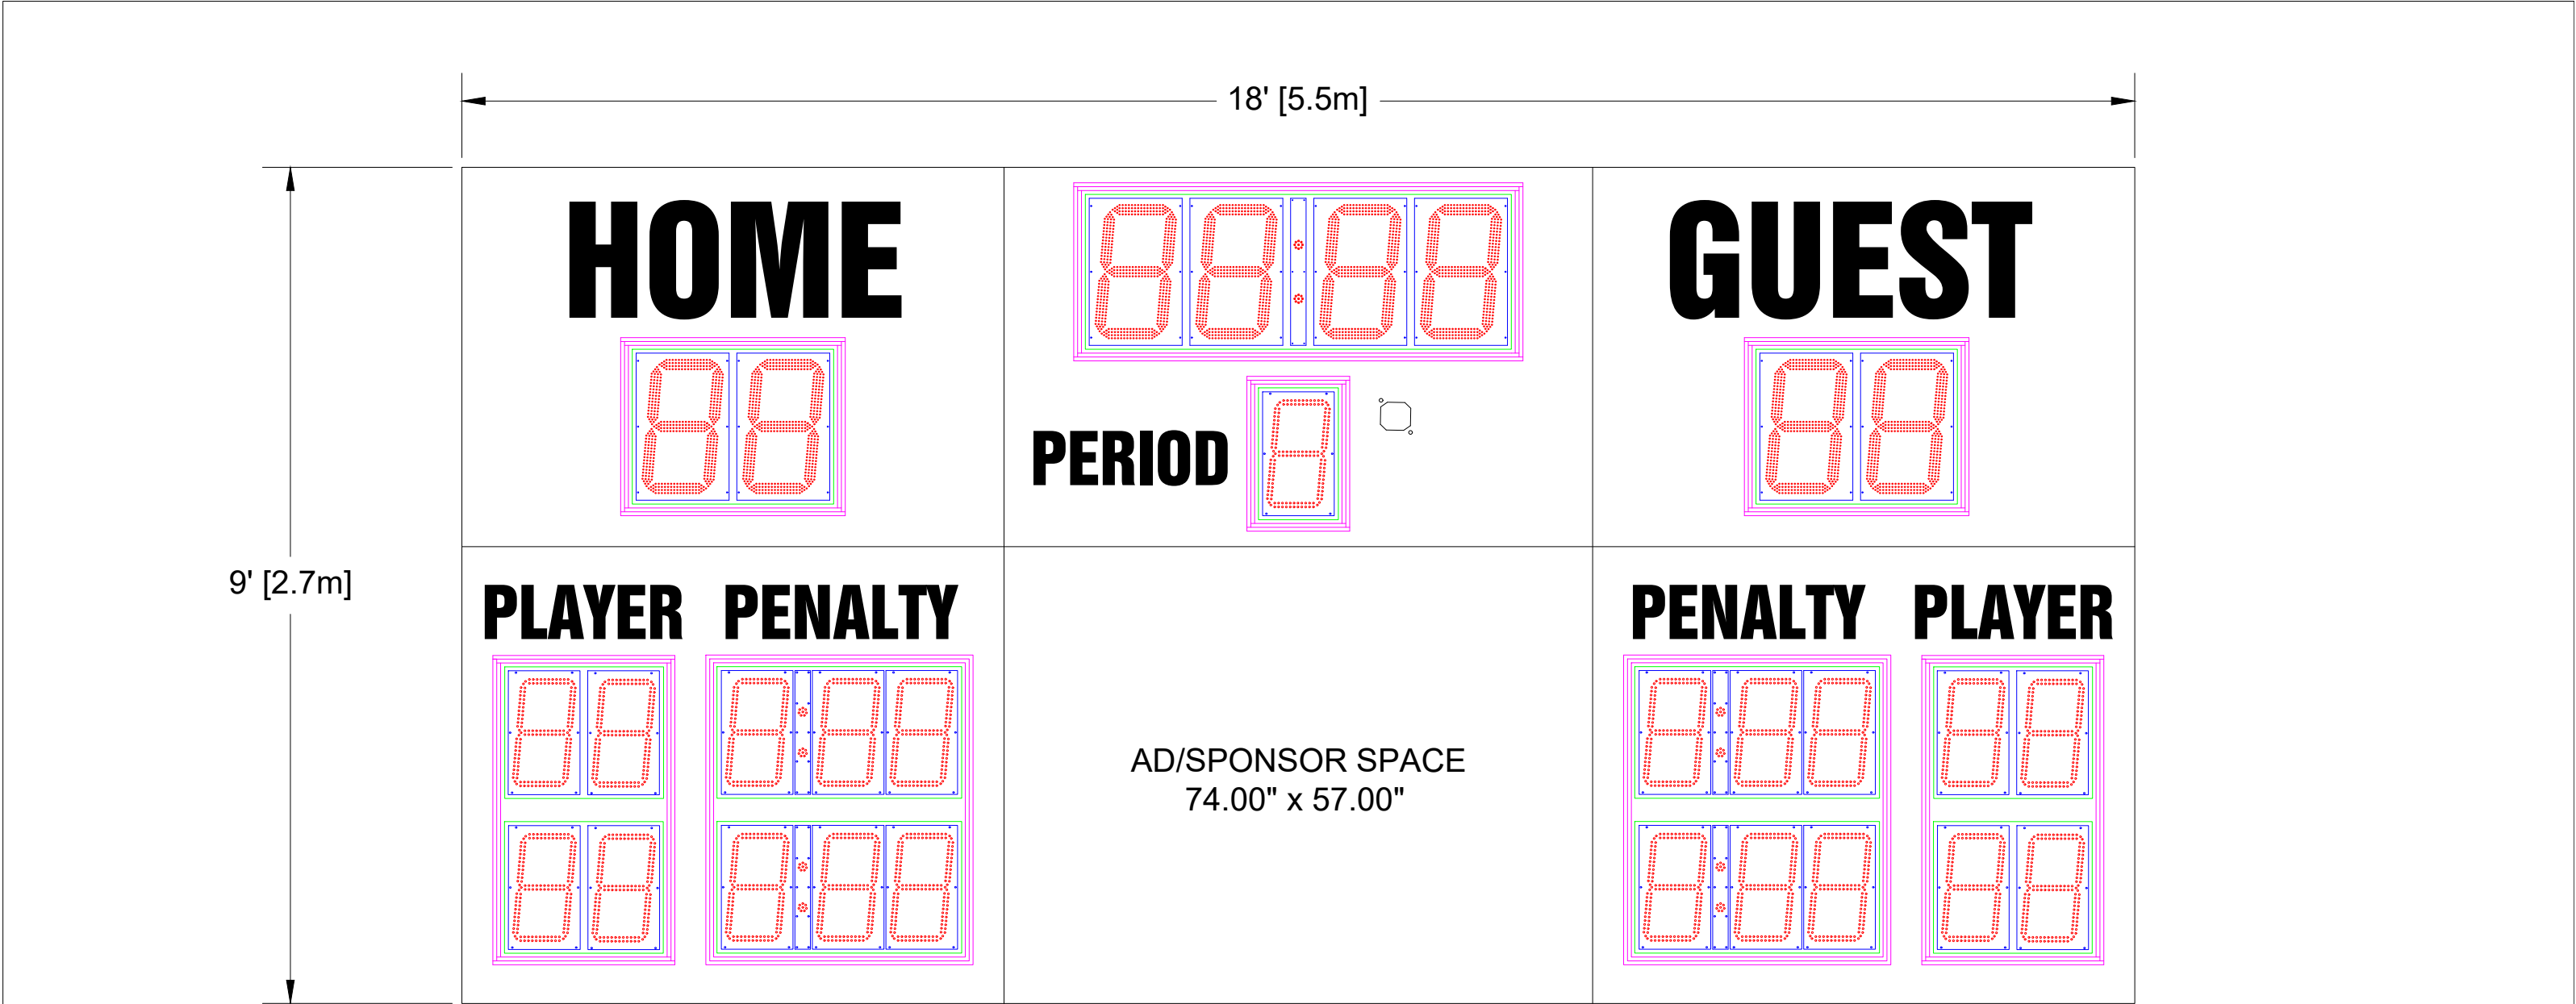

Scoreboard Specifications

Overall size: 18' (W) x 9' (H) x 6" (D)
Approximate Weight: 955 lbs

17" LED Digits for **TIME, SCORE**
14" LED Digits for **PLAYER, PENALTY**

15" White Vinyl Lettering for **HOME, GUEST**
7" White Vinyl Lettering for **PLAYER, PENALTY, PERIOD**

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

Electrical Specifications

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps.
Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the **PERIOD** Digit(s).

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/15/2023

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>	
		<div></div> <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M3018BxCV			
SIZE	FILENAME M3018BUXV	INIT DRAWING DATE 3/15/23	REV
B	USAGE		A
	USE FOR REVIEW		
SCALE	NTS	DRAWN BY VPERUMAL	