

**Scoreboard Specifications**

Overall size: 25' (W) x 4'-7" (H) x 6" (D)  
Approximate Weight: 758 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the TIME Digit(s).



22" LED Digits for TIME, SCORE  
17" LED Digits for PERIOD


10" Electronic Team names at 8 CH

8" White Vinyl Lettering for PERIOD

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

| REVISION |  | DESCRIPTION    |  | AUTHOR | DATE       |
|----------|--|----------------|--|--------|------------|
| A        |  | INITIAL DESIGN |  | OES    | 12/20/2021 |
|          |  |                |  |        |            |

|  |   |  |      |                  |                   |             |
|--|---|--|------|------------------|-------------------|-------------|
|  |   | <div><div></div><div>4056 Blakie Road,<br/>London, ON, N6L 1P7<br/>Tel: (519) 652-5833<br/>Fax: (519) 652-3795<br/>Email: oes@oes-inc.com</div></div> |      |                  |                   |             |
|  |   | DESCRIPTION<br>OES ELECTRONIC SCOREBOARDS<br>M3025AxCE   |      |                  |                   |             |
| TOLERANCE INFORMATION<br>Dimensions are in Inches<br><br>Fractional ± 1/16"<br>Two Place Decimals ± 0.02"<br>Three Place Decimals ± 0.005"<br>Four Place Decimals ± 0.0005"<br>Angular ± 30° | THIRD ANGLE PROJECTIONS   |  | SIZE | FILENAME         | INIT DRAWING DATE | REV         |
|  |  |  | B    | M3025AUXE        | 12/20/21          | A           |
|  |   | USAGE  |      | USE FOR REVIEW   |                   |             |
| SCALE  |   | NTS  |      | DRAWN BY RDONALD |                   | PAGE 1 OF 1 |

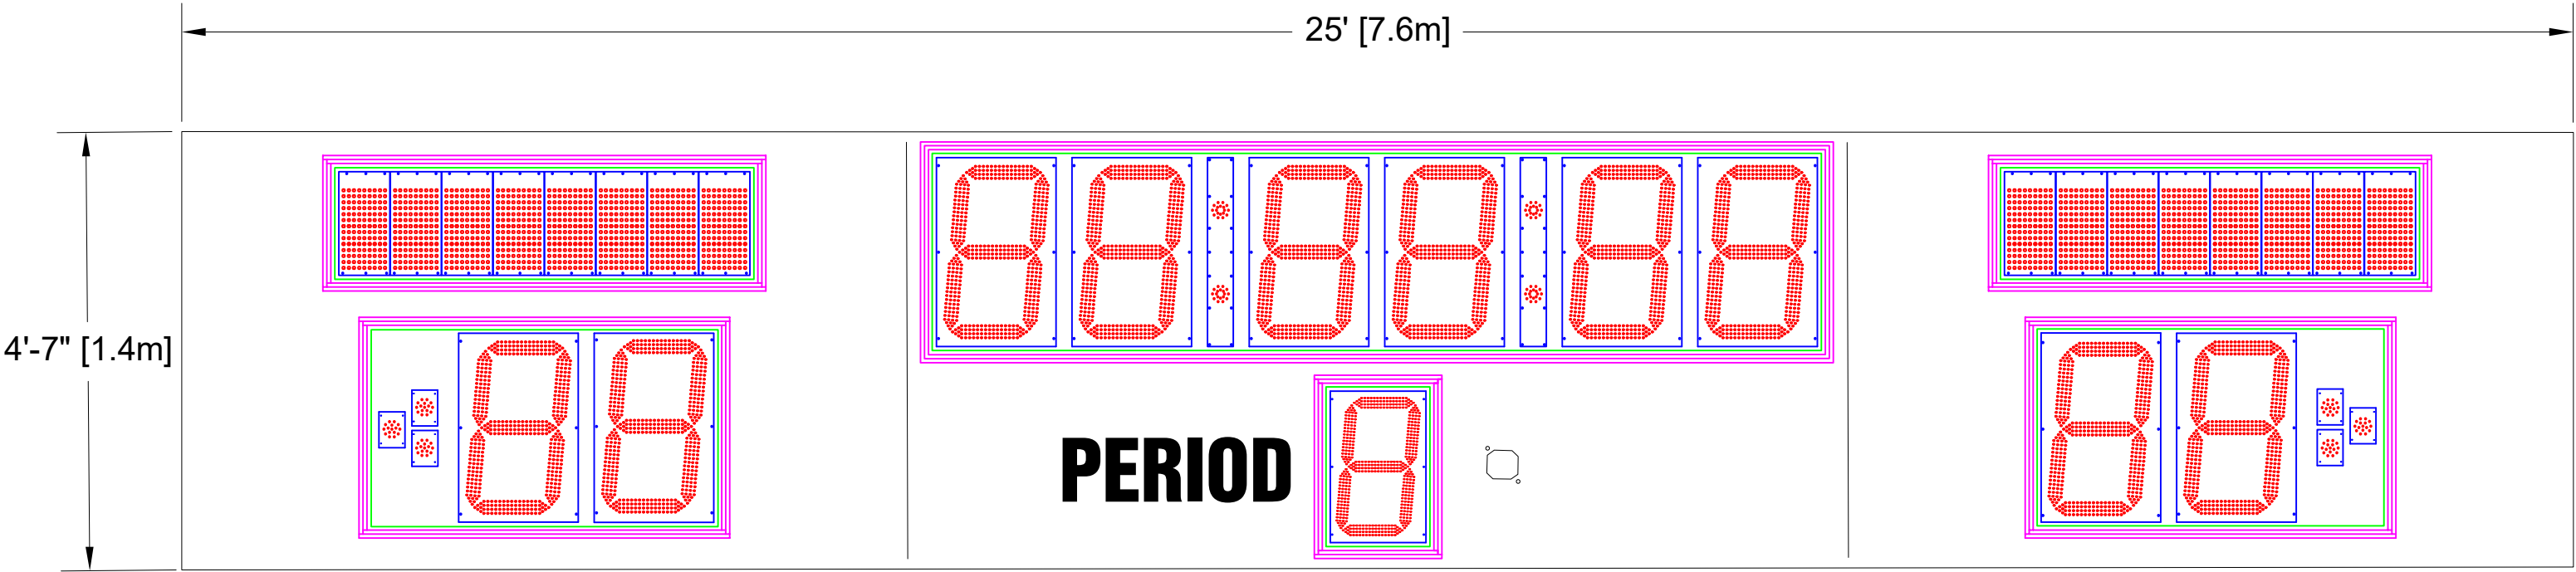

**Scoreboard Specifications**

Overall size: 25' (W) x 4'-7" (H) x 6" (D)  
Approximate Weight: 779 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the TIME Digit(s).

22" LED Digits for TIME, SCORE  
17" LED Digits for PERIOD

10" Electronic Team names at 8 CH

8" White Vinyl Lettering for PERIOD

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

|          |  |                |  |        |            |
|----------|--|----------------|--|--------|------------|
| REVISION |  | DESCRIPTION    |  | AUTHOR | DATE       |
| A        |  | INITIAL DESIGN |  | OES    | 12/20/2021 |

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.


TOLERANCE INFORMATION  
Dimensions are in Inches

Fractional ± 1/16"  
Two Place Decimals ± 0.02"  
Three Place Decimals ± 0.005"  
Four Place Decimals ± 0.0005"  
Angular ± 30'

THIRD ANGLE PROJECTIONS

4056 Blakie Road,  
London, ON, N6L 1P7  
Tel: (519) 652-5833  
Fax: (519) 652-3795  
Email: oes@oes-inc.com

|   |                         |                               |                |
|---|-------------------------|-------------------------------|----------------|
| DESCRIPTION                               |                         |                               |                |
| OES ELECTRONIC SCOREBOARDS<br>M3025AxCE-H |                         |                               |                |
| SIZE                                      | FILENAME<br>M3025AUXE-H | INIT DRAWING DATE<br>12/20/21 | REV            |
| B   | USAGE<br>USE FOR REVIEW |                               | A              |
| SCALE<br>NTS                              |                         | DRAWN BY<br>RDONALD           | PAGE<br>1 OF 1 |

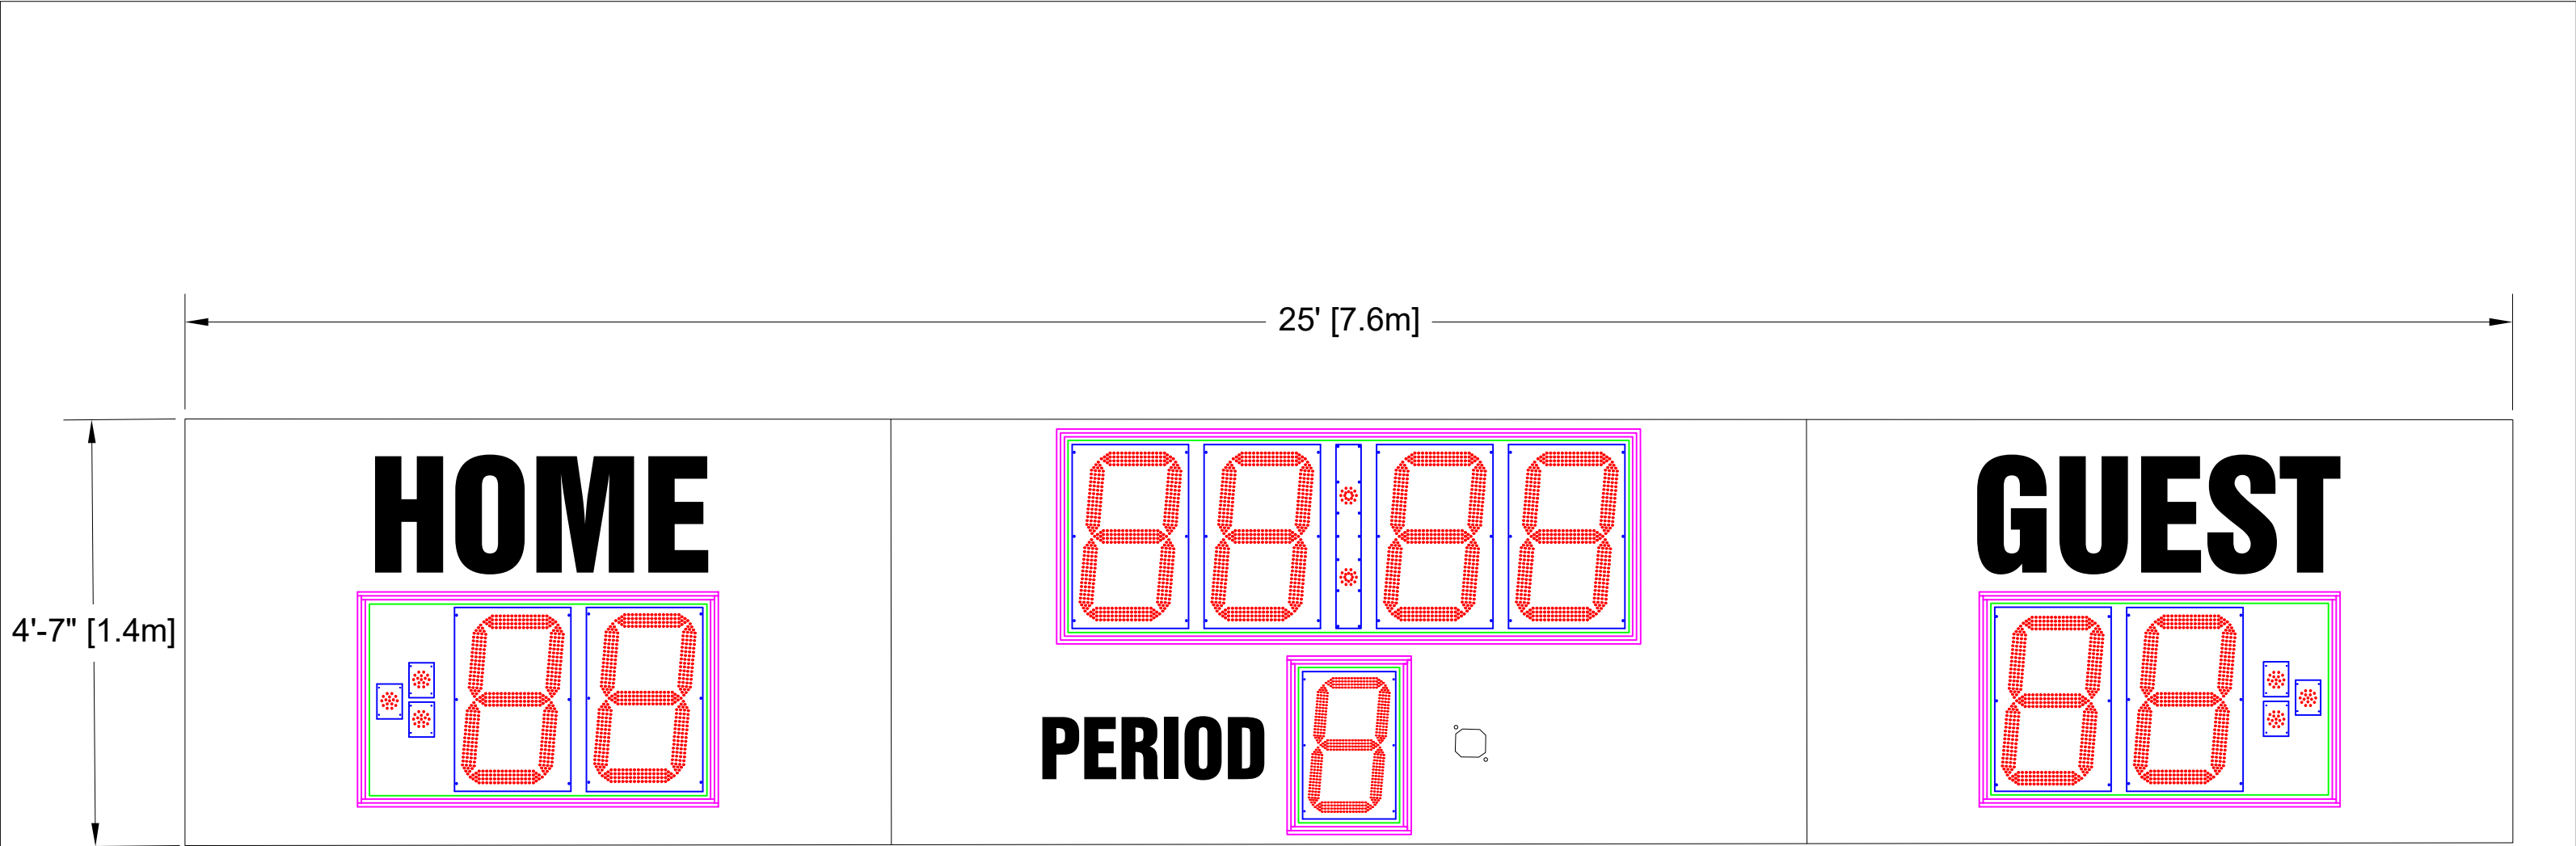

**Scoreboard Specifications**

Overall size: 25' (W) x 4'-7" (H) x 6" (D)  
Approximate Weight: 722 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the TIME Digit(s).

22" LED Digits for TIME, SCORE  
17" LED Digits for PERIOD

15" White Vinyl Lettering for HOME. GUEST  
8" White Vinyl Lettering for PERIOD

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

|          |  |                |  |        |            |
|----------|--|----------------|--|--------|------------|
| REVISION |  | DESCRIPTION    |  | AUTHOR | DATE       |
| A        |  | INITIAL DESIGN |  | OES    | 12/20/2021 |

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION  
Dimensions are in Inches


Fractional ± 1/16"  
Two Place Decimals ± 0.02"  
Three Place Decimals ± 0.005"  
Four Place Decimals ± 0.0005"  
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,  
London, ON, N6L 1P7  
Tel: (519) 652-5833  
Fax: (519) 652-3795  
Email: oes@oes-inc.com

|   |           |                   |          |         |      |        |
|---|-----------|-------------------|----------|---------|------|--------|
| DESCRIPTION                             |           |                   |          |         |      |        |
| OES ELECTRONIC SCOREBOARDS<br>M3025AxCV |           |                   |          |         |      |        |
| SIZE                                    | FILENAME  | INIT DRAWING DATE | REV      |         |      |        |
| B                                       | M3025AUXV | 12/20/21          | A        |         |      |        |
|   | USAGE     |                   |          |         |      |        |
| SCALE                                   |           | NTS               | DRAWN BY | RDONALD | PAGE | 1 OF 1 |

USE FOR REVIEW

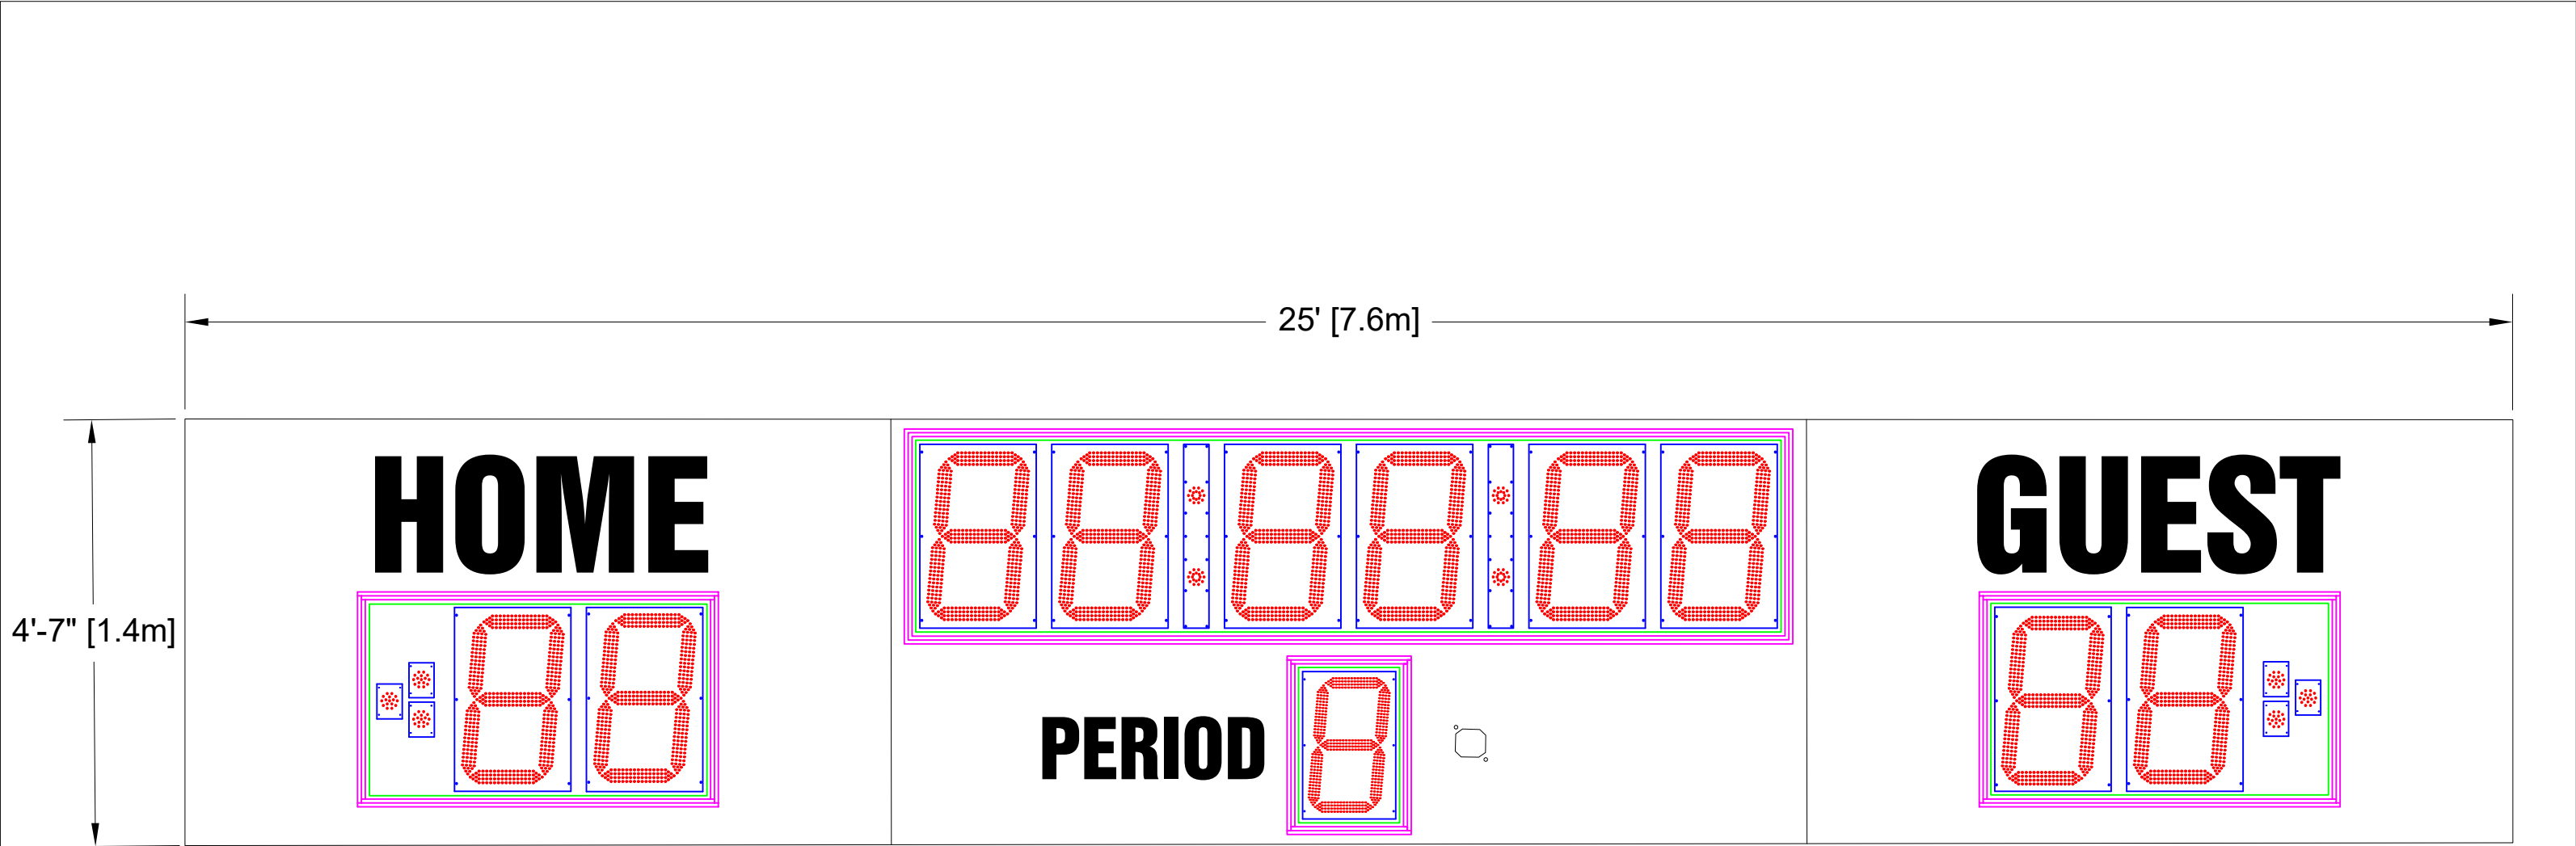

Scoreboard Specifications

Overall size: 25' (W) x 4'-7" (H) x 6" (D)  
Approximate Weight: 773 lbs  
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.  
Incoming Mains Power and Data Location: Behind the TIME Digit(s).

22" LED Digits for TIME, SCORE  
17" LED Digits for PERIOD

15" White Vinyl Lettering for HOME, GUEST  
8" White Vinyl Lettering for PERIOD

- All LED digits include the following:
- \* Shatter Resistant Lexan cover
  - \* Conformal coating to protect from environmental conditions
  - \* Surface Mount Technology LEDs allowing for wider viewing angle

|          |  |                |  |        |            |
|----------|--|----------------|--|--------|------------|
| REVISION |  | DESCRIPTION    |  | AUTHOR | DATE       |
| A        |  | INITIAL DESIGN |  | OES    | 12/20/2021 |

|  |                            |   |             |                 |  |
|--|----------------------------|---|-------------|-----------------|--|
| <div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:<br/><br/>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> |                            | <div><div></div><div>4056 Blakie Road,<br/>London, ON, N6L 1P7<br/>Tel: (519) 652-5833<br/>Fax: (519) 652-3795<br/>Email: oes@oes-inc.com</div></div> |             |                 |  |
| TOLERANCE INFORMATION<br>Dimensions are in Inches<br><br>Fractional ± 1/16"<br>Two Place Decimals ± 0.02"<br>Three Place Decimals ± 0.005"<br>Four Place Decimals ± 0.0005"<br>Angular ± 30'   |                            | THIRD ANGLE PROJECTIONS<br>   |             |                 |  |
| SIZE<br><b>B</b>   | FILENAME<br>M3025AUXV-H    | INIT DRAWING DATE<br>12/20/21   |             | REV<br><b>A</b> |  |
| USAGE<br><b>USE FOR REVIEW</b>   |                            |   |             |                 |  |
| SCALE<br><b>NTS</b>  | DRAWN BY<br><b>RDONALD</b> |   | PAGE 1 OF 1 |                 |  |