

Scoreboard Specifications

Overall size: 25' (W) x 9'-10" (H) x 6" (D)
Approximate Weight: 1171 lbs

22" LED Digits for **TIME, SCORE**
17" LED Digits for **PLAYER, PENTALY, PERIOD**

10" Electronic Team names at **8 CH**

9" White Vinyl Lettering for **PLAYER, PENALTY**
6" White Vinyl Lettering for **PERIOD**


- All LED digits include the following:**
- * Shatter Resistant Lexan cover.
 - * Conformal coating to protect from environmental conditions.
 - * Surface Mount Technology LEDs allowing for wider viewing angle.


Electrical Specifications


Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps.
Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the **LEFT PENALTY** Digit(s).

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/15/2023

		<div></div> <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>			
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS</div> <div>M3025CxCE</div>			
<div>SIZE</div> <div>FILENAME</div> <div>M3025CUXE</div>		<div>INIT DRAWING DATE</div> <div>3/15/23</div>		<div>REV</div> <div>A</div>	
<div>B</div> <div>USAGE</div>		<div>USE FOR REVIEW</div>			
<div>SCALE</div> <div>NTS</div>		<div>DRAWN BY</div> <div>VPERUMAL</div>		<div>PAGE</div> <div>1 OF 1</div>	

<div>TOLERANCE INFORMATION</div> <div>Dimensions are in Inches</div> <div>Fractional ± 1/16"</div> <div>Two Place Decimals ± 0.02"</div> <div>Three Place Decimals ± 0.005"</div> <div>Four Place Decimals ± 0.0005"</div> <div>Angular ± 30'</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>
---	--	---

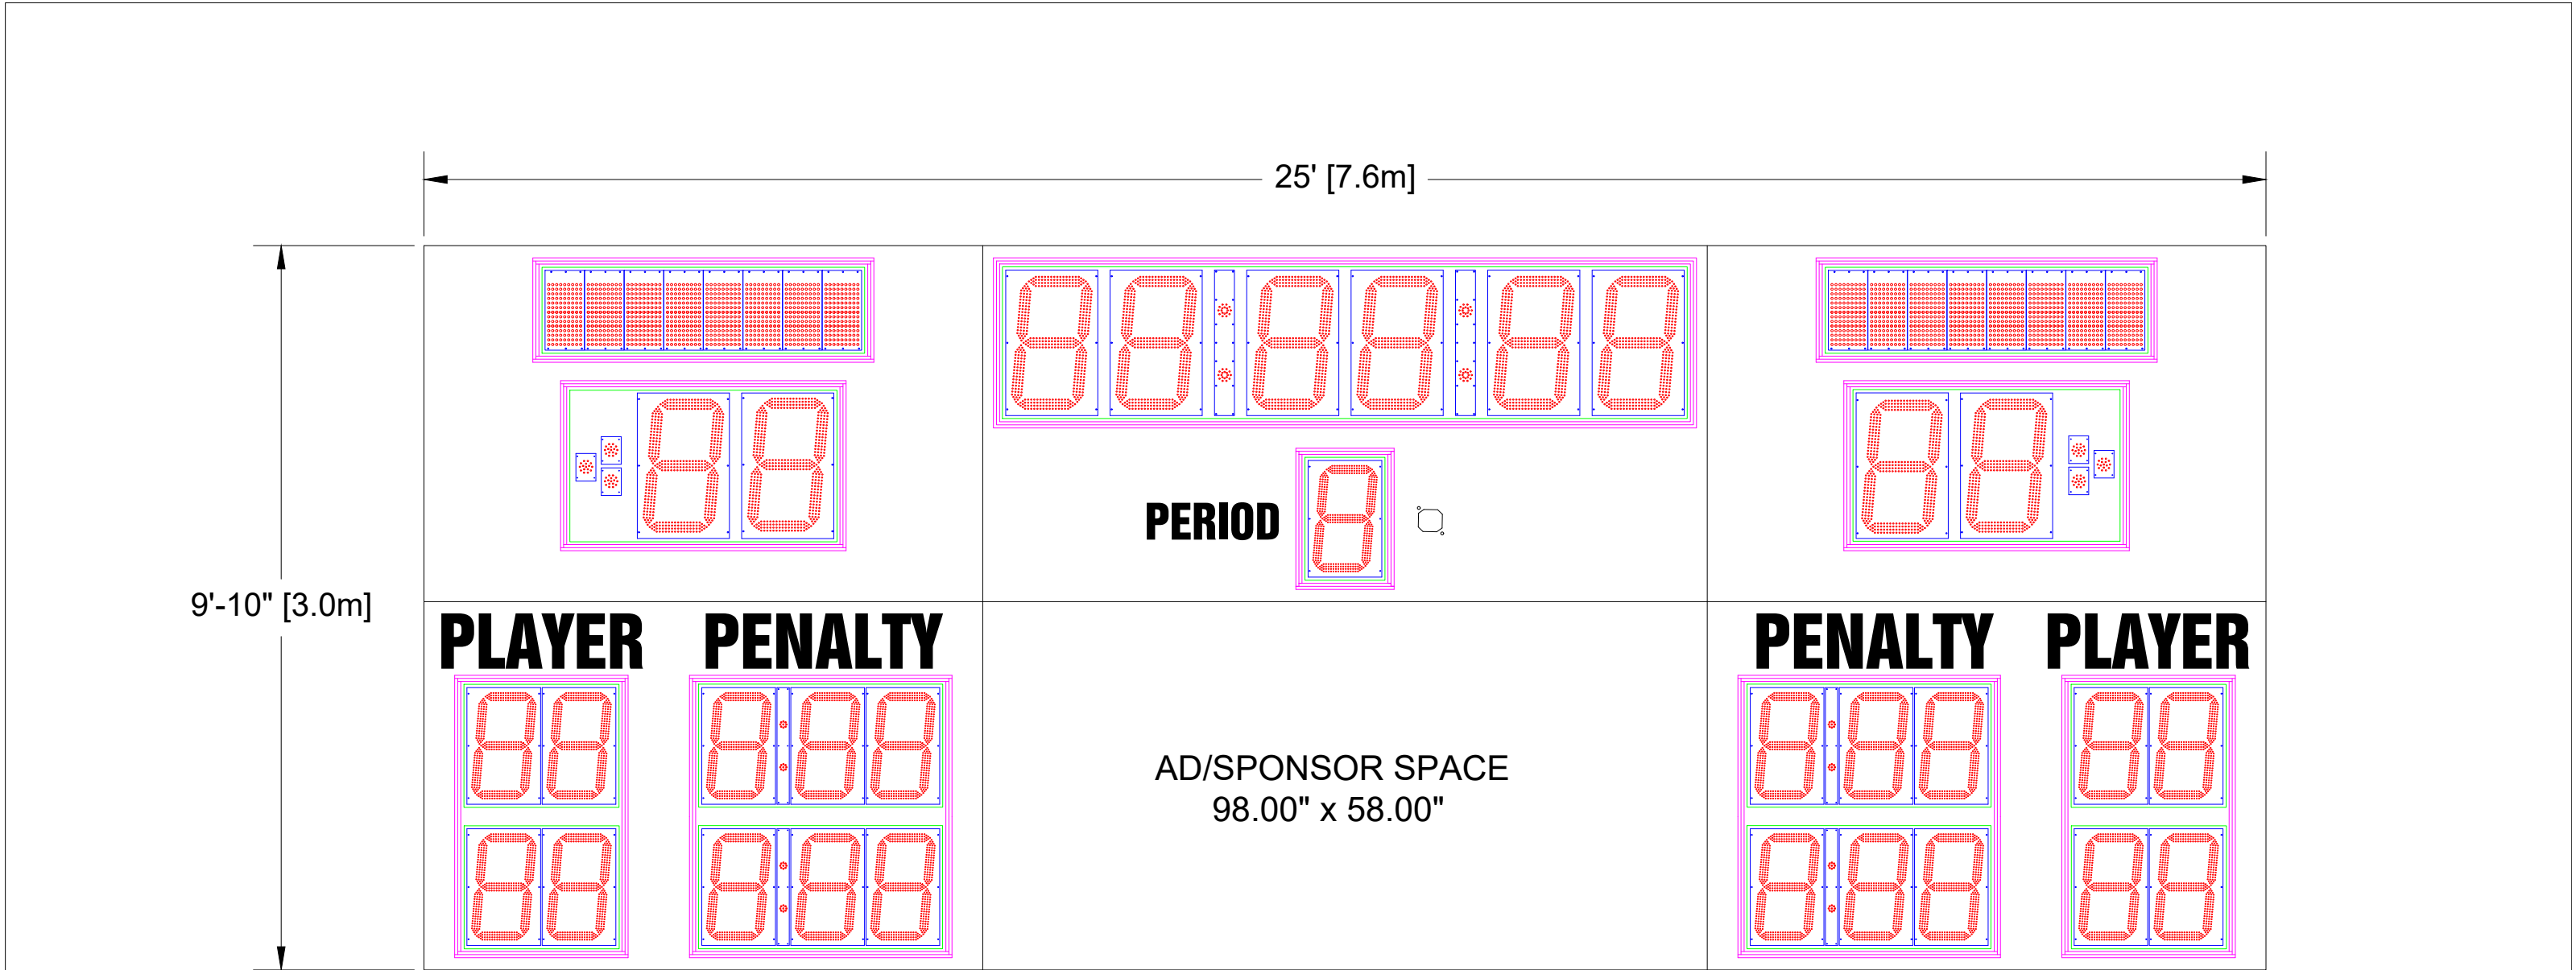

Scoreboard Specifications

Overall size: 25' (W) x 9'-10" (H) x 6" (D)
Approximate Weight: 1195 lbs

22" LED Digits for **TIME, SCORE**
17" LED Digits for **PLAYER, PENTALY, PERIOD**

10" Electronic Team names at **8 CH**

9" White Vinyl Lettering for **PLAYER, PENALTY**
6" White Vinyl Lettering for **PERIOD**



- All LED digits include the following:**
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle.


Electrical Specifications

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps.
Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the **LEFT PENALTY** Digit(s).

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/15/2023

		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS</div> <div>M3025CxCE-H</div>	
<div>TOLERANCE INFORMATION</div> <div>Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div><div>SIZE</div><div>FILENAME M3025CUXE-H</div><div>INIT DRAWING DATE 3/15/23</div><div>REV A</div></div>	
<div>THIRD ANGLE PROJECTIONS</div> <div></div>		<div><div>B</div><div>USAGE</div><div>USE FOR REVIEW</div></div>	
<div>SCALE</div> <div>NTS</div>		<div><div>DRAWN BY</div><div>VPERUMAL</div></div> <div><div>PAGE</div><div>1 OF 1</div></div>	

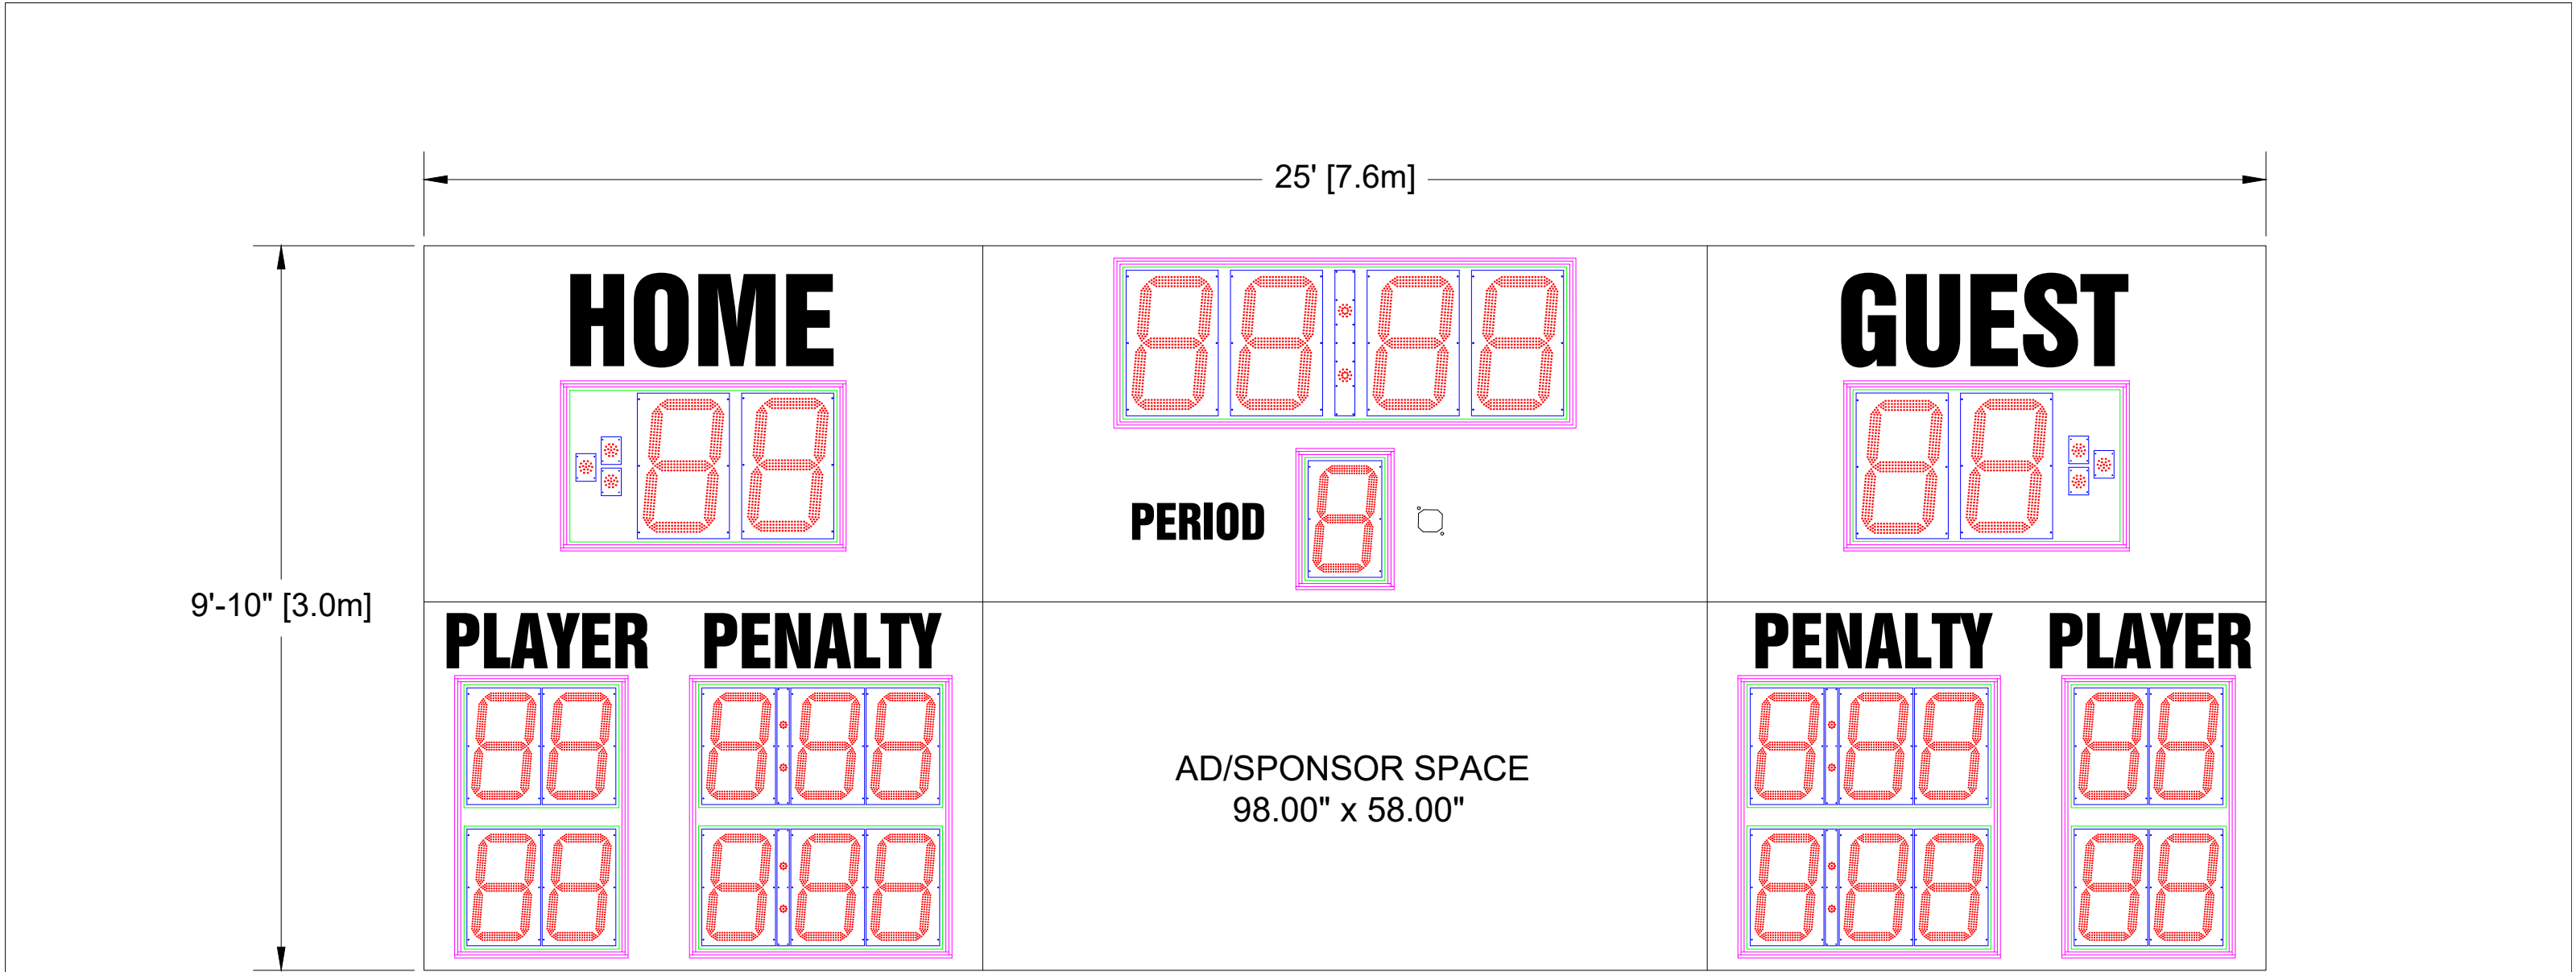

Scoreboard Specifications

Overall size: 25' (W) x 9'-10" (H) x 6" (D)
Approximate Weight: 1134 lbs

22" LED Digits for **TIME, SCORE**
17" LED Digits for **PLAYER, PENTALY, PERIOD**


15" White Vinyl Lettering for **HOME, GUEST**
9" White Vinyl Lettering for **PLAYER, PENALTY**
6" White Vinyl Lettering for **PERIOD**


- All LED digits include the following:**
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

Electrical Specifications

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps.
Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the **LEFT PENALTY** Digit(s).

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/15/2023
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div><div>TOLERANCE INFORMATION Dimensions are in Inches</div><div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div></div> <div><div>THIRD ANGLE PROJECTIONS</div><div></div></div>		<div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div> <div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M3025CxCV</div>	
SIZE	FILENAME M3025CUXV	INIT DRAWING DATE 3/15/23	REV
B	USAGE	USE FOR REVIEW	
SCALE	NTS	DRAWN BY VPERUMAL	PAGE 1 OF 1

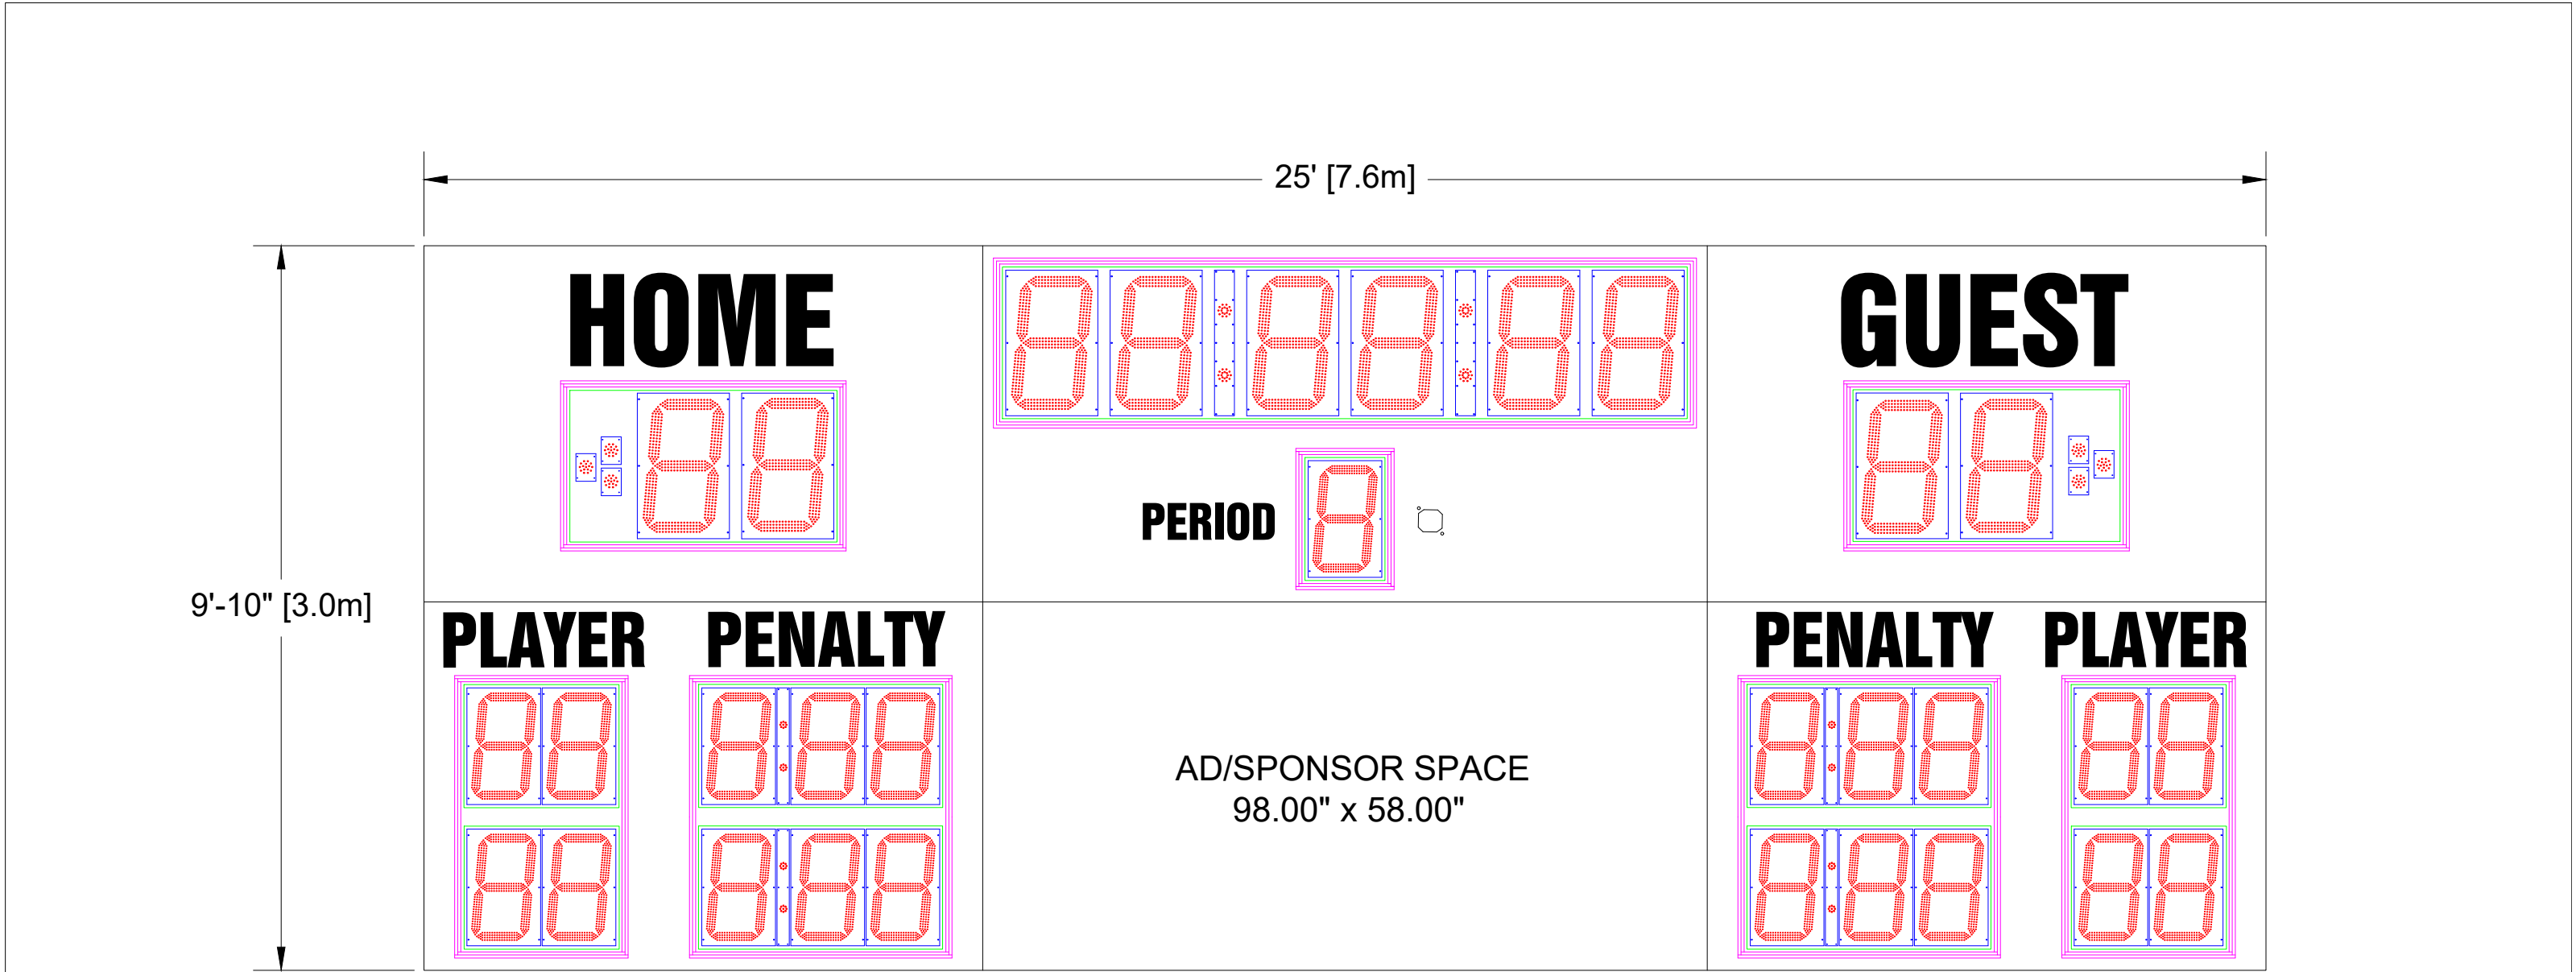

Scoreboard Specifications

Overall size: 25' (W) x 9'-10" (H) x 6" (D)
Approximate Weight: 1155 lbs

22" LED Digits for **TIME**, **SCORE**
17" LED Digits for **PLAYER**, **PENTALY**, **PERIOD**

15" White Vinyl Lettering for **HOME**, **GUEST**
9" White Vinyl Lettering for **PLAYER**, **PENALTY**
6" White Vinyl Lettering for **PERIOD**

- All LED digits include the following:**
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

Electrical Specifications

Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps.
Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the **LEFT PENALTY** Digit(s).

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/15/2023
		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
<div><div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div><div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div></div>		<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M3025CxCV-H</div>	
<div><div>TOLERANCE INFORMATION Dimensions are in Inches</div><div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div></div>		<div>SIZE</div> <div>B</div>	<div>FILENAME</div> <div>M3025CUXV-H</div>
		<div>THIRD ANGLE PROJECTIONS</div> <div></div>	<div>INIT DRAWING DATE</div> <div>3/15/23</div>
		<div>USAGE</div> <div>USE FOR REVIEW</div>	
<div>SCALE</div> <div>NTS</div>		<div>DRAWN BY</div> <div>VPERUMAL</div>	<div>PAGE</div> <div>1 OF 1</div>