

Scoreboard Specifications

Overall size: 32' (W) x 6'4" (H) x 6" (D)
Approximate Weight: 957 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the PERIOD Digit(s).

30" LED Digits for TIME, SCORE
22" LED Digits for PERIOD



LED POSSESSION Indicators


10" Electronic Team Names at 8 CH

8" White Vinyl Lettering for PERIOD

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	12/21/2021

		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>				
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>		<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M3032AxCE</div>				
<div>TOLERANCE INFORMATION</div> <div>Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>		<div>SIZE</div> <div>FILENAME M3032AUXE</div>	<div>INIT DRAWING DATE</div> <div>12/21/21</div>	<div>REV</div> <div>A</div>
				<div>USE FOR REVIEW</div>		
		<div>SCALE</div> <div>NTS</div>	<div>DRAWN BY</div> <div>RDONALD</div>		<div>PAGE</div> <div>1 OF 1</div>	

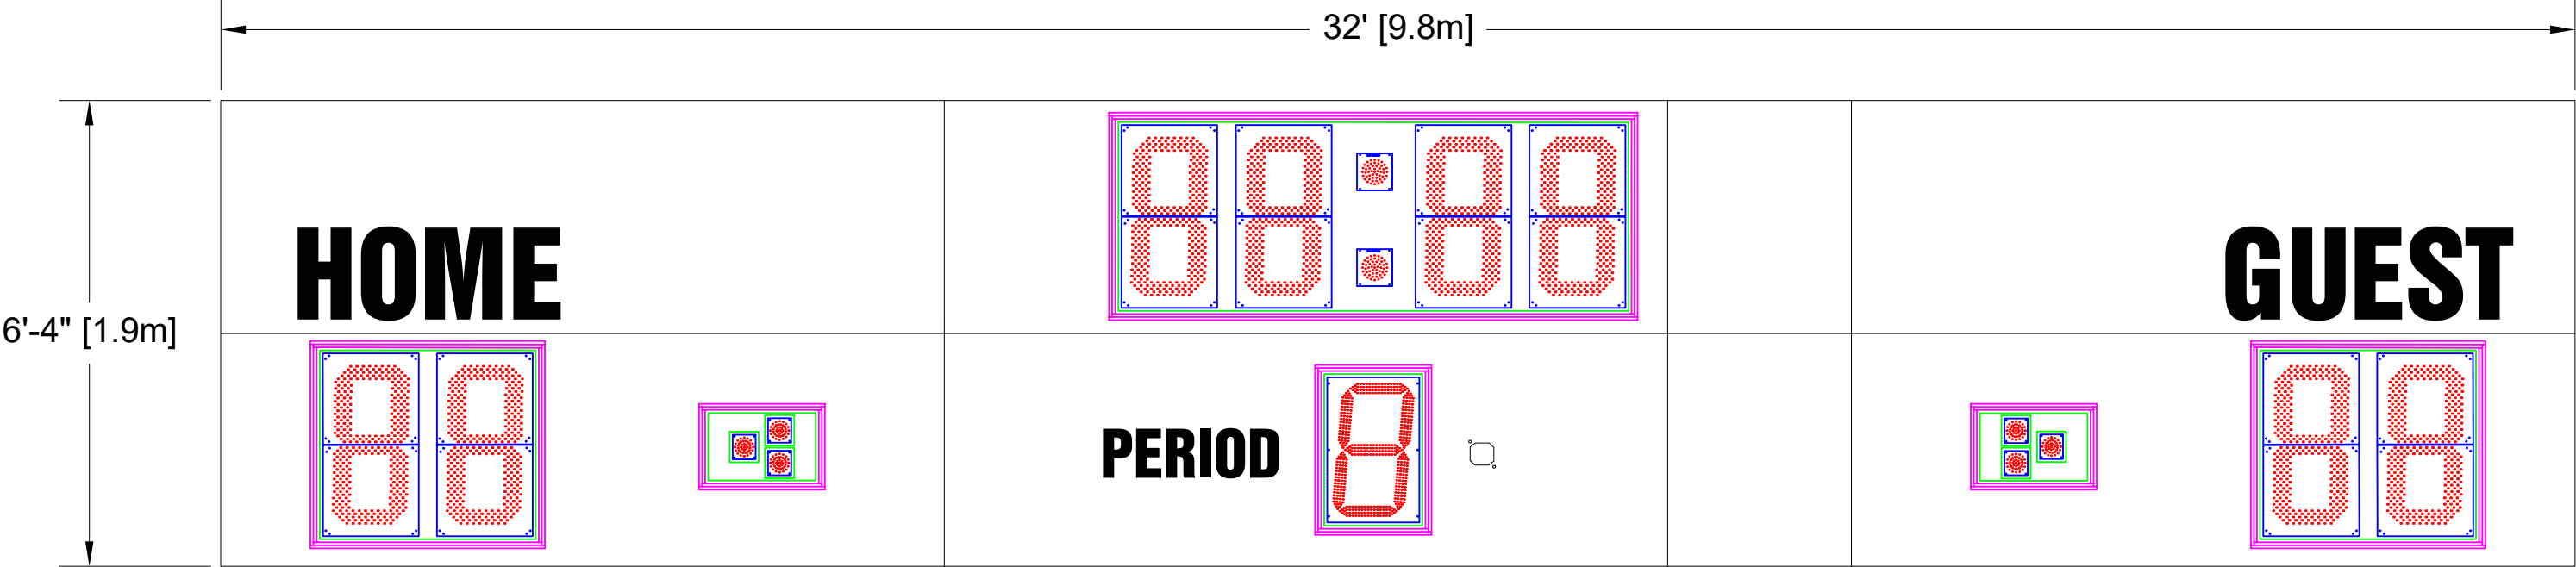

Scoreboard Specifications

Overall size: 32' (W) x 6'4" (H) x 6" (D)
Approximate Weight: 917 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the PERIOD Digit(s).

30" LED Digits for TIME, SCORE
22" LED Digits for PERIOD



LED POSSESION Indicators

15" White Vinyl Lettering for HOME, GUEST
8" White Vinyl Lettering for PERIOD

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/21/2021

		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>				
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div>						
DESCRIPTION						
OES ELECTRONIC SCOREBOARDS M3032AxCV						
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30'	THIRD ANGLE PROJECTIONS 	SIZE	FILENAME M3032AUXV	INIT DRAWING DATE 12/21/21	REV	
		B	USAGE			A
		USE FOR REVIEW				
SCALE		NTS	DRAWN BY CGTHOMPSON	PAGE	1 OF 1	