

Scoreboard Specifications

Overall size: 30' (W) x 4' (H) x 6" (D)
Approximate Weight: 700 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the TIME Digits.

17" LED Digits for TIME, SCORE
14" LED Digits for DOWN, TO GO, BALL ON, QTR, TOL


10" Electronic Team names at 8 Ch

8" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR, TOL

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	9/6/2022
		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
<div><div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div><div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div></div>		<div><div>DESCRIPTION</div><div>OES ELECTRONIC SCOREBOARDS M8030AxCE</div></div>	
<div><div>TOLERANCE INFORMATION Dimensions are in Inches</div><div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div></div>		<div><div>THIRD ANGLE PROJECTIONS</div><div></div></div>	
SIZE A	FILENAME M8030AXCE	INIT DRAWING DATE 9/6/22	REV A
USAGE USE FOR REVIEW			
SCALE NTS	DRAWN BY RDONALD		PAGE 1 OF 1

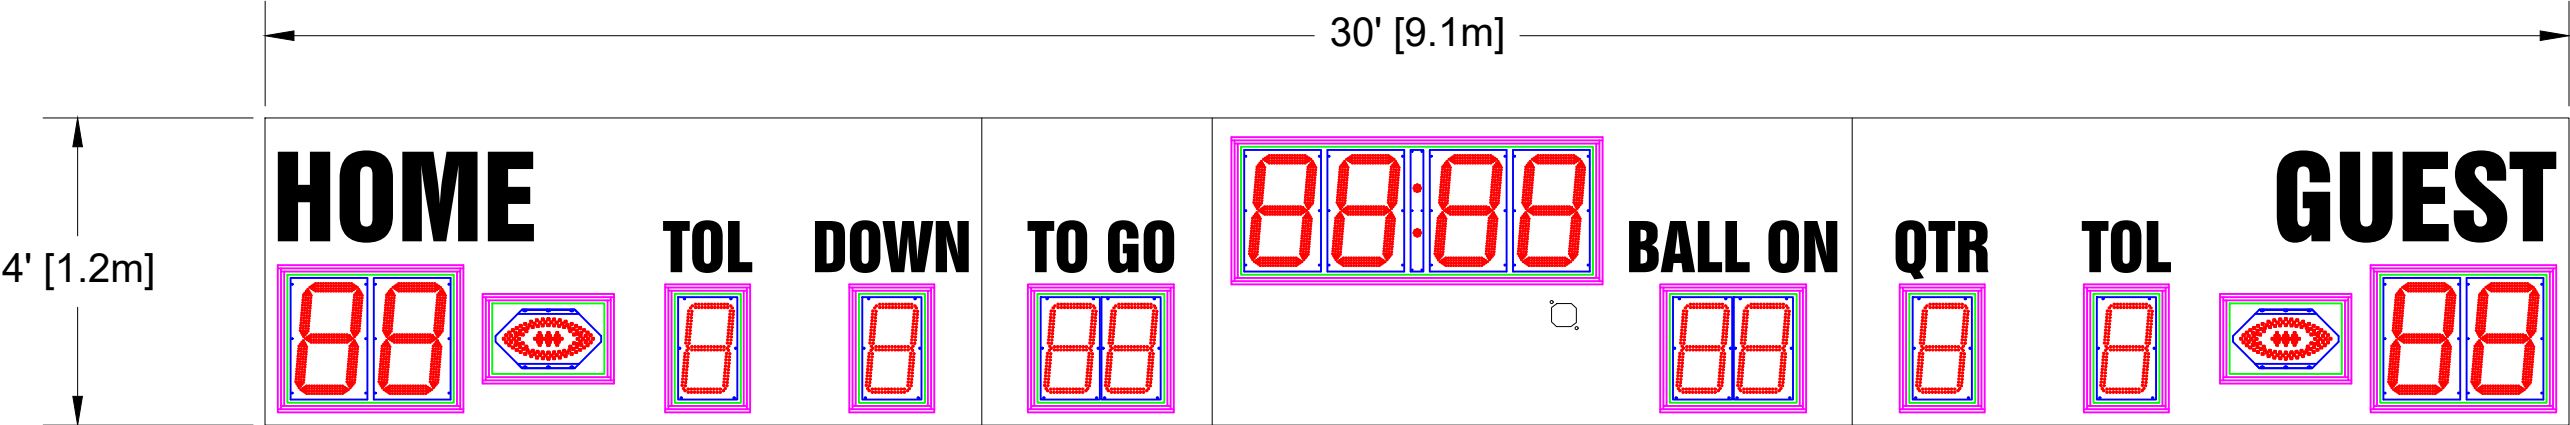

Scoreboard Specifications

Overall size: 30' (W) x 4' (H) x 6" (D)
Approximate Weight: 660 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the TIME Digits.

17" LED Digits for TIME, SCORE
14" LED Digits for DOWN, TO GO, BALL ON, QTR, TOL

14" White Vinyl Lettering for HOME, GUEST
8" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR, TOL

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	9/7/2022
		<div><div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>	
		DESCRIPTION OES ELECTRONIC SCOREBOARDS M8030AxCV	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		SIZE A	FILENAME M8030AXCV USAGE USE FOR REVIEW
THIRD ANGLE PROJECTIONS <div><div></div><div></div></div>		INIT DRAWING DATE 9/7/22	REV A
SCALE NTS		DRAWN BY RDONALD	PAGE 1 OF 1