

Scoreboard Specifications

Overall size: 9'11" (W) x 4'11" (H) x 6" (D) Approximate Weight: 255 lbs Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 8 Amps. Requires an earth ground connection. Incoming Mains Power and Data Location: Behind the [INNING] Digit(s).

17" LED Digits for SCORE, INNING, CLOCK 2" LED Dots for BALL, STRIKE, OUT, H, E

7" White Vinyl Lettering for HOME, GUEST, INNING 5" White Vinyl Lettering for BALL, STRIKE, OUT, H, E


All LED digits include the following:


- Shatter Resistant Lexan cover *
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

	REVISION	D		
	А	١N		
NOTICE TO PERSON RECEIV TECHNICAL INFORMATION:				
DISC PROF SUCI	INC. CLAIMS PROPER LOSED HEREIN. THIS PRIETARY MATERIAL HIS NOT TO BE COPI WITHOUT PRIOR WR	DI DE ED		

TOLERANCE INFORMATION Dimensions are in Inches

Fractional \pm 1/16" Two Place Decimals \pm 0.02" Three Place Decimals \pm 0.005" Four Place Decimals \pm 0.0005" Angular ± 30'

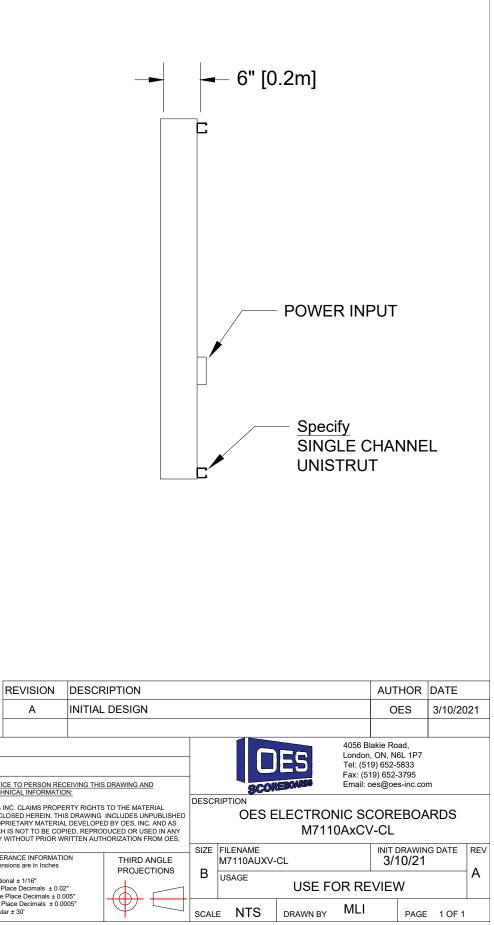

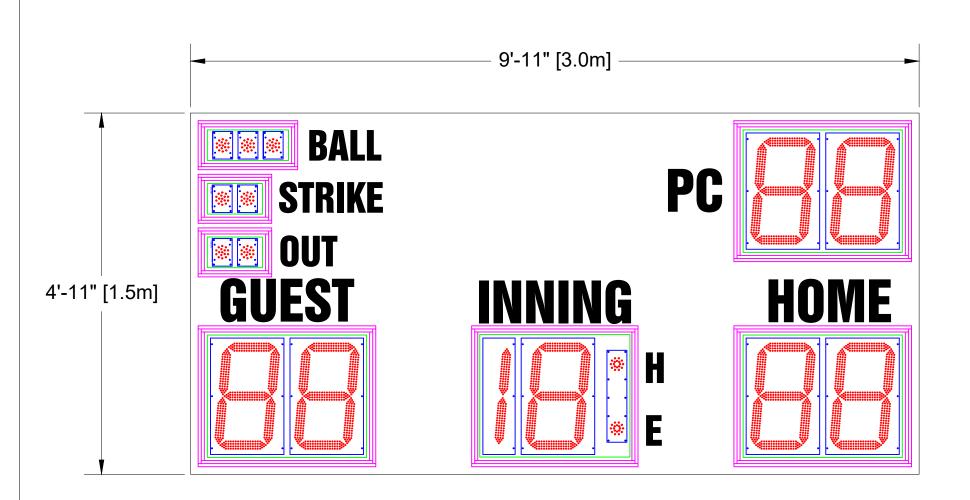

Scoreboard Specifications

Overall size: 9'11" (W) x 4'11" (H) x 6" (D) Approximate Weight: 239 lbs Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 8 Amps. Requires an earth ground connection. Incoming Mains Power and Data Location: Behind the [INNING] Digit(s).

17" LED Digits for SCORE, INNING, PITCH COUNT 2" LED Dots for BALL, STRIKE, OUT, H, E

7" White Vinyl Lettering for HOME, GUEST, INNING, PITCH COUNT 5" White Vinyl Lettering for BALL, STRIKE, OUT, H, E


All LED digits include the following:


- Shatter Resistant Lexan cover *
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

	REVISION	D		
	А	11		
NOTICE TO PERSON RECEIV TECHNICAL INFORMATION:				
OES INC. CLAIMS PROPERT DISCLOSED HEREIN. THIS D PROPRIETARY MATERIAL DI SUCH IS NOT TO BE COPIED WAY WITHOUT PRIOR WRIT INC.				

TOLERANCE INFORMATION Dimensions are in Inches

Fractional \pm 1/16" Two Place Decimals \pm 0.02" Three Place Decimals \pm 0.005" Four Place Decimals \pm 0.0005" Angular ± 30'

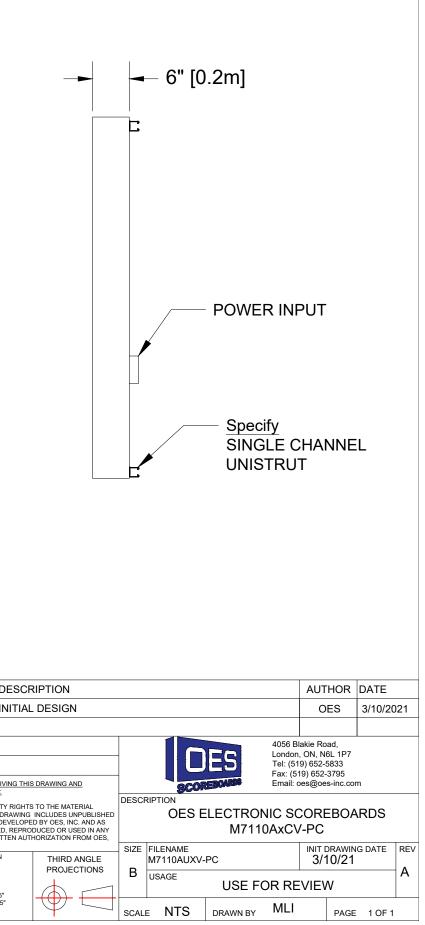

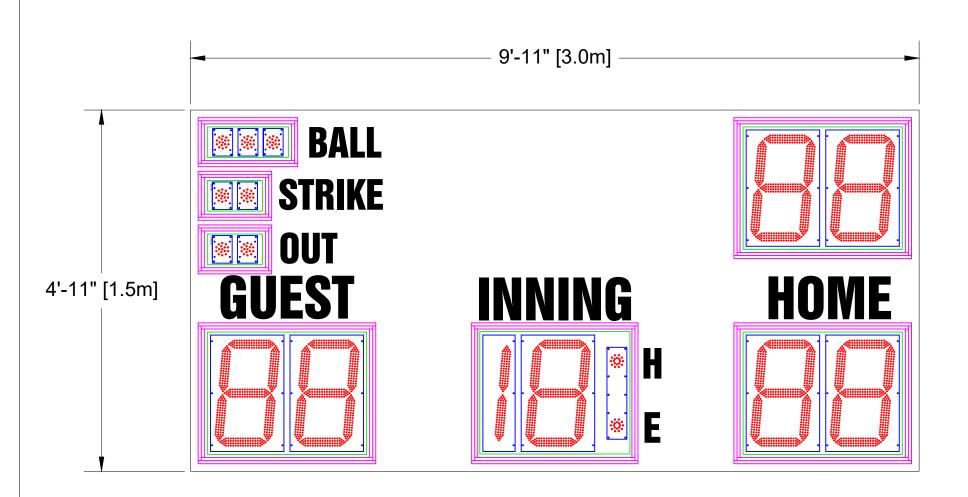

Scoreboard Specifications

Overall size: 9'11" (W) x 4'11" (H) x 6" (D) Approximate Weight: 255 lbs Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 8 Amps. Requires an earth ground connection. Incoming Mains Power and Data Location: Behind the [INNING] Digit(s).

17" LED Digits for SCORE, INNING, TIMER 2" LED Dots for BALL, STRIKE, OUT, H, E

7" White Vinyl Lettering for HOME, GUEST, INNING 5" White Vinyl Lettering for BALL, STRIKE, OUT, H, E

All LED digits include the following:

- Shatter Resistant Lexan cover *
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

	А	11
	CE TO PERSON RECI INICAL INFORMATIO	
DISC PROF SUCI	INC. CLAIMS PROPER LOSED HEREIN. THIS PRIETARY MATERIAL HIS NOT TO BE COPI WITHOUT PRIOR WR	DI DI EC

TOLERANCE INFORMATION Dimensions are in Inches

Fractional \pm 1/16" Two Place Decimals \pm 0.02" Three Place Decimals \pm 0.005" Four Place Decimals \pm 0.0005" Angular ± 30'

