
# **SEE THRU SHOTCLOCK - SMALL**

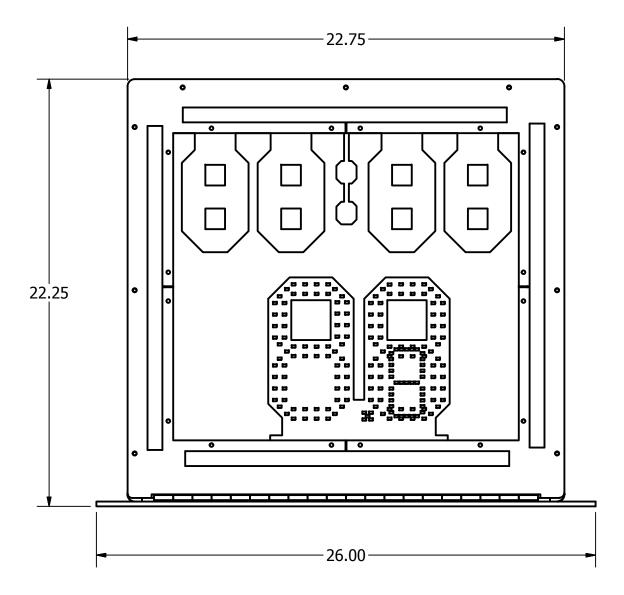

3.25

SCOREBOARD SPECIFICATIONS:

OVERALL SIZE: 22.75(W) x 22.25(H) x 3.25(DP)


LED SPECIFICATIONS: 5" LED DIGITS (GAME TIME)

7" LED DIGITS (SHOT CLOCK TIME WITH TENTHS OF SECOND)


REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
Α	INITIAL DESIGN	26/01/2011	JB
В	ADDED BASE PLATE VIEW ON PAGE 2	13/01/2012	QH
С	INCREASED AMERAGE TO 8 AMPS, NEW CONNECTOR MOUNTING HOLES	21/11/2012	MK


ELECTRICAL SPECIFICATIONS: 110 VAC, 60HZ / 8AMP


APPROX. WEIGHT - 40LBS

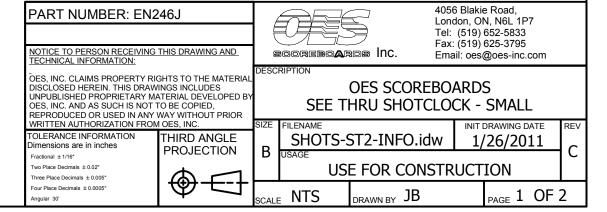



# SEE THRU SHOTCLOCK - SMALL BASE PLATE DIMENSIONS

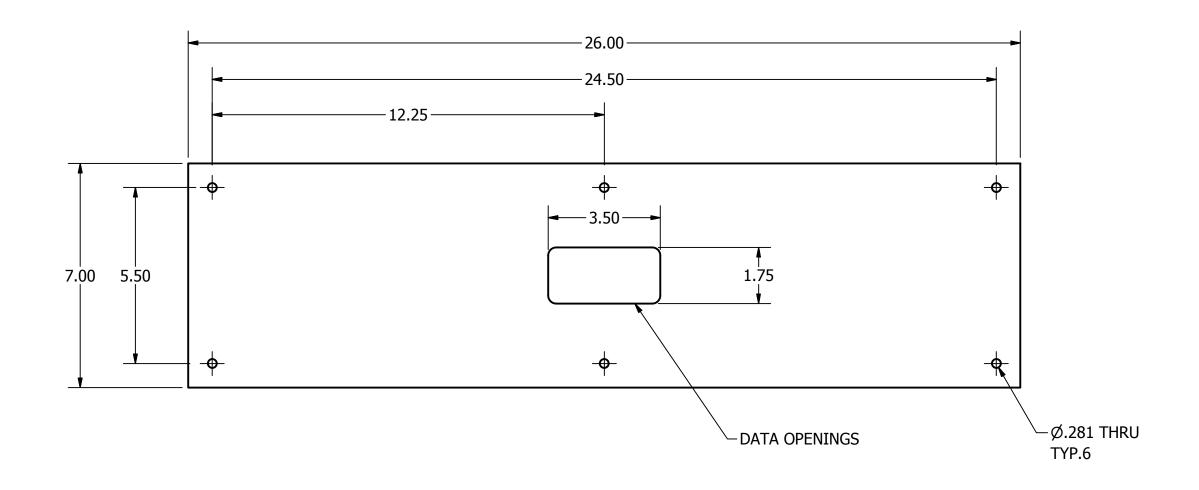


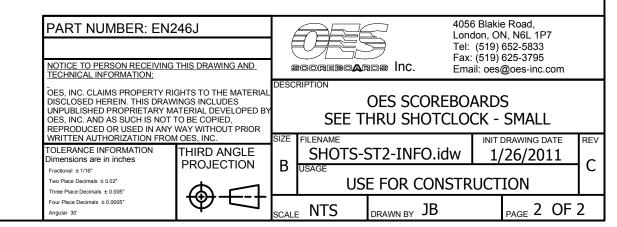



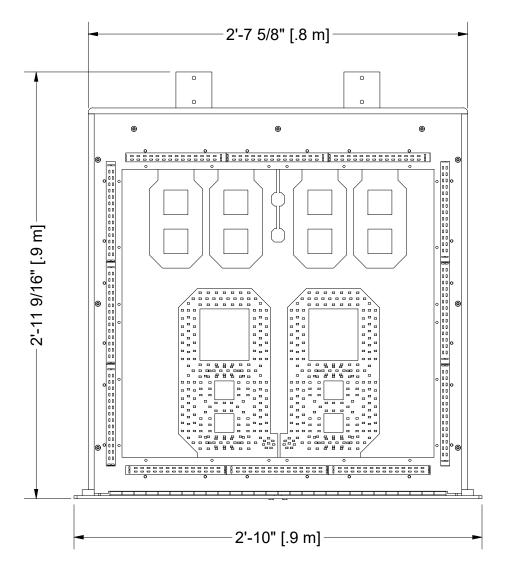

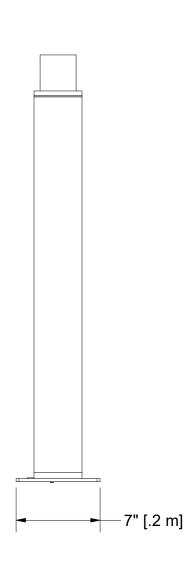

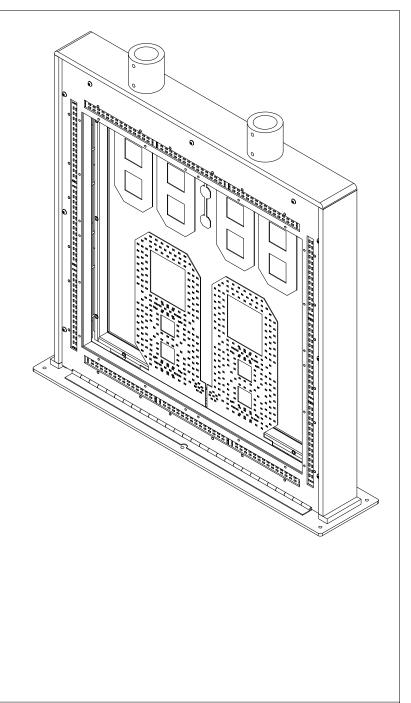

#### **REVISION HISTORY REV DESCRIPTION** DATE **AUTHOR** 2019-11-13 **INITIAL DESIGN** MLi Α UPDATE TO NEW TEMPLATE 2023-09-21 RDonald 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795

WRITTEN AUTHORIZATION FROM OES INC.

TOLERANCE INFORMATION

ractional ± 1/16"

hree Place Decimals ± 0.005"

## NOTICE TO PERSON RECEIVING THIS DRAWING AND **ELECTRICAL SPECIFICATIONS**

**Electrical Ratings:** 

- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz. Requires an earth ground connection.

- MAX Current: 8 Amps

### 14" LED Digits for SHOT CLOCK 7" LED Digits for GAME CLOCK

**SCOREBOARD SPECIFICATIONS** 

Overall size: 2' 10" (W) x 2' 11-9/16" (H) x 7" (D)

Approximate Weight: 45 lbs

All LED digits include the following:

- \*Shatter Resistant Lexan cover
- \*Conformal coating to protect from environmental conditions
- \*Surface Mount Technology LEDs allowing for wide viewing angle



2019-11-13 REV THIRD ANGLE ST-LARGE.idw BUSAGE PROJECTION **USE FOR REVIEW** SCALE NTS PAGE 1 OF 1 DRAWN BY MLi

Email: oes@oes-inc.com